


Health and Safety Plan for OU 7-10 Glovebox Excavator Method Project Operations

*Bruce P. Miller
May 2003*

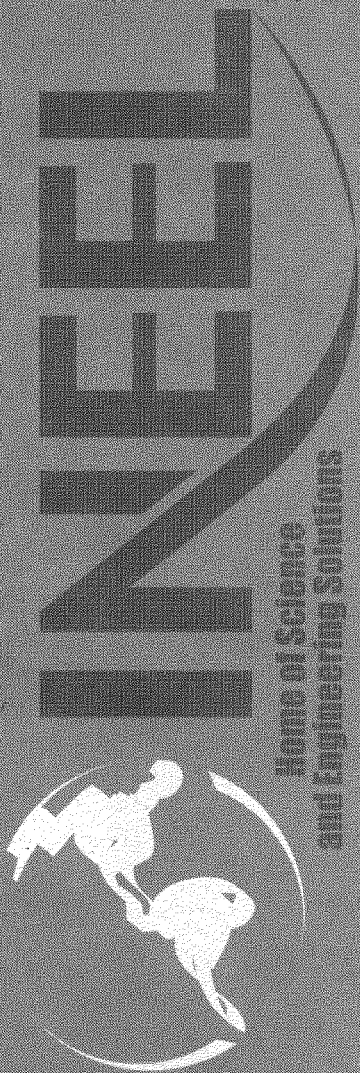

*Idaho National Engineering and Environmental Laboratory
Bechtel BWXT Idaho, LLC*

INEEL/EXT-02-01117
Revision 1
Project No. 021052

Health and Safety Plan for OU 7-10 Glovebox Excavator Method Project Operations

Bruce P. Miller

**Vortex Enterprises, Inc.
Idaho Falls, Idaho**

May 2003

**Idaho National Engineering and Environmental Laboratory
Environmental Restoration Program
Idaho Falls, Idaho 83415**


**Prepared under Subcontract No. 00000133-0001
for the U.S. Department of Energy
Assistant Secretary for Environmental Management
Under DOE Idaho Operations Office
Contract DE-AC07-99ID13727**

Health and Safety Plan for OU 7-10 Glovebox Excavator Method Project Operations

INEEL/EXT-02-1117
Revision 1
Project No. 021052

May 2003

Approved by



Mike T. Dicken, Bechtel BWXT Idaho, LLC
Operable Unit 7-10 Glovebox Excavator
Method Project Operations Department
Manager

5/1/03

Date



Mike Pratt, Bechtel BWXT Idaho, LLC
Operable Unit 7-10 Glovebox Excavator
Method Project Manager

4/30/03

Date

ABSTRACT

This health and safety plan establishes the procedures and requirements used to eliminate or minimize health and safety risks to personnel performing operational tasks within the Operable Unit 7-10 Glovebox Excavation Method Project operational areas at the Subsurface Disposal Area of the Radioactive Waste Management complex at the Idaho National Engineering and Environmental Laboratory. This plan has been prepared to meet Occupational Safety and Health Administration standard, 29 *Code of Federal Regulations* 1910.120 (2002), “Hazardous Waste Operations and Emergency Response Requirements.”

This plan contains the assessment and associated mitigation of safety, health, and radiological hazards for conducting operational activities within the Operable Unit 7-10 Project operations area. Safety, health, and radiological professionals assigned to support Operable Unit 7-10 Project operations will define the most appropriate hazard control and mitigation measures based on operations-specific conditions and will make changes to this plan and associated work control documents as appropriate.

CONTENTS

ABSTRACT.....	iii
ACRONYMS.....	xiii
1. WORK SCOPE.....	1-1
1.1 Purpose	1-1
1.2 Applicability and Jurisdiction	1-1
1.3 Site Description of the Idaho National Engineering and Environmental Laboratory.....	1-1
1.4 History	1-3
1.5 Background and Description of the Radioactive Waste Management Complex	1-3
1.6 Background and Description of the Operable Unit 7-10 Glovebox Excavator Method Project.....	1-4
1.7 Project Facility Overview	1-6
1.8 Project Key Facility Components.....	1-9
1.8.1 Weather Enclosure Structure	1-9
1.8.2 Retrieval Confinement Structure	1-9
1.8.3 Excavator.....	1-14
1.8.4 Packaging Glovebox System	1-14
1.8.5 Drum Loadout Enclosures.....	1-15
1.8.6 Personnel Monitoring, Personnel Access, and Transfer Vestibules.....	1-15
1.8.7 Interim Storage Pad.....	1-16
1.8.8 Comprehensive Environmental Response, Compensation, and Liability Act—Compliant Storage	1-16
1.8.9 Overburden Staging Area.....	1-17
1.8.10 Fire Riser Building.....	1-17
1.8.11 Radioassay Facility	1-17
1.8.12 Radiological Control and Security Trailer	1-17
1.9 Project Operations and Processes.....	1-17
1.9.1 Overburden Removal	1-17
1.9.2 Waste Zone Material Removal	1-18
1.9.3 Packaging Glovebox System Operation.....	1-19
1.9.4 Postretrieval and Packaging Operations.....	1-22
1.10 Program Interfaces	1-24

2.	HAZARD IDENTIFICATION AND MITIGATION	2-1
2.1	Chemical and Radiological Hazards and Mitigation	2-1
2.1.1	Routes of Exposure	2-3
2.2	Safety and Physical Hazards and Mitigation	2-25
2.2.1	Material Handling and Back Strain.....	2-25
2.2.2	Repetitive Motion and Musculoskeletal Disorders	2-25
2.2.3	Working and Walking Surfaces	2-25
2.2.4	Proper Housekeeping to Prevent Slips, Trips, and Falls	2-25
2.2.5	Elevated Work Areas	2-26
2.2.6	Means of Egress.....	2-26
2.2.7	Powered Equipment and Tools	2-26
2.2.8	Electrical Hazards and Energized Systems	2-27
2.2.9	Operational Fire Hazards and Prevention.....	2-27
2.2.10	Flammable and Combustible Materials Hazards	2-28
2.2.11	Pressurized Systems	2-28
2.2.12	Cryogenics.....	2-29
2.2.13	Compressed Gases	2-29
2.2.14	Excavator, Equipment, and Vehicle Hazards	2-29
2.2.15	Excavation, Surface Penetrations, and Outages.....	2-30
2.2.16	Hoisting and Rigging of Equipment	2-32
2.2.17	Overhead Hazards.....	2-32
2.2.18	Personal Protective Equipment.....	2-32
2.2.19	Decontamination.....	2-33
2.3	Environmental Hazards and Mitigation	2-33
2.3.1	Noise	2-33
2.3.2	Heat and Cold Stress and Ultraviolet Light Hazards	2-34
2.3.3	Confined Spaces	2-37
2.3.4	Biological Hazards.....	2-37
2.3.5	Inclement Weather Conditions	2-38
2.4	Other Project Hazards.....	2-38
2.5	Site Inspections	2-38
3.	EXPOSURE MONITORING AND SAMPLING.....	3-1
3.1	Airborne Exposure Engineering Controls.....	3-1
3.2	Exposure Limits	3-12
3.3	Environmental and Personnel Monitoring	3-12
3.3.1	Industrial Hygiene Area and Personal Monitoring and Instrument Calibration	3-12
3.3.2	Radiological Monitoring and Instrument Calibration	3-13

3.3.3	Fissile Material Monitoring	3-13
3.3.4	Personnel Radiological Exposure Monitoring	3-14
4.	ACCIDENT AND EXPOSURE PREVENTION	4-1
4.1	Voluntary Protection Program and Integrated Safety Management System	4-1
4.2	General Safe-Work Practices	4-1
4.3	Subcontractor Responsibilities	4-3
4.4	Radiological and Chemical Exposure Prevention	4-4
4.4.1	Radiological Exposure Prevention—As Low as Reasonably Achievable Principles	4-4
4.4.2	Chemical and Physical Hazard Exposure Avoidance	4-7
4.5	Buddy System	4-8
5.	PERSONAL PROTECTIVE EQUIPMENT	5-1
5.1	Respiratory Protection	5-3
5.2	Personal Protective Equipment Levels	5-3
5.2.1	Level D Personal Protective Equipment	5-3
5.2.2	Level C Personal Protective Equipment	5-3
5.2.3	Level B Personal Protective Equipment	5-6
5.2.4	Level A Personal Protective Equipment	5-6
5.3	Personal Protective Clothing Upgrading and Downgrading	5-6
5.3.1	Upgrading Criteria for Personal Protective Equipment	5-6
5.3.2	Downgrading Criteria	5-6
5.4	Inspection of Personal Protective Equipment	5-7
6.	PERSONNEL TRAINING	6-1
6.1	Training	6-1
6.2	Personnel Selection	6-1
6.3	Qualification and Certification Processes	6-1
6.4	Implementation of Training	6-2
6.5	Training Records	6-4
6.6	Project Operations-Specific Training	6-4
6.7	Prejob and Postjob Briefings and Safety Meetings	6-4

7.	SITE CONTROL AND SECURITY	7-1
7.1	Radiological Confinement Zones	7-1
7.2	Radiologically Contaminated Material Release	7-2
7.3	Site Security	7-2
7.4	Wash Facilities and Sanitation	7-2
7.5	Designated Eating Areas and Smoking Area	7-2
8.	OCCUPATIONAL MEDICAL SURVEILLANCE	8-1
8.1	Project Operations Subcontractor Workers	8-2
8.2	Injuries at the Operable Unit 7-10 Project Site	8-2
8.3	Substance-Specific Medical Surveillance	8-4
9.	PERSONNEL ROLES AND RESPONSIBILITIES	9-1
9.1	Project Operations Personnel	9-2
9.1.1	Project Operations Management	9-2
9.1.2	Shift Operations	9-2
9.1.3	Environment, Safety, Health, and Quality Assurance	9-3
9.1.4	Operations Support	9-4
9.1.5	Visitors	9-5
10.	EMERGENCY RESPONSE PLAN	10-1
10.1	Preemergency Planning	10-1
10.2	Emergency Preparation and Recognition	10-2
10.3	Emergency Facilities and Equipment	10-2
10.4	Emergency Communications	10-3
10.4.1	Notifications	10-4
10.5	Personnel Roles, Lines of Authority, and Training	10-4
10.5.1	Idaho National Engineering and Environmental Laboratory Emergency Response Organization	10-4
10.5.2	Role of Operations Personnel in Emergencies	10-4
10.6	Emergency Alerting, Responses, and Sheltering	10-6
10.6.1	Alarms	10-6

10.7	Evacuation Assembly Areas and Central Facilities Area Medical Facility	10-8
10.8	Medical Emergencies and Decontamination.....	10-8
10.9	Reentry, Recovery, and Site Control	10-8
10.9.1	Reentry	10-8
10.9.2	Recovery	10-11
10.10	Critique of Response and Follow-up	10-11
10.11	Telephone and Radio Contact Reference List.....	10-11
11.	DECONTAMINATION PROCEDURES	11-1
11.1	Contamination Control and Prevention	11-1
11.2	Equipment and Personnel Decontamination	11-2
11.2.1	Equipment Decontamination	11-2
11.2.2	Personnel Decontamination	11-2
11.2.3	Decontamination in Medical Emergencies	11-3
11.3	Doffing Personal Protective Equipment and Decontamination	11-3
11.3.1	Modified Level D Personal Protective Equipment Doffing and Decontamination	11-4
11.3.2	Level C Personal Protective Equipment Doffing and Decontamination	11-4
11.3.3	Level B Personal Protective Equipment Doffing and Decontamination	11-4
11.4	Personnel Radiological Contamination Monitoring	11-4
11.5	Storage and Disposal of Operational Waste Materials	11-5
11.6	Project Sanitation and Waste Minimization.....	11-5
12.	RECORDKEEPING REQUIREMENTS	12-1
12.1	Industrial Hygiene and Radiological Monitoring Records	12-1
12.2	Records Management	12-1
13.	REFERENCES.....	13-1

FIGURES

1-1.	Map of the Radioactive Waste Management Complex at the Idaho National Engineering and Environmental Laboratory	1-2
1-2.	Location of dig area of Operable Unit 7-10 within the Subsurface Disposal Area at the Radioactive Waste Management Complex	1-5
1-3.	Plan view of the Operable Unit 7-10 Glovebox Excavator Method Project area showing project site structures	1-7
1-4.	Waste Management Facility-671 Weather Enclosure Structure housing the Retrieval Confinement Structure and the Packaging Glovebox System	1-8
1-5.	Drawing showing layout of individual gloveboxes for the Operable Unit 7-10 Glovebox Excavator Method Project inside Waste Management Facility-671 Weather Enclosure Structure.....	1-11
1-6.	External excavator to the Retrieval Confinement Structure boot assembly.....	1-13
1-7.	Four major functions associated with the Operable Unit 7-10 Glovebox Excavator Method Project facility shutdown process.....	1-22
9-1.	Operations organizational interfaces for the Operable Unit 7-10 Glovebox Excavator Method Project	9-1
10-1.	Evacuation and assembly areas at the Radioactive Waste Management Complex	10-9
10-2.	Map showing the route to the nearest medical facility (Central Facilities Area-1612)	10-10

TABLES

2-1.	Dominant waste forms in the Stage I (project excavation) area.....	2-2
2-2.	Total activities for radiological contaminants in Operable Unit 7-10 decayed to 34 years (1969–2003) using RadDecay.....	2-4
2-3.	Chemical inventory for Operable Unit 7-10 and the Stage I area	2-5
2-4.	Evaluation of chemicals and potential agents that may be encountered.....	2-6
2-5.	Summary of project operational activities, associated hazards, and mitigation.....	2-16
2-6.	Heat stress signs and symptoms of exposure	2-35
2-7.	Cold stress work and warm-up schedule	2-36
3-1.	Tasks and hazards to be monitored, frequency, and monitoring instrument category	3-2
3-2.	Monitoring instrument category and description	3-4

3-3.	Action levels and associated responses for project operational hazards.....	3-5
5-1.	Respiratory and protective clothing selection guidance	5-2
5-2.	Levels and options of personal protective equipment	5-4
5-3.	Inspection checklist for personal protection equipment	5-8
6-1.	Minimum required training for access to Operable Unit 7-10 Project operational areas	6-3
10-1.	Emergency response equipment to be maintained at the Operable Unit 7-10 Project site during operations.....	10-3
10-2.	Responsibilities during an emergency	10-5
10-3.	Operable Unit 7-10 Project emergency contact list.....	10-12

ACRONYMS

ACGIH	American Conference of Governmental Industrial Hygienists
ALARA	as low as reasonably achievable
ANSI	American National Standards Institute
CAM	constant air monitor
CAS	criticality alarm system
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CFA	Central Facilities Area
CFR	<i>Code of Federal Regulations</i>
CPR	cardiopulmonary resuscitation
D&D&D	deactivation, decontamination, and decommissioning
dBA	decibel A-weighted
DOE	U.S. Department of Energy
DOE-ID	U.S. Department of Energy Idaho Operations Office
DSS	dust-suppression system
EPA	U.S. Environmental Protection Agency
ERO	Emergency Response Organization
FFA/CO	Federal Facility Agreement and Consent Order
FFS	Facility Floor Structure
FGE	fissile gram equivalent
FMM	fissile material monitor
GI	gastrointestinal
HASP	health and safety plan
HAZWOPER	Hazardous Waste Operations and Emergency Response
HEPA	high-efficiency particulate air
ICDF	INEEL CERCLA Disposal Facility

IDLH	immediately dangerous to life or health
IH	industrial hygienist
INEEL	Idaho National Engineering and Environmental Laboratory
ISMS	Integrated Safety Management System
JSA	job safety analysis
LEL	lower explosive limit
LO/TO	lockout and tagout
MCP	management control procedure
MSDS	material safety datasheet
NFM	nuclear facility manager
NFPA	National Fire Protection Association
NIOSH	National Institute of Occupational Safety and Health
NRR	noise reduction rating
OMP	Occupational Medical Program
OSHA	Occupational Safety and Health Administration
OU	operable unit
PC	performance criterion
PCB	polychlorinated biphenyl
PCM	personal contamination monitor
PEL	permissible exposure limit
PGS	Packaging Glovebox System
PPE	personal protective equipment
PRD	program requirements document
RadCon	Radiological Control
RCIMS	Radiological Control and Information Management System
RCM	<i>Radiological Control Manual</i>

RCRA	Resource Conservation and Recovery Act
RCS	Retrieval Confinement Structure
RCT	radiological control technician
ROD	record of decision
RW	radiological worker
RWMC	Radioactive Waste Management Complex
RWP	radiological work permit
SCBA	self-contained breathing apparatus
SDA	Subsurface Disposal Area
STD	standard
SWP	safe work permit
TLD	thermoluminescent dosimeter
TLV	threshold limit value
TPR	technical procedure
TRU	transuranic
TSDF	Treatment, Storage, and Disposal Facility
TWA	time-weighted average
UV	ultraviolet
VPP	Voluntary Protection Program
WAC	waste acceptance criteria
WCC	Warning Communications Center
WES	Weather Enclosure Structure
WMF	Waste Management Facility

Health and Safety Plan for OU 7-10 Glovebox Excavator Method Project Operations

1. WORK SCOPE

1.1 Purpose

This health and safety plan (HASP) identifies health and safety hazards and requirements used to eliminate or minimize the hazards during Operable Unit (OU) 7-10 Glovebox Excavator Method Project operations within the Subsurface Disposal Area (SDA) of the Radioactive Waste Management complex (RWMC), located at the Idaho National Engineering and Environmental Laboratory (INEEL). This HASP has been written to meet the requirements of the Occupational Safety and Health Administration (OSHA) *Code of Federal Regulations* (CFR) standard, 29 CFR 1910.120 (2002), “Hazardous Waste Operations and Emergency Response.”

This HASP has been prepared to address OU 7-10 Project operational hazards and associated mitigation based on general operations within the OU 7-10 Project operationally controlled area at the RWMC. This HASP is applicable to all operational activities following construction through facility layup (but not including deactivation, decontamination, and decommissioning). This plan and additional job safety analyses (JSAs), operational technical procedures (TPRs), and management control procedures (MCPs) will further define OU 7-10 Project operational hazards, hazard mitigation, and procedural requirements as the facility begins operation and new hazards are identified. This HASP will be reviewed and revised, as appropriate, by OU 7-10 Project Industrial Hygiene, Industrial Safety, and Radiological Control (RadCon) operations personnel to ensure its effectiveness and suitability for OU 7-10 Project operations.

1.2 Applicability and Jurisdiction

Project operations will be conducted under the administrative controls of a safety analysis. Technical procedures, JSAs, and other appropriate project health and safety evaluations will be conducted to ensure operations are conducted in compliance with the facility authorization basis. Project operations will fall within the jurisdiction of the RWMC operations director. This HASP applies to all personnel conducting OU 7-10 Project operational activities in these areas.

1.3 Site Description of the Idaho National Engineering and Environmental Laboratory

The INEEL is a U.S. government-owned test site located (32 mi) west of Idaho Falls in southeastern Idaho (see Figure 1-1) and managed by the U.S. Department of Energy (DOE). The INEEL encompasses approximately 2,305 m² (890 mi²) of the northeastern portion of the Eastern Idaho Snake River Plain. The Eastern Idaho Snake River Plain is a relatively flat, semiarid, sagebrush desert with predominant relief being manifested either as volcanic buttes jutting up from the desert floor or as unevenly surfaced basalt flows or flow vents and fissures. Elevations on the INEEL range from 2,003 m (6,572 ft) in the southeast to 1,448 m (4,750 ft) in the central lowlands, with an average elevation of 1,516 m (4,975 ft). Drainage within and around the plain recharges the Snake River Plain Aquifer, a sole-source aquifer that flows beneath the INEEL and surrounding area. The aquifer is approximately 137 m (450 ft) below ground surface within the Site boundaries. Regional groundwater flow is southwest at average estimated velocities of 1.5 m/day (5 ft/day).

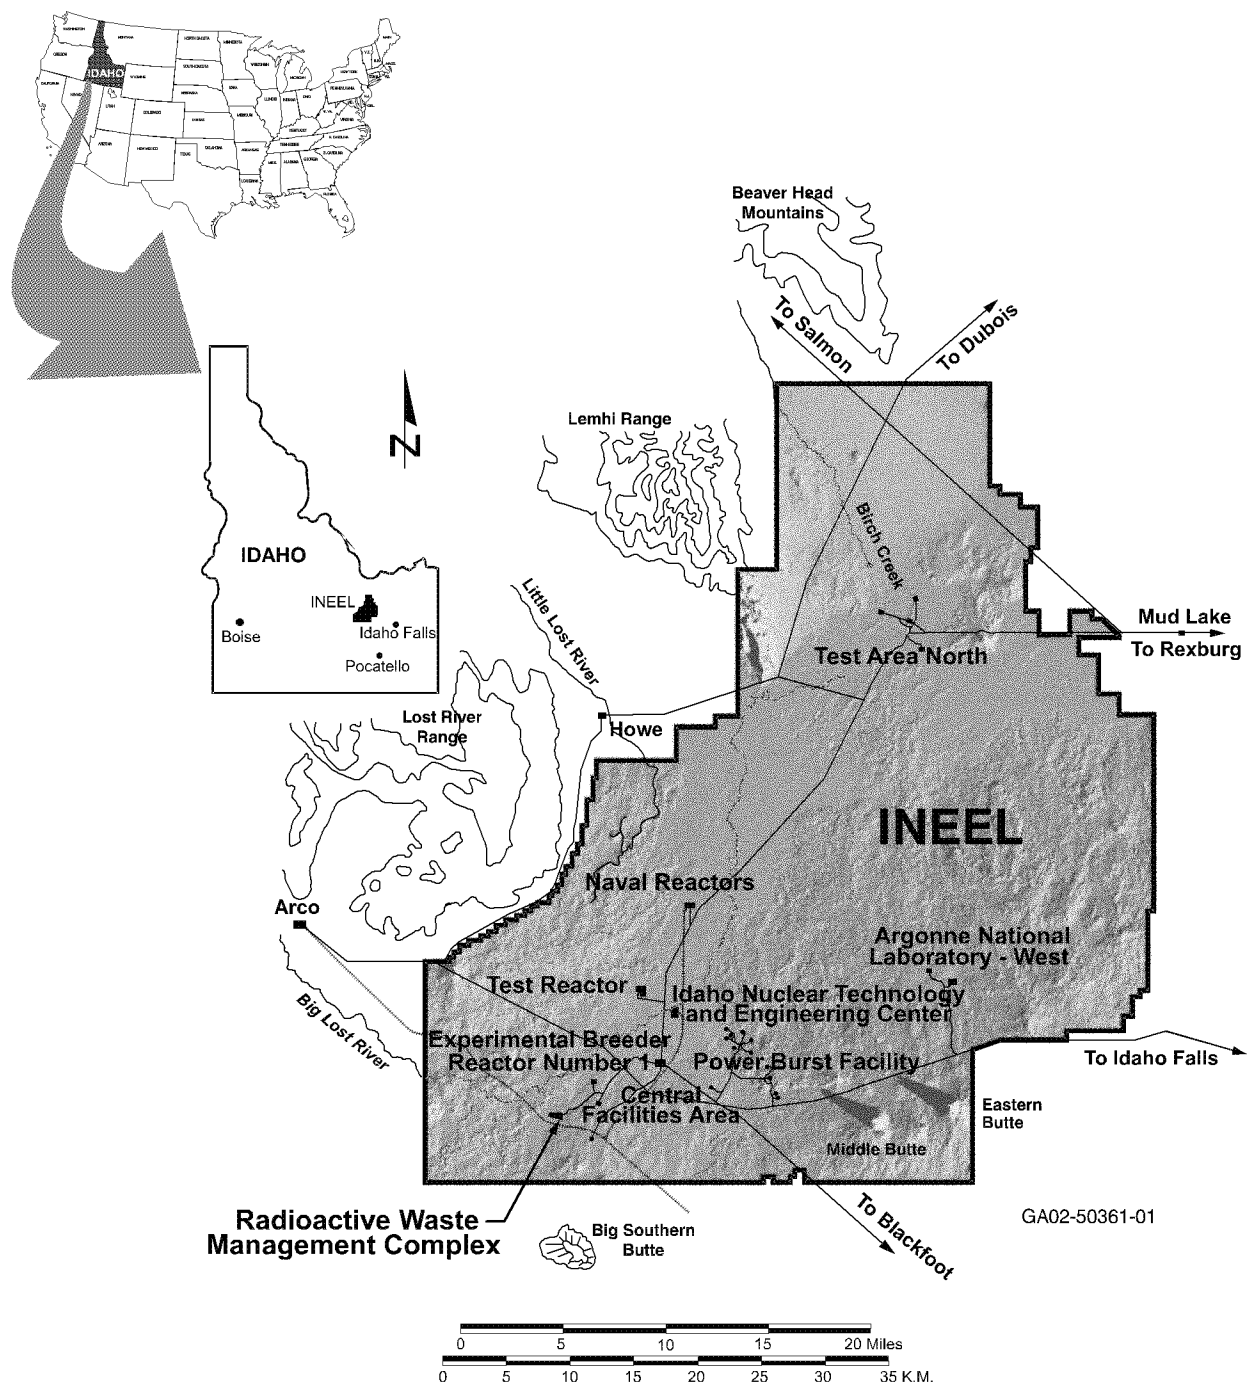


Figure 1-1. Map of the Radioactive Waste Management Complex at the Idaho National Engineering and Environmental Laboratory.

1.4 History

The U.S. Atomic Energy Commission initially established the Site in 1949 as the National Reactor Testing Station for nuclear energy research and related activities. In 1952, the Site expanded its function and began accepting shipments of transuranic (TRU) radionuclides and radioactive low-level waste. In 1974, it was redesignated the Idaho National Engineering Laboratory, and then, in 1997, to reflect the expansion of its mission to include a broader range of engineering and environmental management activities, the name was changed to INEEL. Currently, the INEEL is used to support the engineering efforts and operations of the DOE and other federal agencies in areas of nuclear safety research, reactor development, reactor operations and training, nuclear defense materials production, waste management technology development, and energy technology and conservation programs. The U.S. Department of Energy Idaho Operations Office (DOE-ID) has responsibility for the INEEL and delegates authority to operate the INEEL to government contractors. Bechtel BWXT Idaho, LLC, is the current management and operating contractor for the INEEL.

1.5 Background and Description of the Radioactive Waste Management Complex

The RWMC was established in the early 1950s as a disposal site for solid low-level waste generated by operations at the INEEL and other DOE laboratories. Radioactive waste materials were buried in underground pits, trenches, soil vault rows, and one aboveground pad (Pad A) at the SDA. Transuranic waste is kept in interim storage in containers on asphalt pads at the Transuranic Storage Area. Radioactive waste from the INEEL was disposed of in the SDA starting in 1952. Rocky Flats Plant (RFP)^a TRU waste was disposed of in the SDA from 1954 to 1970. Post 1970 transuranic waste is kept in interim storage in containers on asphalt pads at the Transuranic Storage Area.

In August 1987, in accordance with the Resource Conservation and Recovery Act (RCRA), Section 3008(h) (42 USC § 6901 et seq., 1976), the DOE and the U.S. Environmental Protection Agency (EPA) entered into a Consent Order and Compliance Agreement (DOE-ID 1987). The Consent Order and Compliance Agreement required DOE to conduct an initial assessment and screening of all solid and hazardous waste disposal units at the INEEL and set up a process for conducting any necessary corrective actions. On July 14, 1989, the EPA (under the authority granted to them by the Comprehensive Environmental Response, Compensation and Liability Act [CERCLA] of 1980 [42 USC § 9601 et seq., 1980], as amended by the Superfund Amendments and Reauthorization Act of 1986 [Public Law 99-499, 1986]) proposed that the INEEL be listed on the National Priorities List (54 FR 29820). The final rule that listed the INEEL on the National Priorities List was published on November 21, 1989, in 54 FR 48184 (1989). On December 4, 1991, because of the INEEL's listing on the National Priorities List, DOE, EPA, and the Idaho Department of Health and Welfare entered into the *Federal Facility Agreement and Consent Order for the Idaho National Engineering Laboratory* (DOE-ID 1991). The Federal Facility Agreement and Consent Order (FFA/CO) established the procedural framework and schedule for developing, prioritizing, implementing, and monitoring response actions at the INEEL in accordance with CERCLA (42 USC 6901 et seq., 1976), RCRA, and the Idaho Hazardous Waste Management Act.

a. The Rocky Flats Plant, located 26 km (16 mi) northwest of Denver, Colorado, was renamed the Rocky Flats Environmental Technology Site in the mid-1990s. In the late 1990s it was again renamed to its present name, the Rocky Flats Plant Closure Project.

1.6 Background and Description of the Operable Unit 7-10 Glovebox Excavator Method Project

Operable Unit 7-10 (see Figure 1-2) was identified for an interim action under the FFA/CO (DOE-ID 1991), as described in the Record of Decision: Declaration of Pit 9 at the Radioactive Waste Management complex Subsurface Disposal Area at the Idaho National Engineering Laboratory, Idaho Falls, Idaho (DOE-ID 1993). Under the FFA/CO, the INEEL is divided into 10 waste area groups (WAGs). These WAGs are further subdivided into OUs. The RWMC has been designated as Waste Area Group 7 and was subdivided into 13 OUs. Pit 9 comprises OU 7-10.

The 1993 OU 7-10 Record of Decision (ROD) (DOE-ID 1993) and the 1998 Explanation of Significant Differences specify environmental remediation of TRU waste from OU 7-10. Initially, remediation of OU 7-10 was to be conducted under a subcontract. Later, after experiencing delays, the remediation was divided into three stages:

- Stage I included the in situ TRU waste characterization through probe holes and core sample retrieval and analysis
- Stage II included the retrieval of all materials from a 20 × 20-ft area of the pit down to bedrock
- Stage III would rely on information obtained during Stages I and II to determine the appropriate interim action for the remainder of OU 7-10.

Stage II retrieval 90% design was developed between DOE-ID, the Idaho Department of Environmental Quality, and the EPA. It was a complex design that provided for methodical waste retrieval as well as precise recovery of in situ characterization data. Because the Stage II 90% design was time consuming to build and operate, DOE requested a schedule extension for its implementation. The Idaho Department of Environmental Quality and the EPA denied the request, which led DOE to implement a formal dispute resolution process described by the INEEL FFA/CO. As part of the dispute resolution process, INEEL conducted a study to find a safe, faster, and less costly means to conduct the Stage II retrieval demonstration. On July 23, 2001, the INEEL began a comparison of alternative methods to accomplish the Stage II waste retrieval demonstration at OU 7-10. As a result of this comparison, the Glovebox Excavator Method approach was recommended as the Stage II path forward because it provides the best balance of schedule, cost, and risk of the options analyzed (INEEL 2001).

The OU 7-10 Glovebox Excavator Method relies on a commercial excavator with the cab and operator located outside a confinement structure. Gloveboxes house material handling and packaging operations, and an insulated fabric enclosure isolates the confinement structure and the gloveboxes from the outside environment.

The specific objectives for the OU 7-10 Glovebox Excavator Method Project are to:

- Demonstrate waste zone material retrieval
- Provide information on any contaminants of concern present in the underburden
- Characterize waste zone material for safe and compliant storage
- Package and store waste onsite, pending decision on final disposition.

Facilities associated with the OU 7-10 Project are located at OU 7-10 and surrounding areas. The OU 7-10 Project excavation area is defined by a 20-ft × 145-degree arc down to but not including the underburden. The Project will remove at least 75 yd³ of material from the waste zone in this arc and will sample the underburden. The excavation area was selected based on shipping records that indicate that this area contains high concentrations of volatile organic compounds and on recent probe data that indicate that one small portion of this area could contain a high concentration of TRU radionuclides.

1.7 Project Facility Overview

The project includes waste zone material excavation, sizing (when needed), sampling, packaging, assaying, and storage. Materials within the waste zone are placed primarily in 55-gal drums. A secondary capability exists for placing waste zone materials in 85-gal drums. The packaged material is then weighed, radioassayed, and placed into onsite CERCLA-compliant storage. The packaged material will then be stored onsite, pending decision on final disposition.

The project facilities include the Waste Management Facility-671 (WMF-671) Weather Enclosure Structure (WES) that houses the Facility Floor Structure (FFS), Retrieval Confinement Structure (RCS), a commercial excavator, and the Packaging Glovebox System (PGS) that comprises three gloveboxes attached to the RCS. Personnel support trailers, an assay system, and one or more CERCLA-compliant storage areas are next to the WMF-671 (see Figures 1-3 and 1-4).


The WMF-671 WES consists of a prefabricated steel frame with an insulated membrane that is tensioned over the frame to provide a tight-fitting shell. A structural floor placed over the ground provides a stable working surface for forklifts, personnel, and confinements. The WMF-671 WES provides vital support functions, such as operational lighting, localized radiant heating, life safety systems, fire detection and suppression, ventilation, and filtration of the exhaust air.

The RCS is constructed over the retrieval area and is a confinement for radiological and hazardous material releases during excavation and retrieval activities. The RCS is constructed of a steel ceiling, steel floor, and steel wall plates attached to a structural steel framework. The RCS is equipped with windows, sealed penetrations and interfaces, personnel vestibules, gloveports, an excavator confinement interface for operation of the excavation system, and a bank of high-efficiency particulate air (HEPA) filters that are inlets and outlets for the ventilation system.

The gloveboxes are constructed of a steel frame, stainless steel bottom, clear panels, gloveports with gloves, rail-mounted transfer carts, operator work platforms, and HEPA filter inlets for the ventilation system. Three packaging stations are included in each glovebox for loading waste into new drums. Each station is accessed through a port in bottom of the glovebox. The new drums and drum loadout ports and bag-out rings are within contamination control structures referred to as drum loadout enclosures.

The RWMC facilities located nearest to the project facilities are as follows:

- An OU 7-10 retrieval structure and rails, a process building, a chemical warehouse, and support facilities that were constructed during a Pit 9 Project by a previous contractor and then abandoned before use
- Activities being conducted at the SDA for removal of organic contamination in the vadose zone

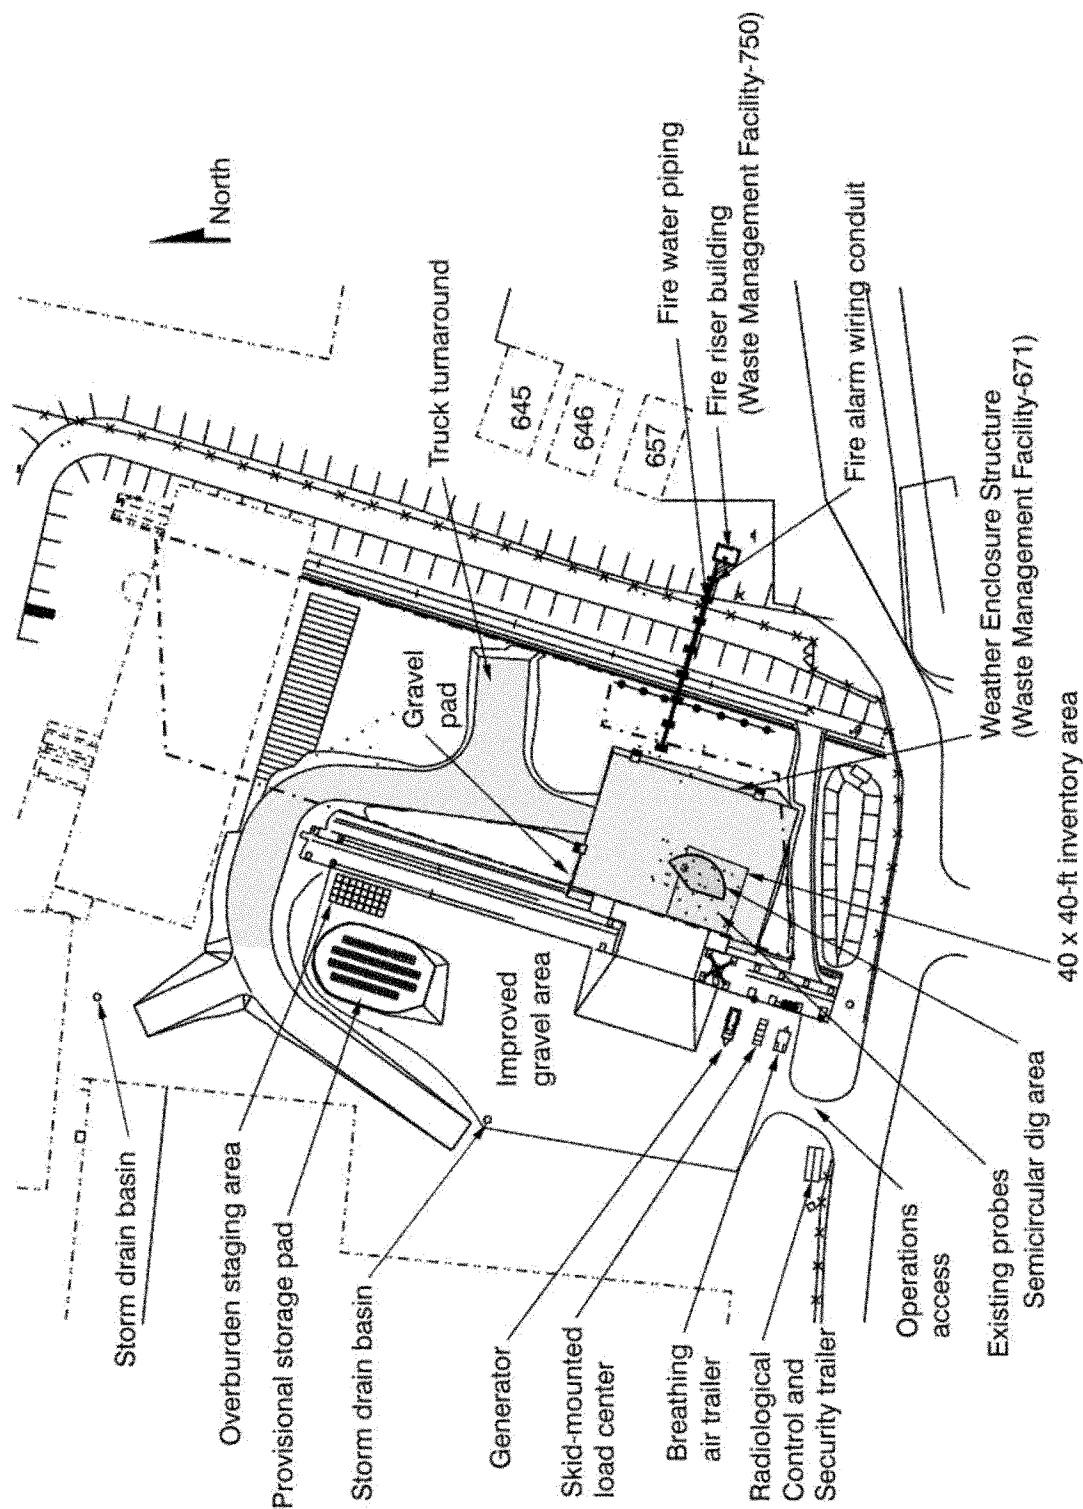

02-GA50598-02

Figure 1-3. Plan view of the Operable Unit 7-10 Glovebox Excavator Method Project area showing project site structures.

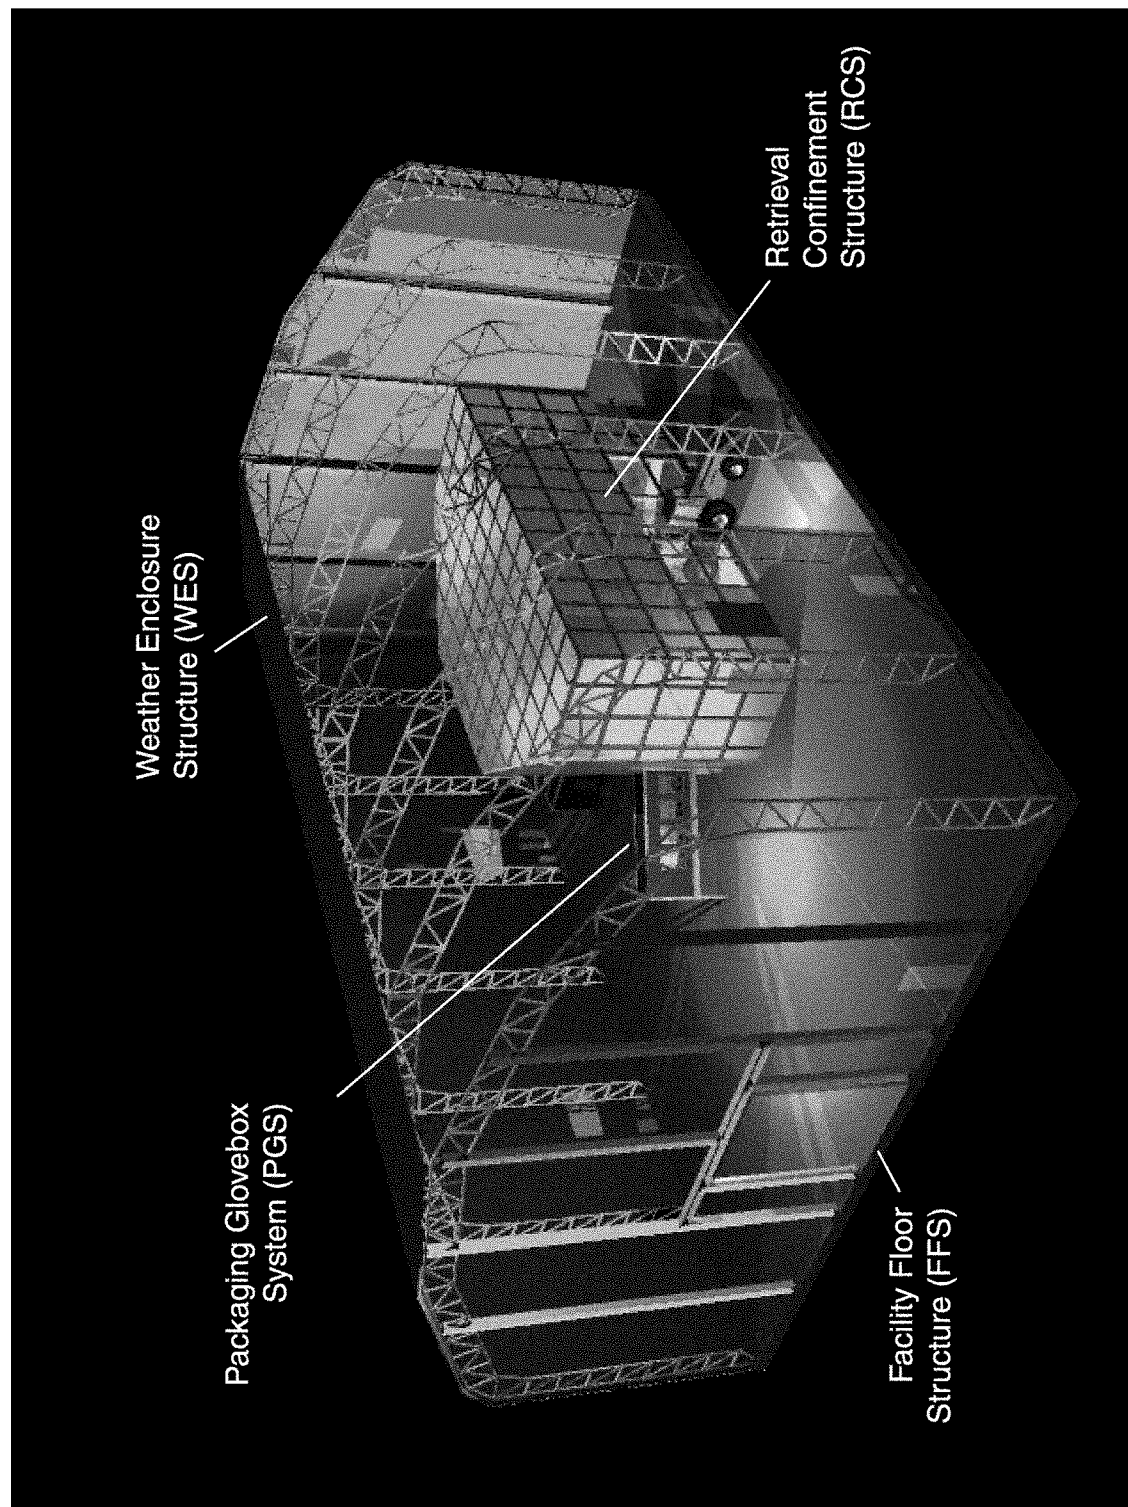


Figure 1-4. Waste Management Facility-671 Weather Enclosure Structure housing the Retrieval Confinement Structure and the Packaging Glovebox System.

- Active low-level waste pit at the SDA
- Heavy equipment storage shed (WMF-609)
- Construction and field support trailers (i.e., WMF-645, WMF-646, WMF-657)
- Radiation Control Field Office (WMF-601)
- RWMC highbay (WMF-602)
- Advanced Mixed Waste Treatment Facility.

Significant physical interfaces with RWMC systems include connection to the RWMC firewater supply, alarm, and electrical power systems.

1.8 Project Key Facility Components

Operational aspects of the OU 7-10 Project are described in the following sections. Each activity associated with OU 7-10 Project operations will incorporate hazard identification and mitigation measures and follow requirements of MCP-3562, “Hazard Identification, Analysis and Control of Operational Hazards,” or Standard (STD) -101, “Integrated Work Control Process.”

1.8.1 Weather Enclosure Structure

The WMF-671 WES is a commercially available enclosure measuring approximately 80 × 110 × 35 ft and is attached to the Facility Floor Structure. Figure 1-5 shows the WMF-671 WES facility layout. Operating personnel work within the WMF-671 WES during excavation and packaging operations. The WMF-671 WES consists of a prefabricated steel frame with an insulated membrane cover. The membrane is impregnated with flame resisting compounds. Although not considered equivalent to the fire-resistive characteristics of noncombustible materials, the WMF-671 WES achieves the fire protection objectives of the National Fire Protection Association (NFPA) 801, “Standard for Fire Protection for Facilities Handling Radioactive Materials,” (NFPA 1998) with no reliance on the fire resistive characteristics of its construction. Thus, it is concluded that this construction method is appropriate for the WMF-671 WES. DOE-ID has agreed with this design decision.^b

The WMF-671 WES provides vital support functions such as operational lighting, localized radiant heating, life safety systems, fire detection and suppression, ventilation, and filtration of the exhaust air. Fire protection for the WMF-671 WES is provided by an automatic dry-pipe sprinkler system plus detection and alarm systems.

For protection of the RCS and PGS, which are designated safety-significant, the WMF-671 WES is designed to meet performance criterion (PC) -2 wind-loading criteria identified in DOE-ID “Architectural Engineering Standards” (DOE-ID 2001). Meeting this criterion is bounding for seismic events. The WMF-671 WES also is designed with a structural framing to resist loading from snow, rain, and other weather-imposed loads. Lightning protection is provided on the outside of the WMF-671 WES and is designed to protect the facilities and personnel from the effects of a lightning strike.

1.8.2 Retrieval Confinement Structure

The RCS is a Nuclear Fuel Services, Inc.-Radiation Protection Systems, Inc. Perma-Con system manufactured by Kelly Klosure Systems interfaced with the excavator, FFS, and PGS. The Perma-Con

b. Jerry L. Lyle, DOE-ID, Memorandum to Mark W. Frei, INEEL, “Fire Protection Equivalency Request for OU 7-10 Glovebox Excavator Method,” January 10, 2002, DOE-ID-FPEQ-02-10.

system is a commercially available radiological confinement system constructed of stainless steel modular panels that lock together. Cross-members are provided within the panels to provide support for the steel panels. The structure is connected to the FFS and the three gloveboxes that makeup the PGS. Joints in the RCS are sealed with sealant and tape.

The RCS interface to the excavator is through inner and outer booted confinement assemblies. The inner boot assembly seals the boom pivot cylinder area and hydraulic hose opening area in the excavator frame. The outer assembly seals the excavator frame to the RCS. The inner assembly is a steel plate box constructed around the boom pivot cylinders and hydraulic hose opening. The inner assembly includes bulkhead fittings that interface to hydraulic hoses and an opening with a bolted steel plate to allow access to both sides of the bulkhead fittings. To seal the hydraulic hose opening, steel plates with hydraulic hose bulkhead fittings are welded to the excavator frame and boom pivot box. The outer booted confinement assembly is flexible to ensure seal integrity against small excavator movements and vibration, provides a barrier that shields the internal seal assembly from direct flame impingement, and is resistant to attack by waste zone materials. The outer boot consists of steel sheet welded to the outer excavator frame, steel angle, flat gasket material, Unistrut, fire shield, and commercial bulkhead connectors (see Figure 1-6).

The RCS viewing windows are made of Lexan. The viewing window in front of the operator's cab provides line of sight to portions of the excavation and the inside of the RCS. Lexan windows are combustible. By DOE-ID approval of an equivalency request, the use of Lexan windows in the RCS is appropriate for the project.^c

Closed-circuit television cameras located in the roof of the RCS and connected to a video monitor in the operator's cab provide views of the excavation that cannot be seen through the window. Lights located on the RCS aid in visibility.

Access to and exit from the RCS is through a stainless steel panel door located in the personnel access room or through the personnel emergency transfer vestibule near the exhaust HEPA filter bank. Gloveports and transfer ports are located in some RCS panels to allow equipment or material transfer and manual manipulation without entering the RCS. Equipment and material enters and exits the RCS through stainless steel panel double doors in the transfer vestibule. The access doors are self-sealing.

Cable, pipe, hose, and other penetrations through the RCS are sealed by a variety of methods to ensure there are no leaks to the WMF-671 WES or the personnel and transfer vestibules. Several of the penetrations allow a radiological control technician (RCT) to insert a probed instrument into the RCS for the purpose of performing air monitoring.

The passive confinement features of the RCS are safety-significant and are designed to meet PC-2 seismic-performance criteria identified in DOE-ID "Architectural Engineering Standards." The WMF-671 WES is designed for PC-2 wind performance criteria and protects the RCS from this and other events.

c. Jerry L. Lyle, DOE-ID, Memorandum to Miriam Taylor, INEEL, "Path Foreward for 10 CFR 830 Rule Requirements for Transportation at the INEEL," January 15, 2002, EM-AM-02-001.

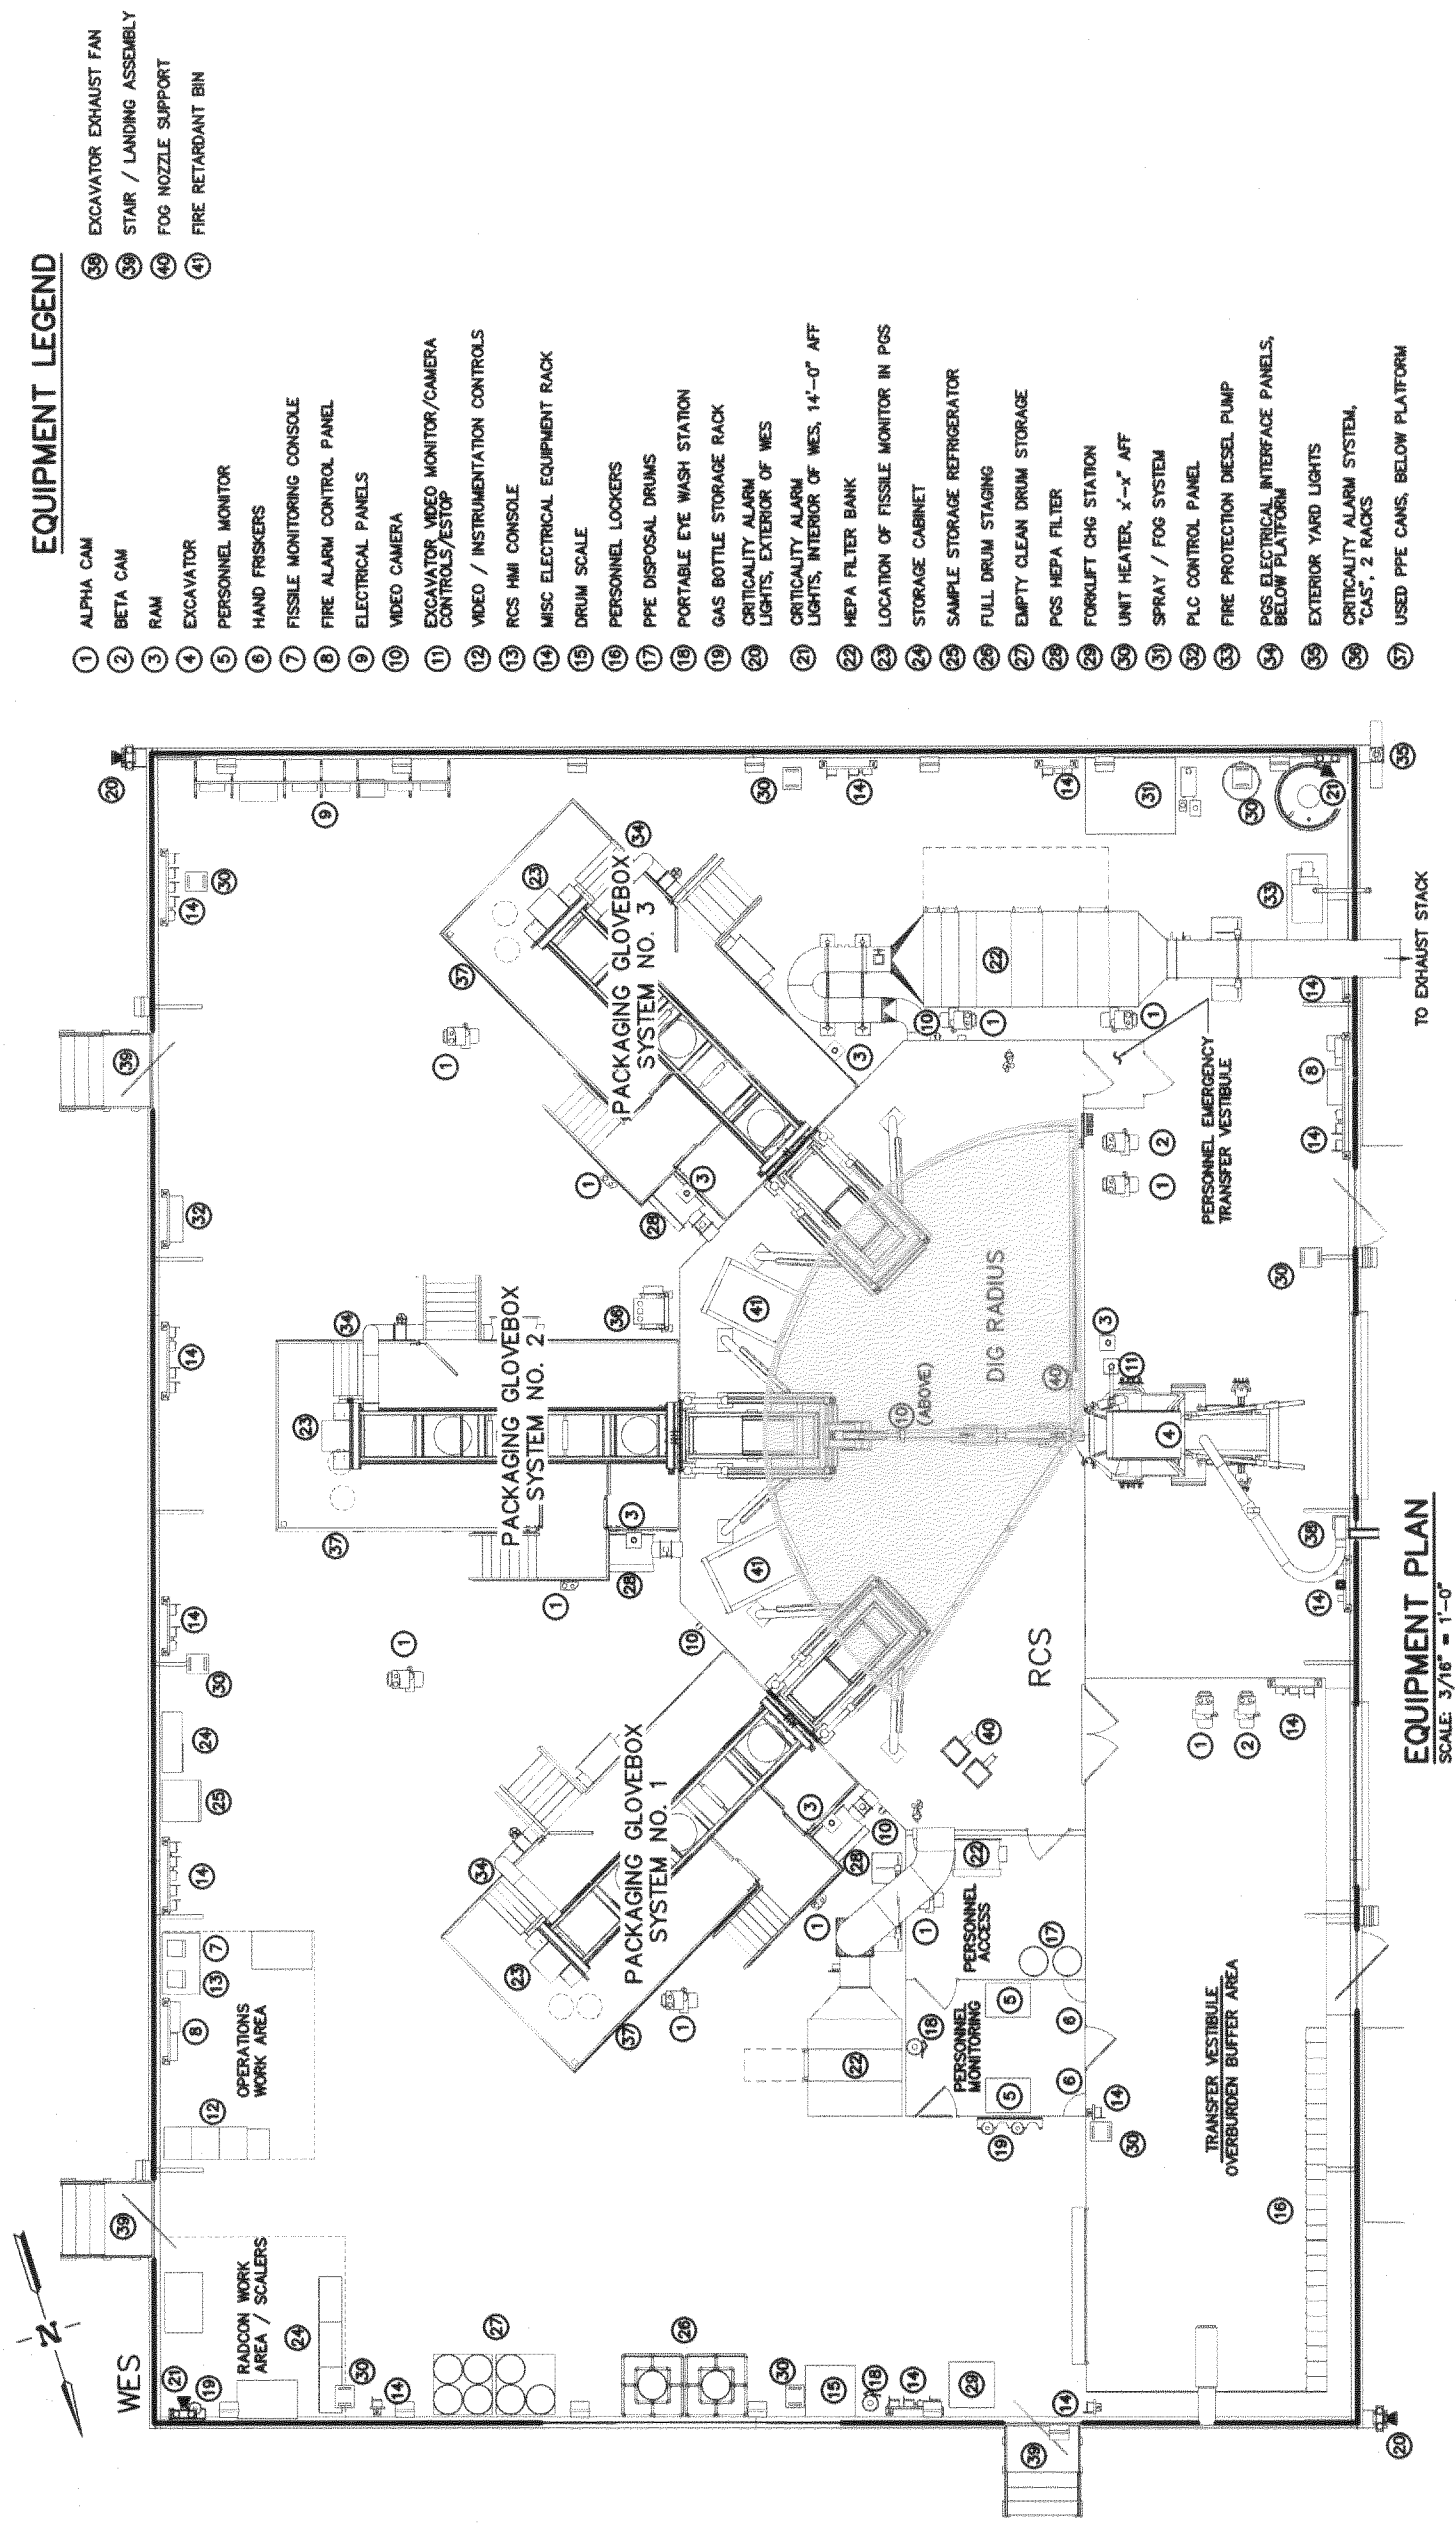


Figure 1-5. Drawing showing layout of individual gloveboxes for the Operable Unit 7-10 Glovebox Excavator Method Project inside Waste Management Facility-671 Weather Enclosure Structure.

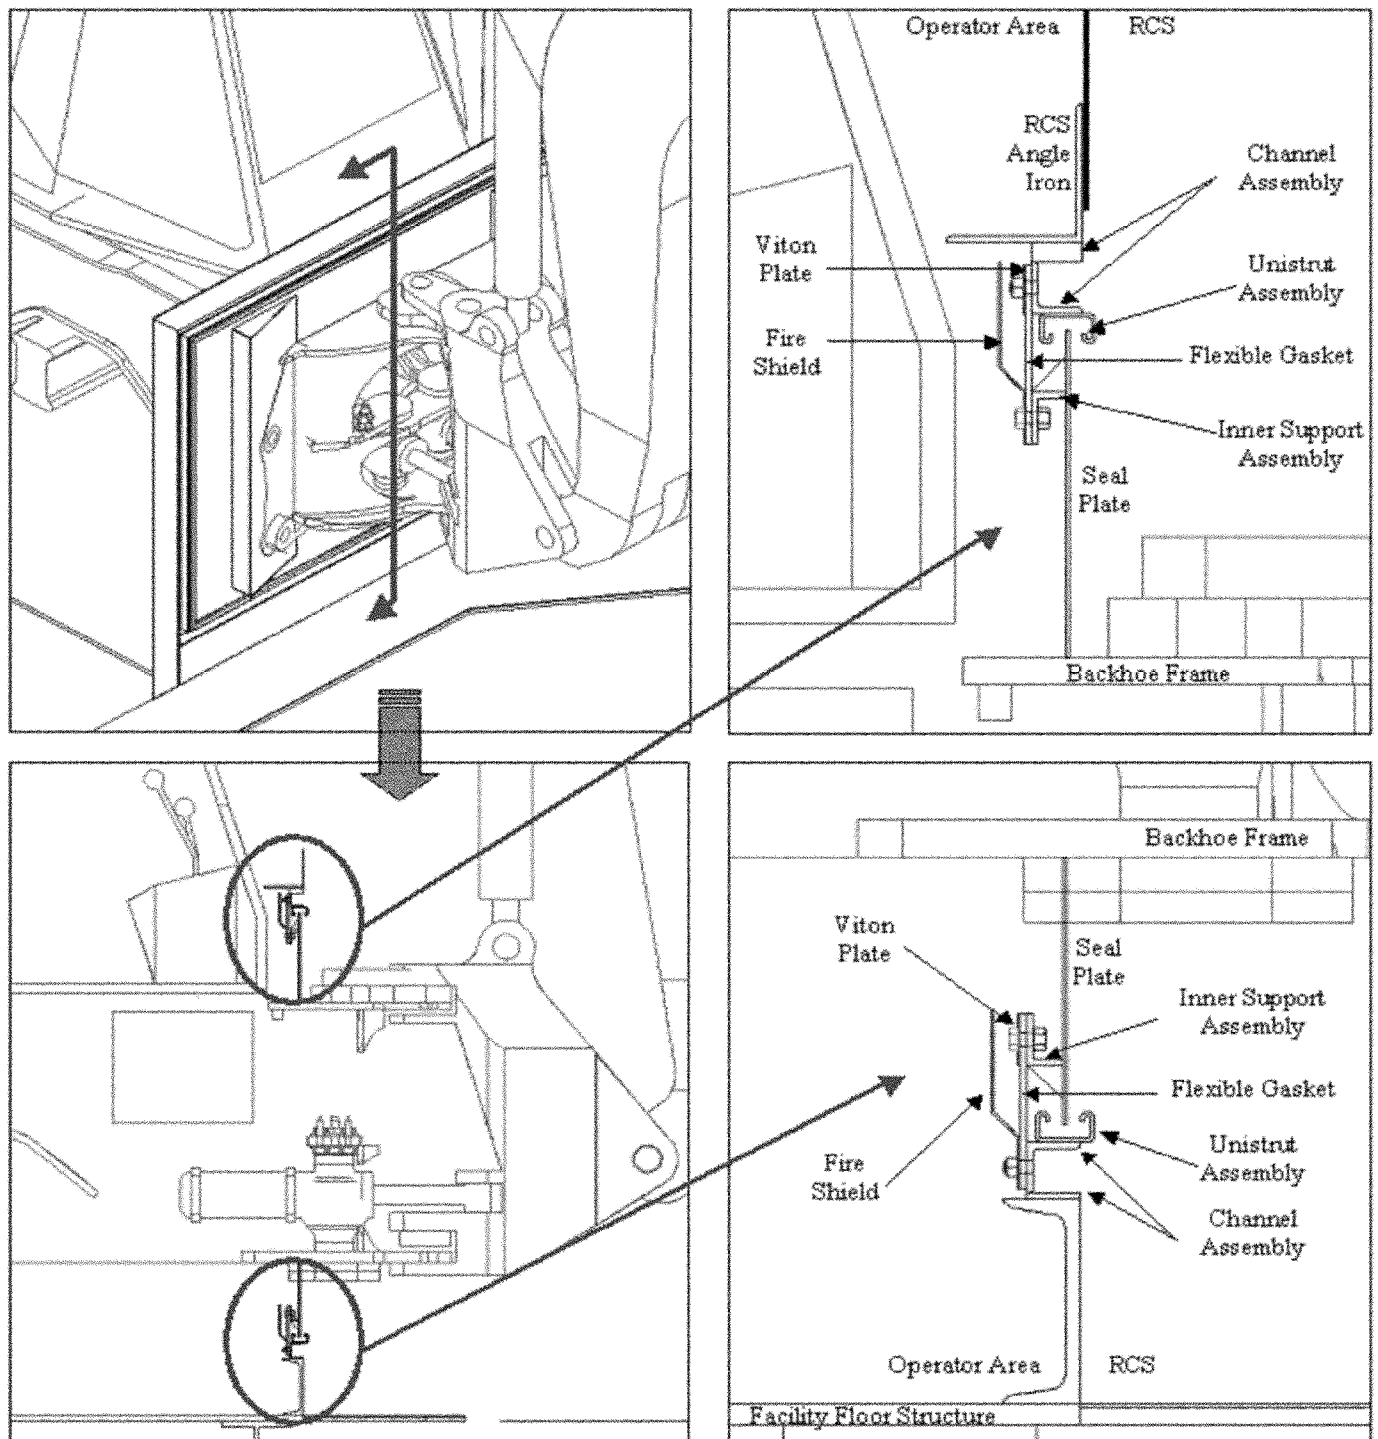


Figure 1-6. External excavator to the Retrieval Confinement Structure boot assembly.

1.8.3 Excavator

The excavator is a commercially available diesel engine backhoe loader that has been modified for the OU 7-10 Project to ensure contamination control and a stable confinement interface with the RCS. The tires, front-end loader bucket, bucket hydraulic cylinders, and outriggers are removed and the chassis is anchored to the FFS to prevent inadvertent motion. Physical stops are installed on the excavator to prevent contact of the end effectors with the RCS and RCS gloveports. Caps are seal welded on the RCS side of the stabilizer support frames and the lower mounting pins on stabilizers are welded closed to prevent contamination migration. Modifications to the excavator to provide the interface to the RCS are shown in Figure 1-6.

The excavator is controlled from inside the operator's cab, which is located at a window position outside the RCS to provide line-of-sight operations. Only the excavator arm extends into the RCS. The arm consists of a fixed-length boom, an extendable stick, and an end effector coupling controlled by the operator in the cab. The excavator can lift and move loads up to 1,000 lb from any boom and stick position in the pit. A hydraulic pressure-measuring line connected to a hydraulic cylinder on the excavator and connected to a visual pressure gauge in the operator's cab provides the operator with an indication of the load weight based on pressures produced in the cylinder. The video monitor in the operator's cab provides the operator with views of areas that cannot be seen in the line of sight. A fan and duct connected to the excavator engine exhaust pipe ventilates exhaust from the excavator to outside the WMF-671 WES.

The structures and attachments to the FFS that ensure the excavator is immobile are designed to meet PC-2 seismic-performance criteria identified in DOE-ID "Architectural Engineering Standards." This design feature ensures that the excavator does not pull away from the RCS during a seismic event.

1.8.4 Packaging Glovebox System

The PGS consists of three rectangular gloveboxes attached in fan fashion to the RCS. The glovebox ends at the RCS are open and are sealed to the RCS. A structural steel framework that is anchored to the FFS supports each glovebox. The panels, penetrations, interfaces, and ports are sealed and secured to the frame or panels to ensure confinement. The assemblies are suitable for the waste zone materials.

The side panels consist of lower sections and one upper section. The lower panels are a laminate of chemically hardened glass on the outsides of Lexan. The upper panels and ceiling are a laminated safety glass material. This combination of composite panels at the bottom and laminated safety glass panels at the top and ceiling provides for a noncombustible structure that is capable of maintaining confinement during impact stresses. The floor and one end of each glovebox are constructed of stainless steel panels connected to a steel framework. A laminated safety glass window is located in the end steel panel of each glovebox. Each glovebox has an inlet HEPA filter, manual damper, and inlet filter ducting.

The gloves are suitable for the waste zone materials. For some operations, an outer leather glove is placed over the inner glove to provide protection from glove punctures and cuts.

Rail-mounted primary and auxiliary steel transfer carts service each glovebox. The glovebox operators manually position the auxiliary carts. The primary transfer carts are motor controlled, and limit switches control the range of movement. Cabling for the limit switches is through bulkhead fittings in the gloveboxes. The primary cart motors are located outside the gloveboxes. Light beam access guards within each glovebox prevent movement of the primary cart when gloves are extended into the glovebox through

the oval gloveports. The primary transfer carts are about 7 in. (17.78 cm) deep, and each is capable of transporting about 3 ft³ of loose material or one intact drum.

Each glovebox has a rail-mounted electric chain hoist. For the purposes of inspection and maintenance of the hoists and rigging in the gloveboxes, the gloveboxes meet the definition of a hostile environment as defined by the DOE hoisting and rigging standard (DOE-STD-1090-01).

Each transfer cart is fitted with a custom-made liner. For lifting purposes, webbing is sewn to the underside of the liner with lift loops at the four corners. To lift a load out of the cart, the four lift loops are grouped together on the hoist hook.

Three drum loadout stations are included in each glovebox system. Each drum loadout station is accessed through a cover in the bottom of the glovebox. A funnel leads from each loadout station into the drum loadout enclosure. Clean drum transfer bags are used to maintain a contamination barrier between the glovebox and the drum loadout enclosure during drum loadouts. A drum liner is placed in the transfer bag and then the liner-bag assembly is placed in the drum. The open end of the bag is secured to the drum bag-out ring.

The passive confinement features of the PGS are safety-significant and are designed to meet PC-2 seismic-performance criteria identified in DOE-ID “Architectural Engineering Standards.” The WMF-671 WES is designed for PC-2 wind performance criteria and protects the PGS from this and other natural events.

1.8.5 Drum Loadout Enclosures

During drum loadouts, the bag-out ring and new drum transfer bags form the primary confinement for the loadout area. A drum loadout enclosure is located under each glovebox and forms a contamination control barrier. The enclosures are constructed of fire resistant fabric panels on all sides with clear polyvinyl chloride windows, sleeves, and zippered molded plastic doors and are supported by grommets in the panels and ties to steel pipe frames. Interfaces are to the glovebox bag-out rings, the Facility Floor Structure, and the filters and ductwork leading to the RCS. Untestable inlet HEPA filters are located on each enclosure. The enclosure exhaust connects to the RCS by ductwork, a manually controlled damper, a testable HEPA filter, and another manually controlled damper. Lift tables located in the loadout enclosures position and support drums during drum packaging.

1.8.6 Personnel Monitoring, Personnel Access, and Transfer Vestibules

The personnel monitoring, personnel access, and transfer vestibules are Kelly Klosures Perma-Con System type structures similar to the RCS. The personnel monitor vestibule contains monitoring equipment for controlling exits from the personnel access and transfer vestibules. The personnel access vestibule accommodates the donning and doffing of personal protective equipment (PPE) for access and egress from the RCS personnel access door. The transfer vestibule provides a transition between the outside of the WMF-671 WES and the interior process and personnel work areas. Full and empty drums, soil bags, transfer equipment, and personnel can move in and out of the transfer vestibule. Equipment doors allow access to the RCS from the transfer vestibule.

1.8.6.1 Facility Floor Structure. The FFS design includes the framing and flooring for the weather enclosure floor and the shoring box through the overburden. The floor structure covers about the same area as the WMF-671 WES. The FFS is designed to support and interface to the WMF-671 WES, RCS, PGS, excavator, and other structures and equipment within the WMF-671 WES.

The main framing consists of structural steel, wide-flange shapes. The wide flanges rest on the ground surface and are designed to span at least 24 ft between support locations to provide support if a pit subsidence occurs. The floor is metal decking topped with a plate that has a nonskid surface. Areas with high loads, such as the excavator support area, use a plate that is thicker than in other areas of the WMF-671 WES.

The floor is the working surface for personnel and supports small forklifts, pallet trucks, and other movable equipment and instrumentation. Design loads include personnel, equipment, other structures, wind, and earthquake.

The shoring box is a steel structure similar in design to trench boxes commonly used for construction excavation, the main differences being the shape and size of the box. The box provides the perimeter for the arc-shaped excavation area. The box is made from structural steel tubing and steel plate and forms walls 3.5 ft down into the overburden. Excavation deeper than the shoring box establishes an angle of repose to eliminate large sloughing events that could undermine the FFS. Installation involved excavation of a 3.5-ft deep trench around the perimeter of the retrieval area, installation of the metal shoring box in the trench, and backfilling the trench.

No reliance is placed on the FFS for the control of contaminated firewater. Any contaminated water that escapes the excavation area or other portions of the WMF-671 WES will be confined to the OU 7-10 surfaces external to the WMF-671 WES and the storm water catch basin located to the south of OU 7-10. By DOE-ID approval of an equivalency request, this contamination control method is considered appropriate for the OU 7-10 Project (see Footnote B).

The FFS within the RSC is safety-significant and is designed to meet PC-2 seismic-performance criteria identified in DOE-ID “Architectural Engineering Standards.” The WMF-671 WES is designed for PC-2 wind performance criteria and protects the FFS from this hazard.

1.8.7 Interim Storage Pad

The interim storage pad is an open gravel pad used for the interim storage of waste coming from the PGS. Onsite storage will be required pending a decision on final disposition or shipment to the INEEL CERCLA Disposal Facility (ICDF). An optional staging area that may be used is the overburden staging area.

Toxic Substances Control Act (15 USC § 2601 et seq., 1976) and RCRA cargo containers may be used for interim storage of Toxic Substances Control Act and RCRA waste coming from the PGS. Onsite storage or possibly WMF-628 will be required pending a decision on final disposition or shipment to the ICDF.

1.8.8 Comprehensive Environmental Response, Compensation, and Liability Act—Compliant Storage

Onsite storage of newly packaged waste materials may occur primarily in WMF-628, which is RCRA-permitted storage building at the RWMC or in commercially available satellite storage units. Storage in WMF-628 is addressed in the main body of the RWMC safety analysis report. The portable units are Factory Mutual approved steel structures specifically designed as satellite storage stations. They are accessible by forklift and other material handling equipment and are vented and liquid tight for spill confinement.

1.8.9 Overburden Staging Area

The overburden staging area is an open gravel pad located outside of the OU 7-10 boundary used to stage the bagged overburden soil until pit closure activities or optional transfer to ICDF or other acceptable disposal locations. The overburden staging area also may be used to stage waste containers after packaging.

1.8.10 Fire Riser Building

The fire riser building is a small heated, metal structure with a concrete floor. This structure contains the fire riser tie-in to RWMC services that supply the fire suppression systems for the WMF-671 WES and RCS and an air compressor for maintaining air pressure in the dry-pipe systems.

1.8.11 Radioassay Facility

Drums containing newly packaged waste zone materials are assayed before storage to ensure that the fissile material loading is ≤ 380 g fissile gram equivalent (FGE). The project has opted to use a commercially available trailer-mounted assay system. The trailer system would be located near the project interim storage pad. The trailer is equipped with an office and the detection unit.

1.8.12 Radiological Control and Security Trailer

The Radiological Control and Security Trailer is a commercially available structure set up at the project site. The trailer will contain essential radiological control equipment, such as portable self-monitoring instruments, portable radiation detection instruments, and contamination count-rate instruments. The trailer also will have a small portable glovebox counting potentially highly contaminated swipes from the RCS and PGS. The glovebox is needed for contamination control while performing the smear counts. The glovebox is ventilated with a HEPA filtration system, is constructed of stainless steel and Lexan, has a french can transfer port, and has a standard bag-in bag-out transfer port. All waste generated in the swipe counting glovebox will be returned to the PGS by way of the french can system.

1.9 Project Operations and Processes

This subsection describes the activities and decisions relating to the OU 7-10 Project waste-material retrieval and handling process. It is expected that retrieval and packaging can be accomplished over a period of less than 3 months. The facilities then will be placed in a shutdown and lay-up condition and deactivation, decontamination, and decommissioning (D&D&D) will be performed.

1.9.1 Overburden Removal

The overburden is removed from within the shoring box by the excavator working through the RCS wall and workers working inside the RCS. Steel and Lexan probes were inserted to various depths in the excavation area during Stage I of the OU 7-10 Project. Workers with hand tools are required for overburden removal around some of these probes. Monitoring will be performed in the RCS and workers in the RCS will wear PPE as required by the RCT, the safety professional, and the industrial hygienist (IH). The dust suppression system or hand operated portable spray units are used to keep the dust down and reduce the potential for contamination spread.

Excavated soils are placed in commercially available soil sacks. Before removal from the RCS, the soil sacks are closed by workers and are monitored by an RCT for contamination. After monitoring and decontamination, if required, the soil sacks are moved by material handling equipment from the RCS to

the transfer vestibule where they are checked again for contamination. The sacks may be staged in the transfer vestibule pending movement to the overburden staging area pending disposal or reuse in the excavation.

1.9.2 Waste Zone Material Removal

The waste zone material, which includes interstitial soils, waste materials, and container remnants, is excavated by the excavator. The excavator operator maintains an angle of repose on the sides of the excavation to ensure that large sloughing events do not occur. Operators outside the RCS activate the dust-suppression system (DSS) as needed to control airborne dust. The DSS in conjunction with the ventilation system ensures that airborne contamination levels are controlled.

By design, the RCS and PGS are passive confinement systems. That is, on a loss of ventilation, contamination spread into the WMF-671 WES is not expected. However, as a precaution during loss of ventilation events, the excavator operator will return the controls to their neutral conditions, turn off the excavator engine, and leave the area with the glovebox operators and others in the WMF-671 WES. These precautions ensure that the excavator does not become a potential source of contamination spread outside the WMF-671 WES through the engine and exhaust, that the excavator air intake does not produce a negative pressure condition in the WMF-671 WES relative to the RCS and PGS, and that the operators in the WMF-671 WES do not become potential exposure targets during a loss of ventilation. Personnel will be allowed back in the WMF-671 WES when ventilation is restored and a reentry survey by the RCT indicates it is safe with concurrence from the industrial hygienist. The RCT is directed by company procedures that specifically address loss of contamination incidents if a loss of contamination occurs. These precautions ensure that the excavator does not become a potential source of contamination spread outside the WMF-671 WES through the engine and exhaust, that the excavator air intake does not produce a negative pressure condition in the WMF-671 WES relative to the RCS and PGS, and that the operators in the WMF-671 WES are not potential exposure targets during a loss of ventilation.

Refueling of the excavator is from a portable fuel container that is brought into the WMF-671 WES. Fuel is pumped by hand from the container to the fuel tank. The container is then removed from the WMF-671 WES. Drip pans are installed beneath the fuel tank and hydraulic reservoir to contain spilled or leaking fluids.

The dominant waste forms that will be encountered in the waste zone have been assessed based on an evaluation of shipping records for waste placed in a 12.2×12.2 -m (40×40 -ft) area, also referred to as the Stage I area, around and near the smaller excavation area addressed by this safety analysis. The results of this assessment are shown in RWT-01-99.^d The dominant waste form is drums of Series 743 sludge^e containing organics such as cutting oils and carbon tetrachloride (CCl_4). The next significant types of waste are drums containing contaminated combustible materials. Of lesser number are drums of evaporated salts (nitrates) and drums of graphite material (believed to be crushed molds).

The project is not required to remove all materials from the waste zone. Some of the steel and Lexan probes inserted during Stage I are relocated with the excavator and placed in other areas of the excavation. Unexpected materials such as compressed gas cylinders, containers of nonradiological

d. W. Thomas Roderick, INEEL, Interdepartmental Communication to David E. Wilkins, INEEL, "Waste Contents Associated with OU 7-10 Stages I/II Activities in Pit 9," April 16, 1999.

e. The waste is called Series 743 sludge because it was processed into sludge in the Rocky Flats Plant (RFP) Building 774 and was later coded at the Idaho National Engineering and Environmental Laboratory (INEEL) as Content Code 3 organic waste to distinguish it from other types of waste from RFP Building 774 that were shipped to the INEEL.

materials that are pyrophoric (such as zirconium), laboratory generated waste (i.e., multiple containers of lab waste consolidated in a drum), and containerized unknowns may be left in place. Before removal from the excavation, a nonsparking tool attached to the excavator will puncture intact drums. The weight of waste zone materials is expected to be well within the handling limits of the excavator. Unexpected materials that could exceed the excavator design handling weight of 1,000 lb (454 kg) and that cannot be sized with the excavator to less than 1,000 lb (454 kg) are not removed from the excavation. Intact drums that may exceed the glovebox design basis drop weight of 350 lb (159 kg) and that cannot be sized with the excavator to less than 350 lb (159 kg) are not processed through the gloveboxes. Materials weighing less than these design-basis weights but that cannot be sized to fit in a 55- or 85-gal drum are not processed through the gloveboxes. The excavator operator, using readings from a pressure indicator, checks the weight of materials during lifts. Sizing of materials can take place in a drum-sizing tray when needed. The design dimensions of the drum-sizing tray prevent the accumulation of free liquids to a depth greater than 8 in. (approximately 10 L). The 2.6-gal limit is based on the criticality safety evaluation.

To ensure adequate radiation protection of the glovebox operators, each bucket and cart of waste zone material is monitored by an RCT located outside the confinement. Temporary shielding or special handling procedures may be required for waste zone materials with high radiation readings or the material may be returned to the excavation.

Lead shielding material or aerosol cans are not expected in the excavation area but may be encountered. These materials present an insignificant hazard and can be safely excavated and handled through the RCS and PGS.

After monitoring by the RCT, the excavator operator empties the bucket of waste zone materials in a transfer cart. The transfer cart is moved on rails by a drive system controlled by a glovebox operator.

If more than 2.6 gal (10 L) of free liquids (i.e., liquids that are visible and uncontained) at a liquid depth greater than 2.6 in. are observed in the retrieval area, operations in that area temporarily stop until an absorbent is added to the liquid. Operations can continue once the absorbent is added. The absorbent is a commercially available product that has been prestaged within the RCS. The excavator is used to apply the absorbent when needed. If simple absorption will not be effective based on the liquid observed or if absorption is not effective, work will stop and special-case handling procedures will be developed.

1.9.3 Packaging Glovebox System Operation

Glovebox system operation consists of monitoring and visual screening of waste, waste zone material sampling, packaging waste zone material, and sampling the underburden soils. Each of these is discussed in the following sections.

1.9.3.1 Monitoring and Visual Screening. Each cart of waste zone material is surveyed by an RCT. Temporary shielding or special handling procedures may be required for waste zone materials with high radiation readings or the material may be returned to the excavation. Monitoring and visual screening of waste zone materials are performed in the PGS by the glovebox operators. Hand tools are used by the operators to investigate the waste zone material to identify materials requiring special handling, to ensure that the receiving Treatment, Storage, and Disposal Facility (TSDF) waste acceptance criteria (WAC) is met, and to identify unexpected materials that may require special handling procedures or additional safety analysis. There could be small amounts of polychlorinated biphenyls (PCBs) in some sludge. Waste material contaminated with PCBs is prohibited by the receiving TSDF WAC. Drums of PCB-contaminated waste zone material will require storage in cargo containers located near the WMF-671 WES until final disposition is determined. Each PGS is equipped with a fissile material monitor (FMM), which contains an Eu-152 radioactive source. The sources are contained inside the FMM during

normal operations. Source-handling processes (i.e., source installation and removal) require special radiological controls that will be implemented through a radiological work permit (RWP). Some waste types will require fissile monitoring to ensure the receiving TSDF WAC of 200 g fissile material is met while others will not (Sentieri 2003). Waste types requiring fissile monitoring are listed below:

- Intact HEPA filters.
- High-efficiency particulate air filter media.
- Material not distinguishable from HEPA filter media.
- Intact graphite molds and large chunks of graphite molds (i.e., pieces greater than 2 in. in diameter).
- Other containerized unknown waste materials with the potential of having unsafe plutonium masses.

These waste types may not undergo fissile monitoring if new data become available that indicate that the actual drum loadings are less than 200 g.

The materials to be monitored will be placed in a specimen container. The volume of the FMM specimen container is limited to no more than 5.5 gal. This container is then placed into the shielded monitoring station. The detectors are mounted outside the gloveboxes. Fissile monitoring is accomplished through a window.

Waste types not requiring fissile monitoring are as follows:

- Sludge
- Soils
- Drum remnants
- Personal protective equipment
- Plastic materials used in contamination control
- Materials that through process knowledge are known to not contain high concentrations of fissile material.

1.9.3.2 Waste Zone Material Sampling. The details about sample data quality objectives, sample location and frequency, sample designation, sampling equipment and procedures, sample handling and analysis, and sample waste management are found in the *Field Sampling Plan for the OU 7-10 Glovebox Excavator Method Project* (Salomon et al. 2003). The purpose of sampling is to characterize a portion of the retrieved waste zone material to satisfy the receiving TSDF WAC and to support safe and compliant storage. During retrieval activities, rudimentary classification of the waste zone materials is conducted. This classification will classify waste zone materials as soils and gravel and debris waste. It is expected that the predominant waste stream will be soils and gravel. The soils and gravel are considered a single waste stream and will be sampled by way of a composite sampling scheme wherein the contents of every drum will be represented. Within the soil and gravel designation, there are three subpopulations. The first is a possible nitrate bearing waste that will be sampled and undergo analysis to determine if it is reactive

or ignitable (i.e., oxidizer) in accordance with RCRA. Visual screening will be used to identify suspect nitrate concentrations that require biased sampling of the waste zone material. The second is uncontainerized liquids that will be analyzed for PCBs. The third is pellets potentially containing cyanides (potassium or sodium cyanide). Physical samples of debris waste are not required.

| Samples not described by the *Field Sampling Plan* may be required (Salomon et al. 2003). If warranted by the situation, additional samples may be collected using the framework of the field sample plan. Authorization to proceed with the collection and analysis of unplanned samples will be determined by management.

Samples are collected in sample containers located within the PGS. The sample container is passed through the transfer port into a french can. The french can is a commercially available double door transfer system that ensures confinement of contamination on the sample containers. The french cans may be temporarily stored in a refrigerator located in the WMF-671 WES until they can be transported onsite to Idaho Nuclear Technology and Engineering Center at the INEEL for analysis. A transport plan is prepared for the shipments. The transport plans and the DOE-ID Transportation Safety Document ensure compliance with the safety analysis requirements of 10 CFR 830 Subpart B for transportation (see Footnote C). The residual sample materials are returned in a french can and removed from the can at a transfer port in the PGS. The residual sample materials are placed in new waste drums along with other waste zone materials during the waste zone material packaging process.

1.9.3.3 Packaging Waste Zone Material. Most of the packaging is in 55- or 85-gal drums. Sealable bags, referred to as special case bags, may be used to contain items such as bottles of liquid or other unexpected items. When necessary, the waste zone materials are sized in the glovebox using hand tools. Hold down straps can be attached to the transfer cart to secure waste zone materials during sizing if needed to ensure worker safety. A new drum liner is placed inside the drum transfer bag and the liner and bag assembly is placed in the new drum. The drum is positioned in the drum loadout enclosure on a lift table under a drum loadout port. The drum is raised on the lift table to under the drum loadout port. The open end of the transfer bag is secured to the loadout port with the bag-out ring. The glovebox operator removes the drum loadout cover in the glovebox and moves waste materials through the loadout port. The loadout port cover is closed, and the transfer bag is closed and becomes a part of the waste stream. The drum lid with filtered vents previously installed is secured, and the drums are surveyed while in the drum loadout enclosure. Drums are moved to a staging area within the WMF-671 WES or to the interim storage pad, pending assaying. The WMF-671 WES staging area is located spatially away from the excavator and fueling equipment as a fire protection feature.

| Fissile monitoring does not constitute an assay. Drums that have been assayed and confirmed to meet the storage WAC can be safely stored in any configuration.

| The newly packaged waste drums have bar code labels. These labels are recorded, and the bar code label identification number is recorded along with a description of the container contents. The weight of the container may be recorded in an operational log.

Drums can be returned for repackaging if the assay results indicate the container is greater than 200 g FGE but \leq 380 g FGE. Repackaging involves placing the drum in an 85-gal drum, attaching the drum using the transfer bag and bag-out ring, and using the hoist to pull the overloaded drum into the glovebox for repackaging or removing by hand or the hoist individual liners or bags from the drum. If any new drum contains more than 380 g (13.4 oz) FGE, the drum will be handled in accordance with the applicable technical safety requirements.

1.9.3.4 Sampling the Underburden. A collection device attached to the excavator arm is used to gather core samples of the underburden. The samples are placed in containers in the RCS or PGS and then passed through transfer ports.

The details regarding sample data quality objects, sample location and frequency, sample designation, sampling equipment and procedures, sample handling and analysis, and sample waste management are found in the *Field Sampling Plan* (Salomon et al. 2003). The objectives of the underburden sampling are to determine the presence and migration of the contaminants of concern as documented in the 1993 OU 7-10 ROD (DOE-ID 1993). Visual examinations will be performed of the excavation bottom to identify underburden sample locations.

1.9.4 Postretrieval and Packaging Operations

Operations after underburden sampling are characterized as post retrieval and packaging. These operations are discussed in the following sections.

1.9.4.1 Facility Shutdown. At the conclusion of waste retrieval and underburden sampling operations, the OU 7-10 Project will perform facility shutdown activities to place the excavation and facility into a safe, known, and stable condition where it will remain in lay-up until D&D operations begin. Figure 1-7 shows the four major functions associated with facility shutdown.

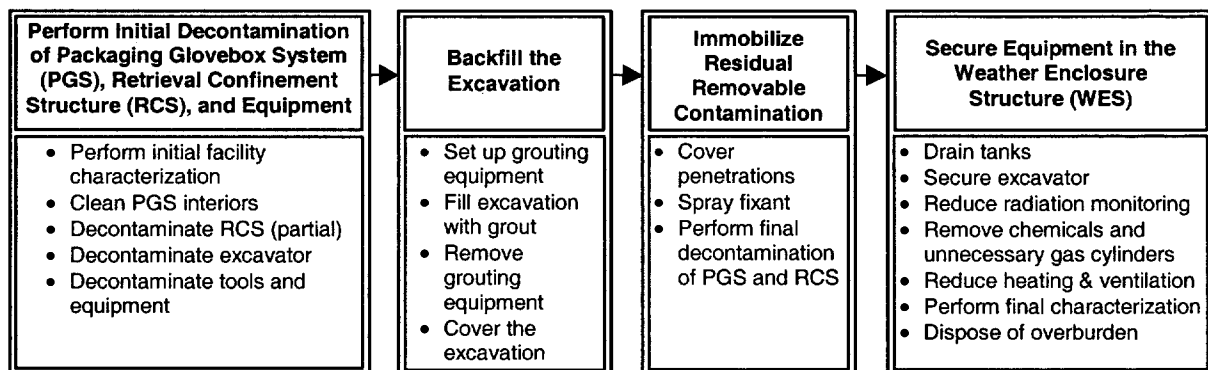


Figure 1-7. Four major functions associated with the Operable Unit 7-10 Glovebox Excavator Method Project facility shutdown process.

A summary of conditions expected after facility shutdown and to be monitored and maintained during the lay-up period is listed below:

- **Stage I investigation probes:** The radiological contamination on exposed surfaces of any remaining vertical probes has been immobilized. The probes that were pulled during excavation have been laid on the sides of the excavation area and covered by grout. All probes are closed on both ends and are empty inside.
- **Pit and shoring box:** The pit has been filled with a weak grout. Remaining contamination on the exposed portions of the shoring box is immobilized.
- **Equipment inside the RCS and the PGS:** Waste, grease, and loose dirt have been removed from the larger equipment inside the RCS and PGS and the equipment pieces are wrapped in plastic. Tools and other small items have been bagged out of the RCS and PGS for disposal.

- **Contamination on inside surfaces of RCS and the PGS glovebox skins:** All waste zone material has been removed from surfaces of the RCS and PGS. Gloves have been removed and gloveports and sample ports have been covered and sealed. The windows of the RCS and PGS have been decontaminated and left uncovered. The remaining surfaces are covered in strippable paint.
- **Heating and ventilation systems:** The heating and ventilation systems are left operating, but airflow may be reduced on the ventilation system. Airflow and negative differential pressure levels will be determined based on actual facility conditions by RadCon personnel to ensure continued confinement of radioactive contamination.
- **Fire detection and suppression systems:** The dry-pipe fire detection and suppression system in the RCS is operational. The RCS deluge, RCS carbon monoxide monitoring, and PGS fire suppression systems have been removed from service.
- **Excavator:** The excavator has been left operable and in place. Grease, loose dirt, and loose waste have been removed from the excavator arm and the arm will be in a resting position. The arm has been coated with strippable paint and wrapped in plastic sheeting. Any leaking hydraulic fluid found from the excavator outside of the RCS has been cleaned, monitored for radiation, and the leaking area covered with clear plastic. The hydraulic system has been flushed, the fuel has been drained, and the battery disconnected.
- **Compressed air tanks:** The breathing air and plant air receiver tanks have been depressurized.
- **Water tanks:** Water has been removed from the DSS and the PGS fire suppression system. The tanks are expected to be free of contamination. The valves at the RCS wall have been shut to close the potential path for contamination to the piping and water tanks.
- **Radiological monitoring:** Constant air monitors (CAMs), RAMs, personal contamination monitors (PCMs), and hand friskers remain operational although possibly reduced in number. The glovebox FMMs and the criticality alarm system have been removed from service.
- **Weather enclosure structure equipment:** All other equipment in the WMF-671 WES has been left in place but may be unplugged from power.
- **Overburden:** Sacks of overburden from retrieval operations have been sent to the ICDF or RWMC low-level waste pit or will have been used in overburden replacement.
- **Portable support equipment:** Most of the portable support equipment trailers remain in place at the OU 7-10 Project site to support D&D&D operations.
- **Assay trailer:** If used, the assay trailer is disconnected and removed from the site.

1.9.4.2 Facility Lay-Up Phase. The facility lay-up phase immediately follows facility shutdown. The duration of this phase will be kept to a minimum by initiating preparations for D&D&D in parallel with other activities. However, the facility has been designed such that this phase could be safely maintained for up to 1 year. The scope of activities performed within the facility during the lay-up phase includes surveillances, monitoring, and facility and equipment maintenance. Examples include routine RadCon surveillances to ensure continued confinement and control of radioactive contamination, monitoring of radiation and airborne contamination, monitoring of environmental emissions, and periodic maintenance of active and deactivated equipment. Preparations for the D&D&D phase are initiated.

The facility is expected to be in the same condition just before D&D&D as the facility lay-up phase. Should an unexpected radiological condition or equipment failure have occurred during lay-up, additional decontamination or equipment maintenance may have been performed.

1.9.4.3 Facility Deactivation, Decontamination, and Dismantlement Phase. The facility D&D&D phase will primarily involve deactivation and dismantlement of the OU 7-10 Project facility with site restoration of the OU 7-10 surface and associated OU 7-10 Project work areas. Debris treatment, excess equipment disposition, material transportation, and waste disposal also will be performed during the D&D&D phase.

Before D&D&D, the OU 7-10 Project team will perform a walk-down of the facilities and equipment with OU 7-10 Project engineering and RadCon personnel to ensure familiarization of the physical configuration for the shutdown phase. Work orders will be prepared to remove lockout and tagout (LO/TO) locks tags from equipment that will be used during the D&D&D phase.

1.10 Program Interfaces

| The OU 7-10 Project is being conducted under the regulatory authority of CERCLA, the OU 7-10 ROD (DOE-ID 1993), and the Explanation of Significant Differences to the OU 7-10 ROD (DOE-ID 1998).

| This project operates as a facility under the purview of the RWMC operations director. Project operations will be conducted in accordance with the project addendum to the RWMC safety analysis report, this HASP, interface agreement(s), and project operating procedures (standard and detailed).