

Health and Safety Plan for OU 7-10 Glovebox Excavator Method Project Operations

Bruce P. Miller October 2003

Idaho National Engineering and Environmental Laboratory Bechtel BWXT Idaho, LLC

Health and Safety Plan for OU 7-10 Glovebox Excavator Method Project Operations

Bruce P. Miller

Vortex Enterprises, Inc. Idaho Falls, Idaho

October 2003

Idaho National Engineering and Environmental Laboratory
Idaho Completion Project
Idaho Falls, Idaho 83415

Prepared under Subcontract No. 00000133-0001 for the U.S. Department of Energy Assistant Secretary for Environmental Management Under DOE Idaho Operations Office Contract DE-AC07-99ID13727

Health and Safety Plan for OU 7-10 Glovebox Excavator **Method Project Operations**

INEEL/EXT-02-01117 **Revision 5**

Joseph E. Uptergrow, Bechtel BWXT Idaho, LLC Operable Unit 7-10 Glovebox Excavator Method

Project Nuclear Facility Manager

Michael B. Pratt, Bechtel BWXT Idaho, LLC Operable Unit 7-10 Glovebox Excavator Method

Project Manager

Approved by

ABSTRACT

This health and safety plan establishes the procedures and requirements used to eliminate or minimize health and safety risks to personnel performing operational tasks within the Operable Unit 7-10 Glovebox Excavation Method Project operational areas at the Subsurface Disposal Area of the Radioactive Waste Management Complex. The Operable Unit 7-10 Project is part of the Idaho Completion Project at the Idaho National Engineering and Environmental Laboratory. This plan has been prepared to meet Occupational Safety and Health Administration standard, 29 *Code of Federal Regulations* 1910.120(2002), "Hazardous Waste Operations and Emergency Response Requirements."

This plan contains the assessment and associated mitigation of safety, health, and radiological hazards for conducting operational activities within the Operable Unit 7-10 Project operations area. Safety, health, and radiological professionals assigned to support Operable Unit 7-10 Project operations will define the most appropriate hazard control and mitigation measures based on operations-specific conditions and will make changes to this plan and associated work control documents as appropriate.

CONTENTS

ABS	TRAC	Γ		. 1111	
ACR	ONYM	IS		xiii	
1.	WORK SCOPE				
	1.1	Purpose		1-1	
	1.2	Applica	bility and Jurisdiction	1-1	
	1.3	Site Des	scription of the Idaho National Engineering and Environmental Laboratory	1- 1	
	1.4	History		1-3	
	1.5	Backgro	ound and Description of the Radioactive Waste Management Complex	1-3	
	1.6	1.6 Background and Description of the Operable Unit 7-10 Glovebox Excavator Method Project			
	1.7	Project l	Facility Overview	1-6	
	1.8	Project 1	Key Facility Components	1-9	
	1.0	1.8.1 1.8.2 1.8.3 1.8.4 1.8.5 1.8.6 1.8.7 1.8.8 1.8.9 1.8.10 1.8.11 1.8.12	Weather Enclosure Structure Retrieval Confinement Structure Excavator Packaging Glovebox System Drum Loadout Enclosures Personnel Monitoring, Personnel Access, and Transfer Vestibules Interim Storage Pad Comprehensive Environmental Response, Compensation, and Liability Act-Compliant Storage Overburden Staging Area Fire Riser Building Radioassay Facility Radiological Control and Security Trailer	1-9 1-13 1-14 1-15 1-15 1-16 1-16 1-16 1-16	
	1.9	1.9.1 1.9.2 1.9.3 1.9.4 1.9.5	Operations and Processes Overburden Sampling	1- 17 1-17 1-17 1-17 1-19 1-21	
2.	HAZ	ARD IDE	ENTIFICATION AND MITIGATION	2-1	

	2.1	Chemica	al and Radiological Hazards and Mitigation	.2-1
		2.1.1	Routes of Exposure	2-3
	2.2	Safety a	nd Physical Hazards and Mitigation	2-22
		2.2.1	Material Handling and Back Strain	. 2-22
		2.2.2	Repetitive Motion and Musculoskeletal Disorders	. 2-22
		2.2.3	Working and Walking Surfaces	2-22
		2.2.4	Proper Housekeeping to Prevent Slips, Trips, and Falls	2-22
		2.2.5	Elevated Work Areas	2-23
		2.2.6	Means of Egress	
		2.2.7	Powered Equipment and Tools	.2-23
		2.2.8	Electrical Hazards and Energized Systems	2-23
		2.2.9	Operational Fire Hazards and Prevention	2-24
		2.2.10	Flammable and Combustible Materials Hazards	
		2.2.11	Pressurized Systems	
		2.2.12	Cryogenics	2-26
		2.2.13	Compressed Gases	
		2.2.14	Excavator, Equipment, and Vehicle Hazards	2-26
		2.2.14	Excavation, Surface Penetrations, and Outages	2-27
		2.2.16	Hoisting and Egging of Equipment	
		2.2.17	Overhead Hazards	
		2.2.17	Personal Protective Equipment	
		2.2.19	Decontamination	2-29
	2.3	Environ	mental Hazards and Mitigation	.2-30
		2.3.1	Noise	2-30
		2.3.2	Heat and Cold Strees and Ultraviolet Light Hazards	.2-30
		2.3.3	Confined Spaces	
		2.3.4	Biological Hazards	
		2.3.5	Inclement Weather Conditions	2-34
	2.4	Other Pr	roject Hazards	2-35
	2.5	Site Ins	pections	.2-35
3			MONITORING AND SAMPLING	3-1
3				
	3.1	Airborn	e Exposure Engineering Controls	3-1
	3.2	Exposu	re Limits	. 3-12
	3.3	Environ	mental and Personnel Monitoring	. 3-12
		3.3.1	Industrial Hygiene Area and Personal Monitoring and Instrument Calibration	3-12
		3.3.2	Radiological Monitoring and Instrument Calibration	.3-13
		3.3.3		. 3-13
		3.3.4	Personnel Radiological Exposure Monitoring	.3-14

4.	ACC	IDENT A	AND EXPOSURE PREVENTION	4-1
	4.1	Volunt	ary Protection Program and Integrated Safety Management System	4-1
	4.2	Genera	l Safe-Work Practices	4-1
	4.3	Subcor	ntractor Responsibilities	4-3
	4.4	Radiolo	ogical and Chemical Exposure Prevention	4-4
		4.4.1	Radiological Exposure Prevention — As Low as Reasonably Achievable	4-4
		4.4.2	Principles	4-4 4-7
	4.5	Buddy	System	4-8
5.	PER	SONAL 1	PROTECTIVE EQUIPMENT	5-1
	5.1	Respira	ntory Protection	5-3
	5.2	Persona	al Protective Equipment Levels	5-3
		5.2.1 5.2.2 5.2.3 5.2.4	Level D Personal Protective Equipment Level C Personal Protective Equipment Level B Personal Protective Equipment Level A Personal Protective Equipment	5-3
	5.3	Persona	al Protective Clothing Upgrading and Downgrading	5-6
		5.3.1 5.3.2	Upgrading Criteria for Personal Protective Equipment Downgrading Criteria	
	5.4	Inspect	ion of Personal Protective Equipment	5-7
6.	PER	SONNEL	TRAINING	6-1
	6.1	Trainin	g	6-1
	6.2	Personnel Selection		6-1
	6.3	Qualification and Certification Processes		
	6.4	Implementation of Training		
	6.5	Training Records 6		
	6.6	Project Operations-SpecificTraining		
	6.7	Prejob	and Postjob Briefings and Safety Meetings	6-4
7	SITE	CONTR	POLAND SECURITY	7_1

	7.1	Radiological Confinement Zones	7-1		
	7.2	Radiologically Contaminated Material Release	7-2		
	7.3	Site Security	7-2		
	7.4	Wash Facilities and Sanitation	7-2		
	7.5	Designated Eating Areas and Smoking Area	7-2		
8.	OCC	UPATIONAL MEDICAL SURVEILLANCE	8-1		
	8.1	Project Operations Subcontractor Workers	8-2		
	8.2	Injuries at the Operable Unit 7-10 Project Site	8-2		
	8.3	Substance-Specific Medical Surveillance	8-4		
9.	PERS	SONNEL ROLES AND RESPONSIBILITIES	9-1		
	9.1	Project Operations Personnel	9-2		
		9.1.1 Project Operations Management	9-2 9-2 9-3 9-4 9-4		
10.	EME	RGENCY RESPONSE PLAN	10-1		
	10.1	Preemergency Planning			
	10.2	2 Emergency Preparation and Recognition			
	10.3	B Emergency Facilities and Equipment			
	10.4	Emergency Communications	10-3		
		10.4.1 Notifications	10-4		
	10.5	Personnel Roles. Lines of Authority. and Training	10-4		
		 10.5.1 Idaho National Engineering and Environmental Laboratory Emergency Response Organization	10-4 10-4		
	10.6				
	10.0	Emergency Alerting. Responses. and Sheltering	10-6		
	10.7	Fyacuation Assembly Areas and Central Facilities Area Medical Facility	10-6		
	10)/	Evacuation Assembly Areas and Central Facilities Area Medical Facility	1()_>		

	10.8 Medical Emergencies and Decontamination)-8
	10.9 Reentry. Recovery. and Site Control)-8
	10.9.1 Reentry 10 10.9.2 Recovery 10-	
	10.10 Critique of Response and Follow-up	11
	10.11 Telephone and Radio Contact Reference List	11
11.	DECONTAMINATION PROCEDURES	l _ 1
	11.1 Contamination Control and Prevention	i _1
	11.2 Equipment and Personnel Decontamination	l-2
	11.2.1 Equipment Decontamination1111.2.2 Personnel Decontamination1111.2.3 Decontamination in Medical Emergencies11	1-2
	11.3 Doffing Personal Protective Equipment and Decontamination	l-3
	11.3.1 Modified Level D Personal Protective Equipment Doffing and Decontamination	1-4
	11.4 Personnel Radiological Contamination Monitoring	i -4
	11.5 Storage and Disposal of Operational Waste Materials	l - 5
	11.6 Project Sanitation and Waste Minimization	l -5
12.	RECORDKEEPING REQUIREMENTS	2-1
	12.1 Industrial Hygiene and Radiological Monitoring Records	2-1
	12.2 Records Management	2-1
13.	REFERENCES	3-]
	FIGURES	
1_1.	Map showing the location of the Radioactive Waste Management Complex at the Idaho National Engineering and Environmental Laboratory	1-2
1-2.	Location of dig area of Operable Unit 7-10 within the Subsurface Disposal Area at the Radioactive Waste Management Complex	1-5

1-3.	Plan view of the Operable Unit 7-10 Glovebox Excavator Method Project area showing project site structures	1-7
1-4.	WMF-671 Weather Enclosure Structure housing the Retrieval Confinement Structure and the Packaging Glovebox System	1-8
1-5.	Drawing showing layout of individual gloveboxes for the Operable Unit 7-10 Glovebox Excavator Method Project inside WMF-671 Weather Enclosure Structure	1_11
1-6.	External excavator to the Retrieval Confinement Structure boot assembly	1_13
1-7.	Four major hnctions associated with the Operable Unit 7-10 Glovebox Excavator Method Project facility shutdown process	1-22
9-1.	Operations organizational interfaces for the Operable Unit 7-10 Glovebox Excavator Method Project	9-1
10-1.	Evacuation and assembly areas at the Radioactive Waste Management Complex	10-9
10-2.	Map showing the route to the nearest medical facility (Central Facilities Area-1612)	0-10
	TABLES	
2-1.	Dominant waste forms in the Stage I (project excavation) area	2-2
2-2.	Total activities for radiological contaminants in Operable Unit 7-10 decayed to 34 years (1969–2003) using RadDecay	2-4
2-3.	Chemical inventory for Operable Unit 7-10 and the Stage I area	2-5
2-4.	Evaluation of chemicals and potential agents that may be encountered	2-6
2-5.	Summary of project operational activities, associated hazards, and mitigation	2-14
2-6.	Heat stress signs and symptoms of exposure	2-3 1
2-7.	Cold stress work and warm-up schedule	2-33
3-1.	Tasks and hazards to be monitored and monitoring instrument category	3-2
3-2 .	Monitoring instrument category and description	3-4
3-3.	Action levels and associated responses for project operational hazards	3-5
5-1.	Respiratory and protective clothing selection guidance	5-2
5-2.	Levels and options of personal protective equipment	5-4
5-3.	Inspection checklist for personal protection equipment	5-7
6-1.	Minimum required training for access to Operable Unit 7-10 Project operational areas	6-3
10-1.	Emergency response equipment to be maintained at the Operable Unit 7-10 Project site during operations	10-3

10-2.	Responsibilities during an emergency	10-5
10-3.	Operable Unit 7-10 Project emergency contact list	10-12

ACRONYMS

ACGIH American Conference of Governmental Industrial Hygienists

ALARA as low as reasonably achievable

ANSI American National Standards Institute

CAM constant air monitor

CAS criticality alarm system

CERCLA Comprehensive Environmental Response, Compensation, and Liability Act

CFA Central Facilities Area

CFR Code of Federal Regulations

CPR cardiopulmonary resuscitation

D&D&D deactivation, decontamination, and decommissioning

dBA decibel A-weighted

DOE U.S. Department of Energy

NE-ID U.S. Department of Energy Idaho Operations Office

DSS dust-suppression system

EPA U.S. Environmental Protection Agency

ERO Emergency Response Organization

FFA/CO Federal Facility Agreement and Consent Order

FFS Facility Floor Structure

FGE fissile gram equivalent

FMM fissile material monitor

GDE guide

GI gastrointestinal

HASP health and safety plan

HAZWOPER hazardous waste operations and emergency response

HEPA high-efficiency particulate air

ICDF INEEL CERCLA Disposal Facility

IDLH immediately dangerous to life or health

IH industrial hygienist

INEEL Idaho National Engineering and Environmental Laboratory

ISMS Integrated Safety Management System

JSA job safety analysis

LEL lower explosive limit

LO/TO lockout and tagout

MCP management control procedure

MSDS material safety datasheet

NFM nuclear facility manager

NFPA National Fire Protection Association

NIOSH National Institute of Occupational Safety and Health

NRR noise reduction rating

OMP Occupational Medical Program

OSHA Occupational Safety and Health Administration

OU operable unit

PC performance criterion

PCB polychlorinated biphenyl

PCM personal contamination monitor

PEL permissible exposure limit

PGS Packaging Glovebox System

PPE personal protective equipment

PRD program requirements document

RadCon Radiological Control

RCIMS Radiological Control and Information Management System

RCM Radiological Control Manual

RCRA Resource Conservation and Recovery Act

RCS Retrieval Confinement Structure

RCT radiological control technician

ROD record of decision

RW radiological worker

RWMC Radioactive Waste Management Complex

RWP radiological work permit

SCBA self-contained breathing apparatus

SDA Subsurface Disposal Area

STD standard

SWP safe work permit

TLD thermoluminescent dosimeter

TLV threshold limit value

TPR technical procedure

TRU transuranic

TSDF Treatment, Storage, and Disposal Facility

TWA time-weighted average

UV ultraviolet

VPP Voluntary Protection Program

WAC waste acceptance criteria

WCC Warning Communications Center

WES Weather Enclosure Structure

Health and Safety Plan for OU 7-10 Glovebox Excavator Method Project Operations

1. WORK SCOPE

1.1 Purpose

This health and safety plan (HASP) identifies health and safety hazards and requirements used to eliminate or minimize hazards during Operable Unit (OU) 7-10 Glovebox Excavator Method Project operations within the Subsurface Disposal Area (SDA) of the Radioactive Waste Management Complex (RWMC). The OU 7-10 Project is part of the Idaho Completion Project at the Idaho National Engineering and Environmental Laboratory (INEEL). This HASP has been written to meet the requirements of the Occupational Safety and Health Administration (OSHA) *Code of Federal Regulations* (CFR) standard, 29 CFR 1910.120(2002), "Hazardous Waste Operations and Emergency Response."

This HASP has been prepared to address OU 7-10 Project operational hazards and associated mitigation based on general operations within the OU 7-10 Project operationally controlled area at the RWMC. This HASP is applicable to all operational activities following construction through facility layup (but not including deactivation, decontamination, and decommissioning). This plan and additional job safety analyses (JSAs), operational technical procedures (TPRs), and management control procedures (MCPs) will hrther define OU 7-10 Project operational hazards, hazard mitigation, and procedural requirements as the facility begins operation and new hazards are identified. This HASP will be reviewed and revised, as appropriate, by OU 7-10 Project Industrial Hygiene, Industrial Safety, and Radiological Control (RadCon) operations personnel to ensure its effectiveness and suitability for OU 7-10 Project operations.

1.2 Applicability and Jurisdiction

Project operations will be conducted under the administrative controls of a safety analysis. Technical procedures, JSAs, and other appropriate project health and safety evaluations will be conducted to ensure operations are conducted in compliance with the facility authorization basis. Project operations will fall within the jurisdiction of the RWMC operations director. This HASP applies to all personnel conducting OU 7-10 Project operational activities in these areas.

1.3 Site Description of the Idaho National Engineering and Environmental Laboratory

The INEEL is a U.S. government-owned test site located (32 mi) west of Idaho Falls in southeastern Idaho (see Figure 1-1) and managed by the U.S. Department of Energy (DOE). The INEEL encompasses approximately 2,305 m² (890 mi²) of the northeastern portion of the Eastern Idaho Snake River Plain. The Eastern Idaho Snake River Plain is a relatively flat, semiarid, sagebrush desert with predominant relief being manifested either as volcanic buttes jutting up from the desert floor or as unevenly surfaced basalt flows or flow vents and fissures. Elevations on the INEEL range from 2,003 m (6,572 ft) in the southeast to 1,448 m (4,750 ft) in the central lowlands, with an average elevation of 1,516 m (4,975 ft). Drainage within and around the plain recharges the Snake River Plain Aquifer, a sole-source aquifer that flows beneath the INEEL and surrounding area. The aquifer is approximately 137 m (450 ft) below ground surface within the Site boundaries. Regional groundwater flow is southwest at average estimated velocities of 1.5 m/day (5 ft/day).

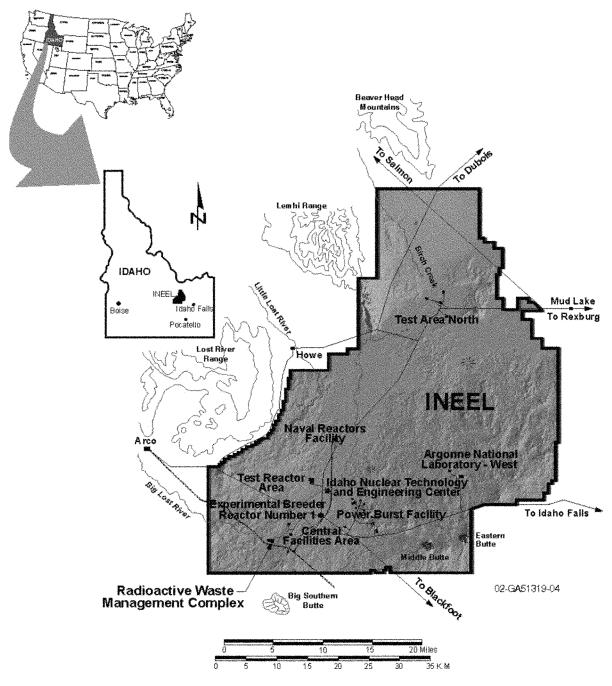


Figure 1-1. Map showing the location of the Radioactive Waste Management Complex at the Idaho National Engineering and Environmental Laboratory.

1.4 History

The U.S. Atomic Energy Commission initially established the Site in 1949 as the National Reactor Testing Station for nuclear energy research and related activities. In 1952, the Site expanded its function and began accepting shipments of transuranic (TRU) radionuclides and radioactive low-level waste. In 1974, it was redesignated the Idaho National Engineering Laboratory, and then, in 1997, to reflect the expansion of its mission to include a broader range of engineering and environmental management activities, the name was changed to INEEL. Currently, the INEEL is used to support the engineering efforts and operations of the DOE and other federal agencies in areas of nuclear safety research, reactor development, reactor operations and training, nuclear defense materials production, waste management technology development, and energy technology and conservation programs. The U.S. Department of Energy Idaho Operations Office (NE-ID)"has responsibility for the INEEL and delegates authority to operate the INEEL to government contractors. Bechtel BWXT Idaho, LLC, is the current management and operating contractor for the INEEL.

1.5 Background and Description of the Radioactive Waste Management Complex

The RWMC was established in the early 1950s as a disposal site for solid low-level waste generated by operations at the INEEL and other DOE laboratories. Radioactive waste materials were buried in underground pits, trenches, soil vault rows, and one aboveground pad (Pad A) at the SDA. Transuranic waste is kept in interim storage in containers on asphalt pads at the Transuranic Storage Area. Radioactive waste from the INEEL was disposed of in the SDA starting in 1952. Rocky Flats Plant (RFP)^b TRU waste was disposed of in the SDA from 1954to 1970. Post 1970 transuranic waste is kept in interim storage in containers on asphalt pads at the Transuranic Storage Area.

In August 1987, in accordance with the "Resource Conservation and Recovery Act" (RCRA), Section 3008(h) (42 USC § 6901 et seq., 1976), the DOE and the U.S. Environmental Protection Agency (EPA) entered into a Consent Order and Compliance Agreement (DOE-ID 1987). The Consent Order and Compliance Agreement required DOE to conduct an initial assessment and screening of all solid and hazardous waste disposal units at the INEEL and set up a process for conducting any necessary corrective actions. On July 14, 1989, the EPA (under the authority granted to them by the "Comprehensive Environmental Response, Compensation and Liability Act [CERCLA] of 1980" [42 USC § 9601 et seq., 19801, as amended by the "Superfund Amendments and Reauthorization Act of 1986" [Public Law 99-499, 19861) proposed that the INEEL be listed on the "National Priorities List" (54 FR 29820, 1989). The final rule that listed the INEEL on the National Priorities List was published on November 21, 1989, in 54 FR 48184 (1989). On December 4, 1991, because of the INEEL's listing on the National Priorities List, DOE, EPA, and the Idaho Department of Health and Welfare entered into the Federal Facility Agreement and Consent Orderfor the Idaho National Engineering Laboratory (DOE-ID 1991). The Federal Facility Agreement and Consent Order (FFA/CO) established the procedural framework and schedule for developing, prioritizing, implementing, and monitoring response actions at the INEEL in accordance with CERCLA (42 USC 6901 et seq., 1976), RCRA, and the Idaho "Hazardous Waste Management Act" (Idaho Code § 39-4401 et seq., 1983).

a. **NE-ID** signifies that the DOE Idaho Operations Office reports to the DOE Office of Nuclear Energy, Science, and Technology (NE).

b. The Rocky Flats Plant, located 26 km (16 mi) northwest of Denver, Colorado, was renamed the Rocky Flats Environmental Technology Site in the mid-1990s. In the late 1990s it was again renamed to its present name, the Rocky Flats Plant Closure Project.

1.6 Background and Description of the Operable Unit 7-10 Glovebox Excavator Method Project

Operable Unit 7-10 (see Figure 1-2) was identified for an interim action under the FFA/CO (DOE-ID 1991), as described in the *Record & Decision: Declaration or Pit 9 at the Radioactive Waste Management Complex Subsurface Disposal Area at the Idaho National Engineering Laboratory, Idaho Falls, Idaho* (DOE-ID 1993). Under the FFA/CO, the INEEL is divided into 10 waste area groups (WAGs). These WAGs are hrther subdivided into OUs. The RWMC has been designated as Waste Area Group 7 and was subdivided into 13 OUs. Pit 9 comprises OU 7-10.

The 1993 OU 7-10 Record of Decision (ROD) (DOE-ID 1993) and the Explanation & Significant Differences for the Pit 9 Interim Action Record & Decision at the Radioactive WasteManagement Complex at the Idaho National Engineering and Environmental Laboratory (DOE-ID 1998) specify environmental remediation of TRU waste from OU 7-10. Initially, remediation of OU 7-10 was to be conducted under a subcontract. Later, after experiencing delays, the remediation was divided into three stages:

- Stage I included the in situ TRU waste characterization through probe holes and core sample retrieval and analysis
- Stage II included the retrieval of all materials from a 20 x 20-ft area of the pit down to bedrock
- Stage III would rely on information obtained during Stages I and II to determine the appropriate interim action for the remainder of OU 7-10.

Stage II retrieval 90% design was developed between NE-ID (see Footenote a), the Idaho Department of Environmental Quality, and the EPA. It was a complex design that provided for methodical waste retrieval as well as precise recovery of in situ characterization data. Because the Stage II 90% design was time consuming to build and operate, DOE requested a schedule extension for its implementation. The Idaho Department of Environmental Quality and the EPA denied the request, which led DOE to implement a formal dispute resolution process described by the INEEL FFA/CO. As part of the dispute resolution process, INEEL conducted a study to find a safe, faster, and less costly means to conduct the Stage II retrieval demonstration. On July 23, 2001, the INEEL began a comparison of alternative methods to accomplish the Stage II waste retrieval demonstration at OU 7-10. As a result of this comparison, the Glovebox Excavator Method approach was recommended as the Stage II path forward because it provides the best balance of schedule, cost, and risk of the options analyzed (INEEL 2001).

The OU 7-10 Glovebox Excavator Method relies on a commercial excavator with the cab and operator located outside a confinement structure. Gloveboxes house material handling and packaging operations, and an insulated fabric enclosure isolates the confinement structure and the gloveboxes from the outside environment.

Specific objectives for the OU 7-10 Glovebox Excavator Method Project are to:

- Demonstrate waste zone material retrieval
- Provide information on any contaminants of concern present in the underburden
- Characterize waste zone material for safe and compliant storage
- Package and store waste onsite, pending decision on final disposition.

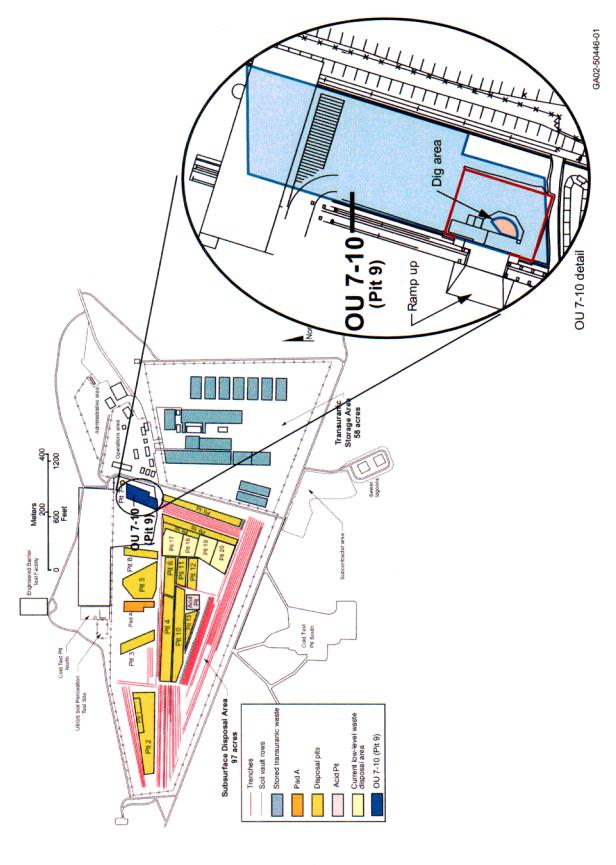


Figure 1-2. Location of dig area of Operable Unit 7-10 within the Subsurface Disposal Area at the Radioactive Waste Management Complex.

Facilities associated with the OU 7-10 Project are located at OU 7-10 and surrounding areas. The OU 7-10 Project excavation area is defined by a 20-ft x 145-degree arc down to but not including the underburden. The Project will remove at least 75 yd³ of material from the waste zone in this arc and will sample the underburden. The excavation area was selected based on shipping records that indicate that this area contains high concentrations of volatile organic compounds and on recent probe data that indicate that one small portion of this area could contain a high concentration of TRU radionuclides.

1.7 Project Facility Overview

The project includes waste zone material excavation, sizing (when needed), sampling, packaging, assaying, and storage. Materials within the waste zone are placed primarily in 55-gal drums. A secondary capability exists for placing waste zone materials in 85-gal drums. The packaged material is then weighed, radioassayed, and placed into onsite CERCLA-compliant storage. The packaged material will then be stored onsite, pending decision on final disposition.

The project facilities include the WMF-671 Weather Enclosure Structure (WES) that houses the Facility Floor Structure (FFS), Retrieval Confinement Structure (RCS), a commercial excavator, and the Packaging Glovebox System (PGS) that comprises three gloveboxes attached to the RCS. Personnel support trailers, an assay system, and one or more CERCLA-compliant storage areas are next to the WMF-671 WES (see Figures 1-3 and 1-4).

The WMF-671 WES consists of a prefabricated steel frame with an insulated membrane that is tensioned over the frame to provide a tight-fitting shell. A structural floor placed over the ground provides a stable working surface for forklifts, personnel, and confinements. The WMF-671 WES provides vital support hnctions, such as operational lighting, localized radiant heating, life safety systems, fire detection and suppression, ventilation, and filtration of the exhaust air.

The RCS is constructed over the retrieval area and is a confinement for radiological and hazardous material releases during excavation and retrieval activities. The RCS is constructed of a steel ceiling, steel floor, and steel wall plates attached to a structural steel framework. The RCS is equipped with windows, sealed penetrations and interfaces, personnel vestibules, gloveports, an excavator confinement interface for operation of the excavation system, and a bank of high-efficiency particulate air (HEPA) filters that are inlets and outlets for the ventilation system.

The gloveboxes are constructed of a steel frame, stainless steel bottom, clear panels, gloveports with gloves, rail-mounted transfer carts, operator work platforms, and HEPA filter inlets for the ventilation system. Three packaging stations are included in each glovebox for loading waste into new drums. Each station is accessed through a port in bottom of the glovebox. The new drums and drum loadout ports and bag-out rings are within contamination control structures referred to as drum loadout enclosures.

The RWMC facilities located nearest to the project facilities are as follows:

- An OU 7-10 retrieval structure and rails, a process building, a chemical warehouse, and support facilities that were constructed during a Pit 9 Project by a previous contractor and then abandoned before use
- Activities being conducted at the SDA for removal of organic contamination in the vadose zone

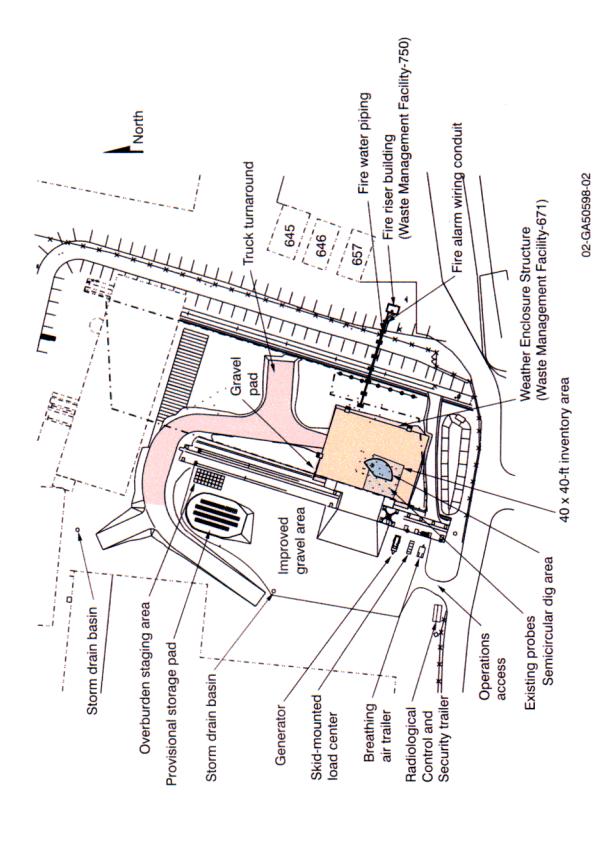


Figure ₩-3. Plan view of the Operable Unit 7-10 Glovebox Excavator Method Project area showing project site structures.

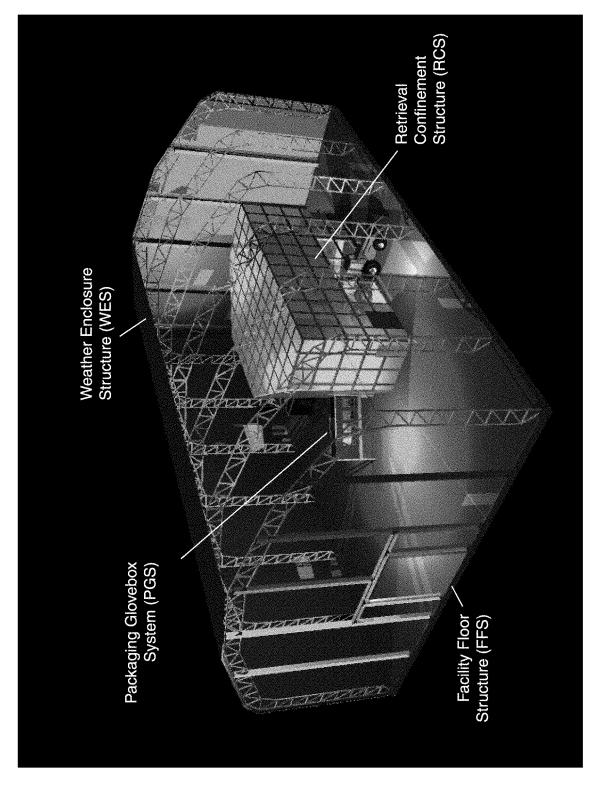


Figure 1-4. WMF-671 Weather Enclosure Structure housing the Retrieval Confinement Structure and the Packaging Glovebox System.

- Active low-level waste pit at the SDA
- Heavy equipment storage shed (WMF-609)
- Field support trailers (i.e., WMF-645, WMF-646, WMF-657)
- Radiation Control Field Office (WMF-601)
- Radioactive Waste Management Comlex Highbay (WMF-602)
- Advanced Mixed Waste Treatment Facility
- Significant physical interfaces with RWMC systems include connection to the RWMC firewater supply, alarm, and electrical power systems.

1.8 Project Key Facility Components

Operational aspects of the OU 7-10 Project are described in the following sections. Each activity associated with OU 7-10 Project operations will incorporate hazard identification and mitigation measures and follow requirements of MCP-3562, "Hazard Identification, Analysis and Control of Operational Hazards," or Standard (STD) -101, "Integrated Work Control Process."

1.8.1 Weather Enclosure Structure

The WMF-671 WES is a commercially available enclosure measuring approximately 80 x 110 x 35 ft and is attached to the FFS. Figure 1-5 shows the WMF-671 WES facility layout. Operating personnel work within the WMF-671 WES during excavation and packaging operations. The WMF-671 WES consists of a prefabricated steel frame with an insulated membrane cover. The membrane is impregnated with flame resisting compounds. Although not considered equivalent to the fire-resistive characteristics of noncombustible materials, the WMF-671 WES achieves the fire protection objectives of the National Fire Protection Association (NFPA) 801, "Standard for Fire Protection for Facilities Handling Radioactive Materials," (NFPA 1998) with no reliance on the fire resistive characteristics of its construction. Thus, it is concluded that this construction method is appropriate for the WMF-671 WES. The NE-ID has agreed with this design decision.

The WMF-671 WES provides vital support hnctions such as operational lighting, localized radiant heating, life safety systems, fire detection and suppression, ventilation, and filtration of the exhaust air. Fire protection for the WMF-671 WES is provided by an automatic dry-pipe sprinkler system plus detection and alarm systems.

For protection of the RCS and PGS, which are designated safety-significant, the WMF-671 WES is designed to meet performance criterion (PC) -2 wind-loading criteria identified in "DOE-ID Architectural Engineering Standards" (DOE-ID 2003). Meeting this criterion is bounding for seismic events. The WMF-671 WES also is designed with a structural framing to resist loading from snow, rain, and other weather-imposed loads. Lightning protection is provided on the outside of the WMF-671 WES and is designed to protect the facilities and personnel from the effects of a lightning strike.

1.8.2 Retrieval Confinement Structure

The RCS is a Nuclear Fuel Services, Inc.-Radiation Protection Systems, Inc. Perma-Con system manufactured by Kelly Klosure Systems interfaced with the excavator, FFS, and PGS. The Perma-Con

c. Jerry L. Lyle, DOE-ID, Memorandum to Mark W. Frei, INEEL, "Fire Protection Equivalency Request for OU 7-10 Glovebox Excavator Method," January 10,2002, DOE-ID-FPEQ-02-10.

system is a commercially available radiological confinement system constructed of stainless steel modular panels that lock together. Cross-members are provided within the panels to provide support for the steel panels. The structure is connected to the FFS and the three gloveboxes that makeup the PGS. Joints in the RCS are sealed with sealant and tape.

The RCS interface to the excavator is through inner and outer booted confinement assemblies. The inner boot assembly seals the boom pivot cylinder area and hydraulic hose opening area in the excavator frame. The outer assembly seals the excavator frame to the RCS. The inner assembly is a steel plate box constructed around the boom pivot cylinders and hydraulic hose opening. The inner assembly includes bulkhead fittings that interface to hydraulic hoses and an opening with a bolted steel plate to allow access to both sides of the bulkhead fittings. To seal the hydraulic hose opening, steel plates with hydraulic hose bulkhead fittings are welded to the excavator frame and boom pivot box. The outer booted confinement assembly is flexible to ensure seal integrity against small excavator movements and vibration, provides a barrier that shields the internal seal assembly from direct flame impingement, and is resistant to attack by waste zone materials. The outer boot consists of steel sheet welded to the outer excavator frame, steel angle, flat gasket material, Unistrut, fire shield, and commercial bulkhead connectors (see Figure 1-6).

The RCS viewing windows are made of Lexan. The viewing window in front of the operator's cab provides line of sight to portions of the excavation and the inside of the RCS. Lexan windows are combustible. By NE-ID approval of an equivalency request, the use of Lexan windows in the RCS is appropriate for the project.^d

Closed-circuittelevision cameras located in the roof of the RCS and connected to a video monitor in the operator's cab provide views of the excavation that cannot be seen through the window. Lights located on the RCS aid in visibility.

Access to and exit from the RCS is through a stainless steel panel door located in the personnel access room or through the personnel emergency transfer vestibule near the exhaust HEPA filter bank. Gloveports and transfer ports are located in some RCS panels to allow equipment or material transfer and manual manipulation without entering the RCS. Equipment and material enters and exits the RCS through stainless steel panel double doors in the transfer vestibule. The access doors are self-sealing.

Cable, pipe, hose, and other penetrations through the RCS are sealed by a variety of methods to ensure there are no leaks to the WMF-671 WES or the personnel and transfer vestibules. Several of the penetrations allow a radiological control technician (RCT) to insert a probed instrument into the RCS for the purpose of performing air monitoring.

The passive confinement features of the RCS are safety-significant and are designed to meet PC-2 seismic-performance criteria identified in "DOE-ID Architectural Engineering Standards." The WMF-671 WES is designed for PC-2 wind performance criteria and protects the RCS from this and other events.

_

d. Jerry L. Lyle, DOE-ID, Memorandum to Miriam Taylor, INEEL, "Path Foreward for 10 CFR 830 Rule Requirements for Transportation at the INEEL," January 15,2002, EM-AM-02-001.

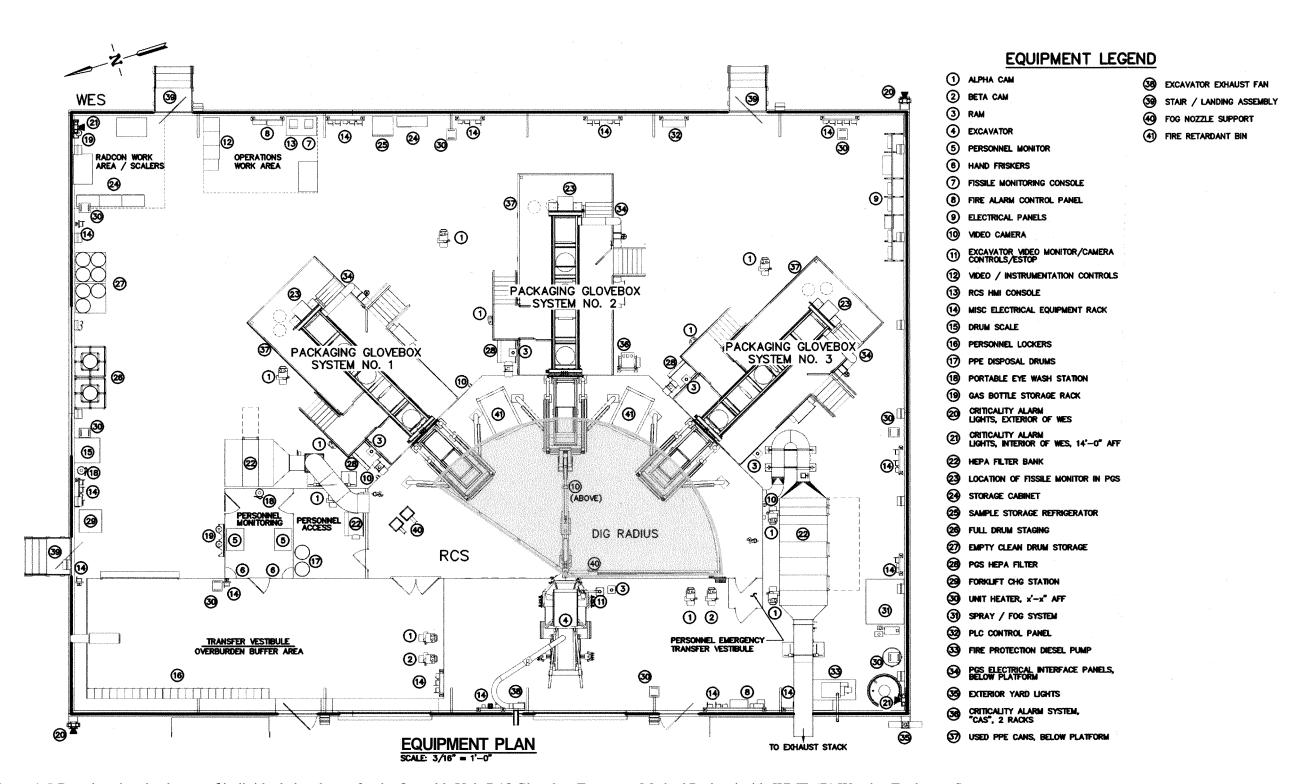


Figure 1-5. Drawing showing layout of individual gloveboxes for the Operable Unit 7-10 Glovebox Excavator Method Project inside WMF-671 Weather Enclosure Structure.

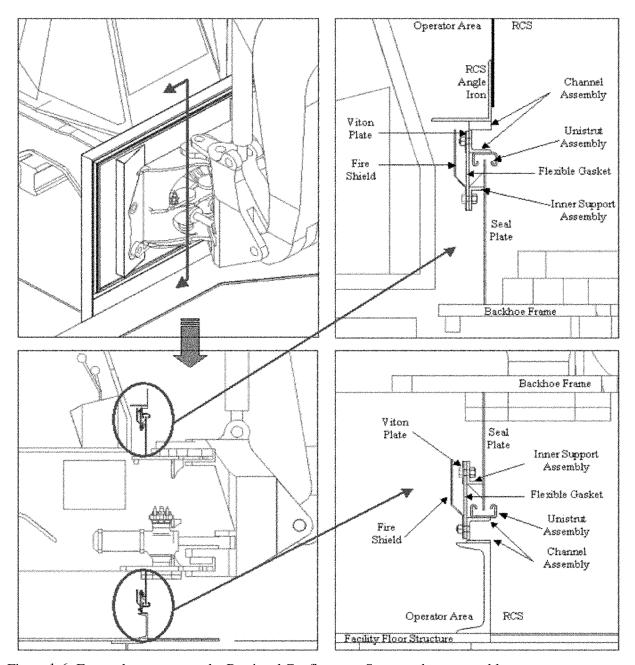


Figure 1-6. External excavator to the Retrieval Confinement Structure boot assembly.

1.8.3 Excavator

The excavator is a commercially available diesel engine backhoe loader that has been modified for the OU 7-10 Project to ensure contamination control and a stable confinement interface with the RCS. The tires, front-end loader bucket, bucket hydraulic cylinders, and outriggers are removed and the chassis is anchored to the FFS to prevent inadvertent motion. Physical stops are installed on the excavator to prevent contact of the end effectors with the RCS and RCS gloveports. Caps are seal welded on the RCS side of the stabilizer support frames and the lower mounting pins on stabilizers are welded closed to prevent contamination migration. Modifications to the excavator to provide the interface to the RCS are shown in Figure 1-6.

The excavator is controlled from inside the operator's cab, which is located at a window position outside the RCS to provide line-of-sight operations. Only the excavator arm extends into the RCS. The arm consists of a fixed-length boom, an extendable stick, and an end effector coupling controlled by the operator in the cab. The excavator can lift and move loads from any boom and stick position in the pit. The video monitor in the operator's cab provides the operator with views of areas that cannot be seen in the line of sight. A fan and duct connected to the excavator engine exhaust pipe ventilates exhaust from the excavator to outside the WMF-671 WES.

The structures and attachments to the FFS that ensure the excavator is immobile are designed to meet PC-2 seismic-performance criteria identified in "DOE-ID Architectural Engineering Standards." This design feature ensures that the excavator does not pull away from the RCS during a seismic event.

1.8.4 Packaging Glovebox System

The PGS consists of three rectangular gloveboxes attached in fan fashion to the RCS. The glovebox ends at the RCS are open and are sealed to the RCS. A structural steel framework that is anchored to the FFS supports each glovebox. The panels, penetrations, interfaces, and ports are sealed and secured to the frame or panels to ensure confinement. The assemblies are suitable for the waste zone materials.

The side panels consist of lower sections and one upper section. The lower panels are a laminate of chemically hardened glass on the outsides of Lexan. The upper panels and ceiling are a laminated safety glass material. This combination of composite panels at the bottom and laminated safety glass panels at the top and ceiling provides for a noncombustible structure that is capable of maintaining confinement during impact stresses. The floor and one end of each glovebox are constructed of stainless steel panels connected to a steel framework. A laminated safety glass window is located in the end steel panel of each glovebox. Each glovebox has an inlet HEPA filter, manual damper, and inlet filter ducting.

The gloves are suitable for the waste zone materials. For some operations, an outer leather glove is placed over the inner glove to provide protection from glove punctures and cuts.

Rail-mounted primary and auxiliary steel transfer carts service each glovebox. The glovebox operators manually position the auxiliary carts. The primary transfer carts are motor controlled, and limit switches control the range of movement. Cabling for the limit switches is through bulkhead fittings in the gloveboxes. The primary cart motors are located outside the gloveboxes. The primary transfer carts are about 7 in. (17.78 cm) deep, and each is capable of transporting about 3 ft³ of loose material or one intact drum.

Each glovebox has a rail-mounted electric chain hoist. Each transfer cart is fitted with a custom-made liner. For lifting purposes, webbing is sewn to the underside of the liner with lift loops at the four corners. To lift a load out of the cart, the four lift loops are grouped together on the hoist hook.

Three drum loadout stations are included in each glovebox system. Each drum loadout station is accessed through a cover in the bottom of the glovebox. A funnel leads from each loadout station into the drum loadout enclosure. Clean drum transfer bags are used to maintain a contamination barrier between the glovebox and the drum loadout enclosure during drum loadouts. A drum liner is placed in the transfer bag and then the liner-bag assembly is placed in the drum. The open end of the bag is secured to the drum bag-out ring.

The passive confinement features of the PGS are safety-significant and are designed to meet PC-2 seismic-performancecriteria identified in "DOE-ID Architectural Engineering Standards." The WMF-671

WES is designed for PC-2 wind performance criteria and protects the PGS from this and other natural events.

1.8.5 Drum Loadout Enclosures

During drum loadouts, the bag-out ring and new drum transfer bags form the primary confinement for the loadout area. A drum loadout enclosure is located under each glovebox and forms a contamination control barrier. The enclosures are constructed of fire resistant fabric panels on all sides with clear polyvinyl chloride windows, sleeves, and zippered molded plastic doors and are supported by grommets in the panels and ties to steel pipe frames. Interfaces are to the glovebox bag-out rings, the FFS, and the filters and ductwork leading to the RCS. Untestable inlet HEPA filters are located on each enclosure. The enclosure exhaust connects to the RCS by ductwork, a manually controlled damper, a testable HEPA filter, and another manually controlled damper. Lift tables located in the loadout enclosures position and support drums during drum packaging.

1.8.6 Personnel Monitoring, Personnel Access, and Transfer Vestibules

The personnel monitoring, personnel access, and transfer vestibules are Kelly Klosures Perma-Con System type structures similar to the RCS. The personnel monitor vestibule contains monitoring equipment for controlling exits from the personnel access and transfer vestibules. The personnel access vestibule accommodates the donning and doffing of personal protective equipment (PPE) for access and egress from the RCS personnel access door. The transfer vestibule provides a transition between the outside of the WMF-671WES and the interior process and personnel work areas. Full and empty drums, soil bags, transfer equipment, and personnel can move in and out of the transfer vestibule. Equipment doors allow access to the RCS from the transfer vestibule.

1.8.6.1 Facility Floor Structure. The FFS design includes the framing and flooring for the weather enclosure floor and the shoring box through the overburden. The floor structure covers about the same area as the WMF-671 WES. The FFS is designed to support and interface to the WMF-671 WES, RCS, PGS, excavator, and other structures and equipment within the WMF-671 WES.

The main framing consists of structural steel, wide-flange shapes. The wide flanges rest on the ground surface and are designed to span at least 24 ft between support locations to provide support if a pit subsidence occurs. The floor is metal decking topped with a plate that has a nonskid surface. Areas with high loads, such as the excavator support area, use a plate that is thicker than in other areas of the WMF-671 WES.

The floor is the working surface for personnel and supports small forklifts, pallet trucks, and other movable equipment and instrumentation. Design loads include personnel, equipment, other structures, wind, and earthquake.

The shoring box is a steel structure similar in design to trench boxes commonly used for construction excavation, the main differences being the shape and size of the box. The box provides the perimeter for the arc-shaped excavation area. The box is made from structural steel tubing and steel plate and forms walls 3.5 ft down into the overburden. Excavation deeper than the shoring box establishes an angle of repose to eliminate large sloughing events that could undermine the FFS. Installation involved excavation of a 3.5-ft-deeptrench around the perimeter of the retrieval area, installation of the metal shoring box in the trench, and backfilling the trench.

No reliance is placed on the FFS for the control of contaminated firewater. Any contaminated water that escapes the excavation area or other portions of the WMF-671 WES will be confined to the

OU 7-10 surfaces external to the WMF-671 WES and the storm water catch basin located to the south of OU 7-10. By NE-ID approval of an equivalency request, this contamination control method is considered appropriate for the OU 7-10 Project (see Footnote B).

The FFS within the RSC is safety-significant and is designed to meet PC-2 seismic-performance criteria identified in "DOE-ID Architectural Engineering Standards." The WMF-67 I WES is designed for PC-2 wind performance criteria and protects the FFS from this hazard.

1.8.7 Interim Storage Pad

The interim storage pad is an open gravel pad used for the interim storage of waste coming from the PGS. Onsite storage will be required pending a decision on final disposition or shipment to the INEEL CERCLA Disposal Facility (ICDF). An optional staging area that may be used is the overburden staging area.

Toxic Substances Control Act (15 USC § 2601 et seq., 1976) and RCRA cargo containers may be used for interim storage of Toxic Substances Control Act and RCRA waste coming from the PGS. Onsite storage or possibly WMF-628 will be required pending a decision on final disposition or shipment to the ICDF.

1.8.8 Comprehensive Environmental Response, Compensation, and Liability Act-Compliant Storage

Onsite storage of newly packaged waste materials may occur next to the WMF-671 WES or in WMF-628. The WMF-628 is a RCRA-permitted storage building at the RWMC. Storage in WMF-628 is addressed in the main body of the RWMC safety analysis report.

1.8.9 Overburden Staging Area

The overburden staging area is an open gravel pad located outside of the OU 7-10 boundary used to stage the bagged overburden soil until pit closure activities or optional transfer to ICDF or other acceptable disposal locations. The overburden staging area also may be used to stage waste containers after packaging.

1.8.10 Fire Riser Building

The fire riser building is a small heated, metal structure with a concrete floor. This structure contains the fire riser tie-in to RWMC services that supply the fire suppression systems for the WMF-671 WES and RCS and an air compressor for maintaining air pressure in the dry-pipe systems.

1.8.11 Radioassay Facility

Drums containing newly packaged waste zone materials are assayed before storage to ensure that the fissile material loading is less than or equal to 380 g fissile gram equivalent (FGE). The project has opted to use a commercially available trailer-mounted assay system. The trailer system would be located near the project interim storage pad. The trailer is equipped with an office and the detection unit.

1.8.12 Radiological Control and Security Trailer

The Radiological Control and Security Trailer is a commercially available structure set up at the project site. The trailer will contain essential radiological control equipment, such as portable

self-monitoring instruments, portable radiation detection instruments, and contamination count-rate instruments.

1.9 Project Operations and Processes

This subsection describes the activities and decisions relating to the OU 7-10 Project waste-material retrieval and handling process. It is expected that retrieval and packaging can be accomplished over a period of less than 3 months. The facilities then will be placed in a shutdown and lay-up condition and deactivation, decontamination, and decommissioning (D&D&D) will be performed.

1.9.1 Overburden Sampling

Overburden core samples may be collected by the project to provide data on possible contaminants of concern. The target overburden sample collection ranges from 0 to 3.5 ft deep. The number of samples collected will be determined based on a statistical confidence-level determination. Monitoring will be performed in the RCS, and workers in the RCS will wear PPE as required by the RCT, the safety professional, and the industrial hygienist (IH).

1.9.2 Overburden Removal

The overburden is removed from within the shoring box by the excavator working through the RCS wall and workers working inside the RCS. Steel and Lexan probes were inserted to various depths in the excavation area during Stage I of the OU 7-10 Project. Workers with hand tools are required for overburden removal around some of these probes. Monitoring will be performed in the RCS and workers in the RCS will wear PPE as required by the RCT, the safety professional, and the IH. The dust suppression system or hand operated portable spray units are used to keep the dust down and reduce the potential for contamination spread.

Excavated soils are placed in commercially available soil sacks. Before removal from the RCS, the soil sacks are closed by workers and are monitored by an RCT for contamination. After monitoring and decontamination, if required, the soil sacks are moved by material handling equipment from the RCS to the transfer vestibule where they are checked again for contamination. The sacks may be staged in the transfer vestibule pending movement to the overburden staging area pending disposal or reuse in the excavation.

1.9.3 Waste Zone Material Removal

The waste zone material, which includes interstitial soils, waste materials, and container remnants, is excavated by the excavator. The excavator operator maintains an angle of repose on the sides of the excavation to ensure that large sloughing events do not occur. Operators outside the RCS activate the dust-suppression system (**DSS**) as needed to control airborne dust. The **DSS** in conjunction with the ventilation system ensures that airborne contamination levels are controlled.

By design, the RCS and PGS are passive confinement systems. That is, on a loss of ventilation, contamination spread into the WMF-671 WES is not expected. However, as a precaution during loss of ventilation events, the excavator operator will return the controls to their neutral conditions, turn off the excavator engine, and leave the area with the glovebox operators and others in the WMF-671 WES. These precautions ensure that the excavator does not become a potential source of contamination spread outside the WMF-671 WES through the engine and exhaust, that the excavator air intake does not produce a negative pressure condition in the WMF-671 WES relative to the RCS and PGS, and that the operators in the WMF-671 WES do not become potential exposure targets during a loss of ventilation. Personnel will

be allowed back in the WMF-671 WES when ventilation is restored and a reentry survey by the RCT indicates it is safe with concurrence from the industrial hygienist. The RCT is directed by company procedures that specifically address loss of contamination incidents if a loss of contamination occurs. These precautions ensure that the excavator does not become a potential source of contamination spread outside the WMF-671 WES through the engine and exhaust, that the excavator air intake does not produce a negative pressure condition in the WMF-671 WES relative to the RCS and **PGS**, and that the operators in the WMF-671 WES are not potential exposure targets during a loss of ventilation.

Refueling of the excavator is from a portable fuel container that is brought into the WMF-671 WES. Fuel is transferred from the container to the fuel tank. The container is then removed from the WMF-671 WES. Drip pans are installed beneath the fuel tank and hydraulic reservoir to contain spilled or leaking fluids.

The dominant waste forms that will be encountered in the waste zone have been assessed based on an evaluation of shipping records for waste placed in a 12.2 x 12.2-m(40 x 40-ft) area, also referred to as the Stage I area, around and near the smaller excavation area addressed by this safety analysis. The results of this assessment are shown in RWT-01-99. The dominant waste form is drums of Series 743 sludge containing organics such as cutting oils and carbon tetrachloride (CCl₄). The next significant types of waste are drums containing contaminated combustible materials. Of lesser number are drums of evaporated salts (nitrates) and drums of graphite material (believed to be crushed molds).

The project is not required to remove all materials from the waste zone. Some of the steel and Lexan probes inserted during Stage I are relocated with the excavator and placed in other areas of the excavation. Unexpected materials such as compressed gas cylinders, containers of nonradiological materials that are pyrophoric (such as zirconium), laboratory generated waste (i.e., multiple containers of lab waste consolidated in a drum), and containerized unknowns may be left in place. Before removal from the excavation, a nonsparking tool attached to the excavator will puncture intact drums. The weight of waste zone materials is expected to be well within the handling limits of the excavator. Unexpected materials that could exceed the excavator design handling weight of 1,000 lb (454 kg) and that cannot be sized with the excavator to less than 1,000 lb (454 kg) are not removed from the excavation. Intact drums that may exceed the glovebox design basis drop weight of 350 lb (159 kg) and that cannot be sized with the excavator to less than 350 lb (159 kg) are not processed through the gloveboxes. Materials weighing less than these design-basis weights but that cannot be sized to fit in a 55- or 85-gal drum are not processed through the gloveboxes. The excavator operator, using readings from a pressure indicator, checks the weight of materials during lifts. Sizing of materials can take place in a drum-sizing tray when needed. The design dimensions of the drum-sizing tray prevent the accumulation of free liquids to a depth greater than 8 in. (approximately 10 L). The 2.6-gal limit is based on the criticality safety evaluation.

To ensure adequate radiation protection of the glovebox operators, each bucket and cart of waste zone material is monitored by an RCT located outside the confinement. Temporary shielding or special handling procedures may be required for waste zone materials with high radiation readings or the material may be returned to the excavation.

e. W. Thomas Roderick, INEEL, Interdepartmental Communication to David E. Wilkins, INEEL, "Waste Contents Associated with OU 7-10 Stages I/II Activities in Pit 9," April 16, 1999.

f. The waste is called Series 743 sludge because it was processed into sludge in the Rocky Flats Plant (RFP) Building 774 and was later coded at the Idaho National Engineering and Environmental Laboratory (INEEL) as Content Code 3 organic waste to distinguish it from other types of waste from RFP Building 774 that were shipped to the INEEL.

Lead shielding material or aerosol cans are not expected in the excavation area but may be encountered. These materials present an insignificant hazard and can be safely excavated and handled through the RCS and PGS.

After monitoring by the RCT, the excavator operator empties the bucket of waste zone materials in a transfer cart. The transfer cart is moved on rails by a drive system controlled by a glovebox operator.

If more than 2.6 gal (10 L) of free liquids (i.e., liquids that are visible and uncontained) at a liquid depth greater than 2.6 in. are observed in the retrieval area, operations in that area temporarily stop until an absorbent is added to the liquid. Operations can continue once the absorbent is added. The absorbent is a commercially available product that has been prestaged within the RCS. The excavator is used to apply the absorbent when needed. If simple absorption will not be effective based on the liquid observed or if absorption is not effective, work will stop and special-case handling procedures will be developed.

1.9.4 Packaging Glovebox System Operation

Glovebox system operation consists of monitoring and visual screening of waste, waste zone material sampling, packaging waste zone material, and sampling the underburden soils. Each of these is discussed in the following sections.

1.9.4.1 Monitoring and Visual Screening. Each cart of waste zone material is surveyed by an RCT. Temporary shielding or special handling procedures may be required for waste zone material with high radiation readings or the material may be returned to the excavation. Monitoring and visual screening of waste zone material are performed in the PGS by the glovebox operators. Hand tools are used by the operators to investigate the waste zone material to identify material requiring special handling, to ensure that the receiving Treatment, Storage, and Disposal Facility (TSDF) waste acceptance criteria (WAC) is met, and to identify unexpected materials that may require special handling procedures or additional safety analysis. There could be small amounts of polychlorinated biphenyls (PCBs) in some sludge. Waste material contaminated with PCBs is prohibited by the receiving TSDF WAC. Drums of PCB-contaminated waste zone material will require storage in cargo containers located near the WMF-671 WES until final disposition is determined. Each PGS is equipped with a fissile material monitor (FMM), which contains an Eu-152 radioactive source. The sources are contained inside the FMM during normal operations. Source-handling processes (i.e., source installation and removal) require special radiological controls that will be implemented through a radiological work permit (RWP). Some waste types will require fissile monitoring to ensure the receiving TSDF WAC of 200 g fissile material is met while others waste types will not (Sentieri 2003). Waste types requiring fissile monitoring are listed below:

- Intact HEPA filters
- High-efficiency particulate air filter media
- Material not distinguishable from HEPA filter media
- Intact graphite molds and large chunks of graphite molds (i.e., pieces greater than 2 in. in diameter)
- Other containerized unknown waste materials with the potential of having unsafe plutonium masses

These waste types may not undergo fissile monitoring if new data become available that indicate that the actual drum loadings are less than 200 g.

The materials to be monitored will be placed in a specimen container. The volume of the FMM specimen container is limited to no more than 5.5 gal. This container is then placed into the shielded monitoring station. The detectors are mounted outside the gloveboxes. Fissile monitoring is accomplished through a window.

Waste types not requiring fissile monitoring are as follows:

- Sludge
- Soils
- Drum remnants
- Personal protective equipment
- Plastic materials used in contamination control
- Materials that through process knowledge are known to not contain high concentrations of fissile material.

1.9.4.2 Waste Zone Material Sampling. The details about sample data quality objectives, sample location and frequency, sample designation, sampling equipment and procedures, sample handling and analysis, and sample waste management are found in the Field Sampling Planfor the OU 7-10 Glovebox Excavator Method Project (Salomon et al. 2003). The purpose of sampling is to characterize a portion of the retrieved waste zone material to satisfy the receiving TSDF WAC and to support safe and compliant storage. During retrieval activities, rudimentary classification of the waste zone materials is conducted. This classification will classify waste zone materials as soils and gravel and debris waste. It is expected that the predominant waste stream will be soils and gravel. The soils and gravel are considered a single waste stream and will be sampled by way of a composite sampling scheme wherein the contents of every drum will be represented. Within the soil and gravel designation, there are three subpopulations. The first is a possible nitrate bearing waste that will be sampled and undergo analysis to determine if it is reactive or ignitable (i.e., oxidizer) in accordance with RCRA. Visual screening will be used to identify suspect nitrate concentrations that require biased sampling of the waste zone material. The second is uncontainerized liquids that will be analyzed for PCBs. The third is pellets potentially containing cyanides (potassium or sodium cyanide). Physical samples of debris waste are not required.

Samples not described by the *Field Sampling Plan* may be required (Salomon et al. 2003). If warranted by the situation, additional samples may be collected using the framework of the field sample plan. Authorization to proceed with the collection and analysis of unplanned samples will be determined by management.

Samples are collected in sample containers located within the PGS. The sample container is passed through the transfer port into a french can. The french can is a commercially available double door transfer system that ensures confinement of contamination on the sample containers. The french cans may be temporarily stored in a refrigerator located in the WMF-671 WES until they can be transported onsite to Idaho Nuclear Technology and Engineering Center at the INEEL for analysis. A transport plan is prepared for the shipments. The transport plans and the NE-ID Transportation Safety Document ensure compliance with the safety analysis requirements of 10 CFR 830 Subpart B for transportation (see Footnote C). The residual sample materials are returned in a french can and removed from the can at a transfer port in the PGS. The residual sample materials are placed in new waste drums along with other waste zone materials during the waste zone material packaging process.

7.9.4.3 Packaging Waste Zone Material. Most of the packaging is in 55- or 85-gal drums. Sealable bags, referred to as special case bags, may be used to contain items such as bottles of liquid or other unexpected items. When necessary, the waste zone materials are sized in the glovebox using hand tools. Hold down straps can be attached to the transfer cart to secure waste zone materials during sizing if needed to ensure worker safety. A new drum liner is placed inside the drum transfer bag and the liner and bag assembly is placed in the new drum. The drum is positioned in the drum loadout enclosure on a lift table under a drum loadout port. The drum is raised on the lift table to under the drum loadout port. The open end of the transfer bag is secured to the loadout port with the bag-out ring. The glovebox operator removes the drum loadout cover in the glovebox and moves waste materials through the loadout port. The loadout port cover is closed, and the transfer bag is closed and becomes a part of the waste stream. The drum lid with filtered vents previously installed is secured, and the drums are surveyed while in the drum loadout enclosure. Drums are moved to a staging area within the WMF-671 WES or to the interim storage pad, pending assaying. The WMF-671 WES staging area is located spatially away from the excavator and heling equipment as a fire protection feature.

Fissile monitoring does not constitute an assay. Drums that have been assayed and confirmed to meet the storage WAC can be safely stored in any configuration.

The newly packaged waste drums have bar code labels. These labels are recorded, and the bar code label identification number is recorded along with a description of the container contents. The weight of the container may be recorded in an operational log.

Drums can be returned for repackaging if the assay results indicate the container is greater than 200 g FGE but \leq 380 g FGE. Repackaging involves placing the drum in an 85-gal drum, attaching the drum using the transfer bag and bag-out ring, and using the hoist to pull the overloaded drum into the glovebox for repackaging or removing by hand or the hoist individual liners or bags from the drum. If any new drum contains more than 380 g (13.4 oz) FGE, the drum will be handled in accordance with the applicable technical safety requirements.

7.9.4.4 Sampling the Underburden. A collection device attached to the excavator arm is used to gather core samples of the underburden. The samples are placed in containers in the RCS or PGS and then passed through transfer ports.

The details regarding sample data quality objects, sample location and frequency, sample designation, sampling equipment and procedures, sample handling and analysis, and sample waste management are found in the *Field Sampling Plan* (Salomon et al. 2003). The objectives of the underburden sampling are to determine the presence and migration of the contaminants of concern as documented in the 1993 OU 7-10 ROD (DOE-ID 1993). Visual examinations will be performed of the excavation bottom to identify underburden sample locations.

1.9.5 Postretrieval and Packaging Operations

Operations after underburden sampling are characterized as post retrieval and packaging. These operations are discussed in the following sections.

1.9.5.1 Facility Shutdown. At the conclusion of waste retrieval and underburden sampling operations, the OU 7-10 Project will perform facility shutdown activities to place the excavation and facility into a safe, known, and stable condition where it will remain in lay-up until D&D&D operations begin. Figure 1-7 shows the four major hnctions associated with facility shutdown.

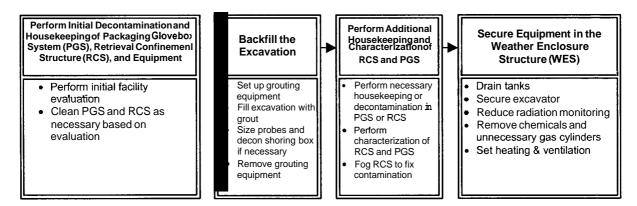


Figure 1-7. Four major functions associated with the Operable Unit 7-10 Glovebox Excavator Method Project facility shutdown process.

A summary of conditions expected after facility shutdown and to be monitored and maintained during the lay-up period is listed below:

- **Stage I investigation probes:** Probes that were pulled during excavation have been laid on the sides of the excavation area and covered by grout. Probes not pulled during excavation have been sized and do not extend above the grout surface.
- **Pit and shoring box:** The pit has been filled with a weak grout. Remaining contamination on the exposed portions of the shoring box is immobilized.
- Equipment inside the RCS and the PGS: Waste, grease, and loose dirt have been removed from the larger equipment inside the RCS and PGS. Tools and other small items have been left in place, bagged, or removed.
- Contamination on inside surfaces of RCS and the PGS glovebox skins: Bulk waste zone material has been removed from surfaces of the RCS and PGS. Gloves have been removed and gloveports and sample ports have been covered and sealed. The windows of the RCS and PGS have been decontaminated and left uncovered.
- **Heating and ventilation systems:** The heating and ventilation systems are left operating, but airflow may be reduced on the ventilation system. Airflow and negative differential pressure levels will be determined based on actual facility conditions by RadCon personnel to ensure continued confinement of radioactive contamination.
- **Fire detection and suppression systems:** The dry-pipe fire detection and suppression system in the RCS is operational. The RCS deluge, RCS carbon monoxide monitoring, and PGS fire suppression systems have been removed from service.
- **Excavator:** The excavator has been left operable and in place. Grease, loose dirt, and loose waste have been removed from the excavator arm and the arm will be in a resting position. Any leaking hydraulic fluid found from the excavator outside of the RCS has been cleaned, monitored for radiation, and the leaking area covered with clear plastic. The hydraulic system has been flushed, the fuel has been drained, and the battery disconnected.
- **Compressed air tanks:** The breathing air and plant air receiver tanks have been depressurized.

- Water tanks: Water has been removed from the DSS and the PGS fire suppression system. The tanks are expected to be free of Contamination. The valves at the RCS wall have been shut to close the potential path for contamination to the piping and water tanks.
- Radiological monitoring: Constant air monitors (CAMs), RAMs, personal contamination monitors (PCMs), and hand friskers remain operational although possibly reduced in number. The glovebox FMMs and the criticality alarm system have been removed from service.
- **Weather enclosure structure equipment:** Nonexxential systems have been taken out of service, and essential systems are prepared for extended lay-up.
- **Assay trailer:** The assay trailer is disconnected and removed from the site.
- 1.9.5.2 Facility Lay-Up Phase. The facility lay-up phase immediately follows facility shutdown. The duration of this phase will be kept to a minimum by initiating preparations for D&D&D in parallel with other activities. However, the facility has been designed such that this phase could be safely maintained for up to 1 year. The scope of activities performed within the facility during the lay-up phase includes surveillances, monitoring, and facility and equipment maintenance. Examples include routine RadCon surveillances to ensure continued confinement and control of radioactive contamination, monitoring of radiation and airborne contamination, monitoring of environmental emissions, and periodic maintenance of active and deactivated equipment. Preparations for the D&D&D phase are initiated.

The facility is expected to be in the same conditionjust before D&D&D as the facility lay-up phase. Should an unexpected radiological condition or equipment failure have occurred during lay-up, additional decontamination or equipment maintenance may have been performed.

1.9.5.3 Facility Deactivation, Decontamination, and Dismantlement Phase. The facility D&D&D phase will primarily involve deactivation and dismantlement of the OU 7-10 Project facility with site restoration of the OU 7-10 surface and associated OU 7-10 Project work areas. Debris treatment, excess equipment disposition, material transportation, and waste disposal also will be performed during the D&D&D phase.

Before D&D&D, the OU 7-10 Project team will perform a walk-down of the facilities and equipment with OU 7-10 Project engineering and RadCon personnel to ensure familiarization of the physical configuration for the shutdown phase. Work orders will be prepared to remove lockout and tagout (LO/TO) locks tags from equipment that will be used during the D&D&D phase.

1.10 Program Interfaces

The OU 7-10 Project is being conducted under the regulatory authority of CERCLA, the OU 7-10 ROD (DOE-ID 1993), and the Explanation of Significant Differences to the OU 7-10 ROD (DOE-ID 1998).

This project operates as a facility under the purview of the RWMC operations director. Project operations will be conducted in accordance with the project addendum to the RWMC safety analysis report, this HASP, interface agreement(s), and project operating procedures (standard and detailed).

2. HAZARD IDENTIFICATION AND MITIGATION

The OU 7-10 Glovebox Excavator Method Project includes excavation, handling, sizing (when needed), and packaging of waste, samples, and soils. Materials within the waste zone are placed primarily in 55-gal drums and secondarily in 85-gal drums. Operation of the project facilities will present physical, chemical, and radiological hazards to operations personnel, so identification and mitigation of these hazards is imperative to prevent injury or exposure to personnel conducting these activities. The primary objective of this section is to identify existing and anticipated hazards based on project operations and to provide controls to eliminate or mitigate these hazards which includes the following:

- Evaluation of project operations to determine the extent that potential industrial safety, radiological, nonradiological, and physical hazards may affect facility personnel
- Establishment of the necessary monitoring and sampling required to evaluate exposure and contamination levels, determine action levels to prevent exposures, and provide specific actions to be followed if action levels are reached
- Determination of necessary engineering controls, isolation methods, administrative controls, work practices, and (where these measures will not adequately control hazards) PPE to hrther protect project personnel from hazards.

The purpose of this hazard identification section is to lead the user to an understanding of the occupational safety and health hazards associated with project operational tasks. This will enable project management and safety and health professionals to make effective and efficient decisions related to the equipment, processes, procedures, and the allocation of resources to protect the safety and health of project personnel.

The magnitude of danger presented by these hazards to personnel conducting project operations in the WMF-671 WES, RCS, and PGS is dependent on both the nature of tasks being performed and the proximity of personnel to the waste materials. Engineering controls have been implemented along with administrative controls, work procedures, and PPE to hrther mitigate potential exposures and hazards.

The following section describes the chemical, radiological, safety, and environmental hazards that personnel may encounter while conducting project operational activities. Hazard mitigation will be accomplished through a combination of designed engineering controls with other work controls (e.g., technical procedures, work orders, JSA, and Guide [GDE] –6212, "Hazard Mitigation Guide for Integrated Work Control Process"). This hazard mitigation strategy will be used to eliminate or mitigate project hazards in accordance with Program Requirements Document (PRD) -25, "Activity Level Hazard Identification, Analysis, and Control," to the extent possible.

2.1 Chemical and Radiological Hazards and Mitigation

Personnel may be exposed to industrial safety hazards or to radiological, nonradiological, and physical agents while conducting project operations. Designed engineering controls will be implemented along with work procedures, real-time monitoring of contaminants, and project facility-specific hazard training to hrther mitigate potential hazards and exposures. Formal preplanning (e.g., job walk-down, completion of the hazard profile screening checklists, and prejob briefing checklists), JSAs, and other work controls will be written based on the hazards identified in this HASP, technical procedures, STD-101, "Integrated Work Control Process," work packages, and operational conditions. These documents will specify specific operational hazard mitigation measures to follow.

The dominant waste forms (see Table 2-1) that will be encountered in the waste zone have been assessed based on an evaluation of shipping records for waste placed in a 40 x 40-ft area, also referred to as the Stage I area, in and near the project excavation area. The results of this assessment are shown in Table 2-1 (see Footnote D). The dominant waste form for this area of OU 7-10 is drums of Series 743 sludge (see Footnote E) containing organics such as cutting oils and carbon tetrachloride. The next significant types of waste are drums containing contaminated combustible materials. Of lesser number are drums of evaporated salts (nitrates) and drums of graphite material (believed to be intact or crushed molds).

Table 2-1. Dominant waste forms in the Stage I (project excavation) area.

Table 2-1. Dollii		te forms in the Stage I (project exca	ivation) area.	Estimated
Waste Stream	Content Code	Summary Characteristics	Packaging	Quantity
Series 741 sludge first stage sludge	001	•	40 to 50 lb of Portland cement added to bottom of drum and each of two (inner and outer plastic bags, and the top of the outer bags to absorb any free liquids. Lead sheeting may line inside of the drum as well	
Series 742 sludge second stage sludge	002	Salt plutonium and americium oxides metal oxides, and organic constituents.	,40 to 50 lb of Portland cement added in layers to absorb any free liquids. Waste is double-bagged and drummed.	27 drums
Series 743 sludge organic setups	003	Organic liquid waste solidified using calcium silicate (paste or greaselike).		379 drums
Series 744 sludge special setups	004	Complexing chemicals (liquids) including Versenes, organic acids and alcohols solidified with cement.	190 lb of Portland cement and 50 lb lof magnesia cement in drum followed by the addition of 26.5 gal of liquid waste. Additional cement top and bottom. Double-bagged.	2 drums
Series 745 sludge evaporator salts	005	Salt residue from evaporated liquids from solar ponds containing 60% sodium nitrate, 30% potassium nitrate, and 10% miscellaneous.	Salt residue packaged in plastic bag and drum. Cement added to damp or wet salt, when necessary.	42 drums
Noncombustible waste	480	Various miscellaneous waste (e.g., gloveboxes, lathes, ducting, piping, angle iron, electronic instrumentation, pumps, motors, power tools, hand tools, chairs, desks).	Varies by process line generating the waste. Waste may have been wrapped in plastic or placed directly into the waste container.	28 drums
Combustible waste	330	Dry combustible materials (e.g., paper, rags, plastics, surgeons' gloves, cloth coveralls and booties, cardboard, wood wood filter frames, polyethylene bottles).	Varies by process line generating the waste. Plastic bags used in some instances, but in other instances waste placed directly into waste container.	260 drums
Graphite	300	Graphite mold pieces after excess plutonium removal. Molds are broken into large pieces before packaging.	Drums lined with polyethylene bags nand, most likely, a cardboard liner.	22 drums
Empty 55-gal drums	No code	Empty drums that originally held lathe coolant at Rocky Flats Plant. Some drums may contain residues.	Single drum placed in cardboard carton.	544 drums

Several tables are presented in this section that identify the potential hazards that may be encountered during project operations based on known waste inventory and operational activities, which state the associated monitoring methods and other hazard-specific mitigation measures. These tables are listed below:

- Table 2-2: Total activities for radiological contaminants in OU 7-10
- Table 2-3: Chemical inventory for OU 7-10 and the Stage I area
- Table 2-4: Evaluation of chemicals and potential agents that may be encountered
- Table 2-5: Summary of project operational activities, associated hazards, and mitigation.

2.1.1 Routes of Exposure

Exposure pathways exist for radiological and nonradiological contaminants that will be encountered during project operations. Engineering controls, monitoring, training, and work controls will mitigate potential contact and uptake of these hazards to a large extent; however, the potential for exposure still exists. Exposure pathways include those listed below:

- Inhalation of radiological and nonradiological contaminated soil or fugitive dusts during waste handling and sorting, packaging, or decontaminationtasks. Inhalable or respirable (dependent on the particle aerodynamic diameter) fugitive dusts may have trace amounts of radiological or nonradiological contaminants associated with them, resulting in potential respiratory tract deposition.
- **Skin absorption and contact** with radiological and nonradiological contaminated soil or surfaces during waste handling and sorting, packaging, decontamination, or system maintenance tasks. Radiological and nonradiological contaminants can be absorbed through broken skin or by solvent action, resulting in uptake, and skin contamination or irritation.
- **Ingestion** of radiological and nonradiological contaminated soil or materials adsorbed to fugitive dust particles or waste residues, resulting in potential uptake of contaminants into the upper respiratory tract or directly into the through the gastrointestinal (GI) tract (placing contaminated surfaces in mouth) that may result in GI irritation, internal tissue irradiation, or deposition to target organs.
- **Injection** of radiological and nonradiological contaminated materials by breaking of the skin or migration through an existing wound, resulting in localized irritation, contamination, uptake of soluble contaminants, and deposition of insoluble contaminants.

Chemical and radiological hazards will be eliminated, isolated, or mitigated to the extent possible during all project operations. Where these hazards cannot be eliminated or isolated through engineering controls, monitoring for chemical and radiological hazards will be conducted (as described in Section 3) to detect and quantify exposures. Additionally, administrative controls, training, work procedures, and protective equipment will be used to hrther reduce the likelihood of exposure to these hazards through the routes of entry listed above. Table 2-5 summarizes each primary operational activity, associated hazards, and mitigation procedures.

The RWPs will be used and SWPs may be used in conjunction with this HASP to provide task- or activity-specific requirements for project operations. When used, these permits will hrther detail specialized PPE and dosimetry requirements.

Table 2-2. Total activities for radiological contaminants in Operable Unit 7-10 decayed to 34 years (1969–2003) using RadDecay. a,b

Radionuclide	Ci	Half-Life (Year)	34-Year Decay Activit (1969 to 2003) (Ci)
Am-241	3.2E+03	4.32E+02	3.5E+03
Ba-137m	5.8E-01	4.80E-05	2.5E-01
C-14	3.4E-04	5.73E+03	3.4E-04
Ce-144	4.2E-01	7.80E-01	0
CO-58	3.0E-03	1.94E-01	0
Co-60	1.2E+00	5.27E+00	1.4E-02
Cr-51	5.9E-01	7.59E-03	0
Cs-137	5.8E-01	3.02E+01	2.7E-01
Eu-154	8.8E-07	8.80E+00	6.0E-08
Eu-155	3.0E-03	2.73E+00	2.6E-05
Fe-55	1.1E+00	2.73E+00	5.0E-04
Mn-54	5.0E-03	8.57E-03	0
Nb-95	6.4E-02	9.75E-02	0
Ni-59	1.7E-04	7.60E+04	1.7E-04
Ni-63	1.3E-01	1.00E+02	1.0E-01
Pr-144	4.2E-01	3.30E-05	0
Pu-238	5.0E+01	8.77E+01	3.8E+01
Pu-239	1.7E+03	2.41E+04	1.7E+03
Pu-240	3.9E+02	6.56E+03	3.9E+02
Pu-241	1.1E+04	1.44E+01	2.1E+03
Pu-242	2.0E-02	3.75E+05	2.0E-02
Ru-106	2.1E-01	1.01E+00	0
Rh-106	2.1E-01	9.50E-07	0
Sb-125	9.1E-02	2.77E+00	1.8E-05
Sr-90	3.5E-01	2.86E+01	1.5E-01
Tc-99	5.5E-05	2.13E+05	5.5E-05
U-234	7.5E-01	2.46E+08	7.5E-01
U-235	5.3E-02	7.04E+08	5.3E-02
U-238	4.0E+00	4.47E+09	4.0E+00
Y-90	3.5E-01	1.20E-04	1.5E-01
Zr-95	6.4E-02	1.75E-02	0

2-4

Table 2-3. Chemical inventory for Operable Unit 7-10 and the Stage I area.

	•	OU 7-10	OU 7-10		
G1		Inventory	Inventory (L)	Stage I Area	Stage I Area (L)
Chemical	Content Code	(g) 4.0E+05	(L)	(g)	(L)
Asbestos	335,338,490		_	_	_
Ascorbic acid	004	1.4E+06		6.67E+04	
Beryllium	001	5.8E+04		2.70E+02	_
Beryllium	002	1.9E+04		2.59E+03	-
Beryllium (total)	001,002	7.7E+04	_	2.86E+03	
Butyl alcohol	001,002	1.1E+03	1.36E+00	5.25E+01	6.48E-02
Cadmium	001,002	5.4E+02	_	2.58E+01	_
Carbon tetrachloride	001,002,003,004	9.4E+07	1.54E+04	3.13E+07	5.13E+03
Chloroform	001,002,003,004	1.6E+05	1.07E+02	3.49E+04	2.34E+01
EDTA (assumed to be tetrasodium)	004	1.4E+06	_	6.67E+04	_
Ethyl alcohol	004	1.1E+06	1.39E+03	5.24E+04	6.64E+01
Freon 113	003	8.5E+05	1.42E+02	2.51E+05	4.74E+01
Lead		5.2E+06	_	_	_
Lithium oxide	002	Trace	_	Trace	_
Mercury	002	a	a	a	a
Methyl alcohol	004	2.2E+03	7.51E-01	1.07E+02	3.57E-02
Methyl alcohol	001,002	2.4E+03	8.01E-01	1.14E+02	3.82E-02
Methyl alcohol (total)	001,002	4.6E+03	1.55E+00	2.22E+02	7.39E-02
Methylene chloride	001,002,003,004	1.6E+05	1.20E+02	3.49E+04	2.61E+01
Polychlorinated biphenyls	003	unknown	unknown	unknown	unknown
Potassium chloride	005	1.4E+06	_	2.21E+05	_
Potassium dichromate	005	3.7E+04	_	5.84E+03	_
Potassium cyanide	002	<u></u> b		b	_
Potassium nitrate	005	3.2E+07		5.05E+06	_
Potassium phosphate	005	7.7E+05		1.22E+05	_
Potassium sulfate	005	1.4E+06	_	2.21E+05	_
Silver	INEEL waste	1.0E+00	_	_	_
Sodium chloride	005	3.0E+06		4.74E+05	_
Sodium dichromate	005	7.8E+04	_	1.23E+04	_
Sodium cyanide	002	<u></u> b	_	b	_
Sodium nitrate	005	6.50E+07	_	1.03E+07	_
Sodium phosphate	005	1.40E+06		2.21E+05	_
Sodium sulfate	005	3.00E+06		4.74E+05	_
Tetrachloroethene	003	2.70E+07	4.46E+03	8.98E+06	1.48E+03
1,1,1-Trichloroethane	001,002,003,004	2.20E+07	4.17E+03	7.31E+06	1.39E+03
Trichloroethene	003	2.50E+07	4.52E+03	8.31E+06	1.50E+03
Xylene	001,002	5.20E+03	5.98E+00	2.48E+02	2.58E-01
Zirconium	INEEL waste	1.5E+07		_	

a. Clements (1982) reports that pint bottles of mercury were periodically disposed ofthrough the Series 742 sludge waste stream. It is unknown how much, if any, mercury is in OU 7-10 or the OU 7-10 Glovebox Excavator Method Project area. A 1-pt bottle of mercury is assumed to be in the project area.

INEEL = Idaho National Engineering and Environmental Laboratory OU = operable unit

b. Two 25-lb packs of sodium cyanide or potassium cyanide pellets were distributed in Series 742 sludge waste drums buried in the Subsurface Disposal Area. It is assumed that the cyanide is in the project area.

Table 2-4. Evaluation of chemicals and potential agents that may be encountered.

Material or Chemical (Chemical Abstract Service Number, Vapor Density and Ionization Energy)"	•	Routes of Exposure'	Indicators or Symptoms of Over-Exposure ^d (acute and chronic)	f Target Organs and System	Carcinogen? (source) ^e	Matrix or Source to Be Encountered During Project Operations
Organic Compounds	S					
Ascorbic acid (50-81-7)	None established	Ih, Ig	Eye irritation	Mild irritation of eyes only	No	Content Code 004, solid
Butyl alcohol (75-65-0) VD = 2.55 IE = 9.7 eV	TLV: 20 ppm	Ih, Ig, Con	Irritation eyes, skin, nose, throat; drowsiness, narcosis	Eyes, skin, respiratory system, central nervous system	No	Content Codes 001,002, liquid
Carbon tetrachloride (56-23-5) VD = 5.3 IE-=11.5 eV	TLV: 5 ppm STEL: 10 ppm Ceiling: 25 ppm	Ih, Ig, S, Con	Irritation eyes, skin; central nervous system depression; nausea, vomiting; liver, kidney injury; drowsiness, dizziness, uncoordination; (potential occupational carcinogen)	Central nervous system, eyes, lungs, liver, kidneys, skin	Yes—NIOSH A2-ACGIH	Content Codes 001 through 004, liquid
Chloroform (67-66-3) VD = 4.12 IE = 11.4eV	TLV: 10 ppm	Ih, Ig, S, Con	Irritation eyes, skin; dizziness, mental dullness, nausea, confusion; headache, lassitude (weakness, exhaustion); anesthesia; enlarged liver; (potential occupational carcinogen)	Liver, kidneys, heart, eyes, skin, central nervous system	No	Content Codes 00 1 through 004, liquid
Diesel fuel (68476-34-6) VD = 1.0 IE = NA	TLV: 100 mg/m ³ (ACGIH—diesel fuel vapor or aerosol)	Ih, Ig, S, Con	Eye irritation; respiratory system changes; dermatitis		No	Fuel handling during refueling of excavator and other diesel powered equipment
Diesel exhaust (particulate aerodynamic diameter <1 µm)	TLV: 0.02 mg/m ³ (ACGIH 2002)	Ih	Respiratory, nose, throat of lung irritation with stinging and redness of the eyes; headache; nausea; dizziness: unconsciousness		A2—ACGIH	Exhaust from excavator and other diesel-powered equipment

2	
\neg	

Table 2-4. (continued)

Material or Chemical (Chemical Abstract Service Number, Vapor Indeators or Symptoms of Matrix or Source to Be Exposure Limit^b Over-Exposure^d Density and Ionization Routes of Carcinogen? Target Organs and **Encountered During** Energy)" (PEL/TLV) (acute and chronic) (source)e **Project Operations** Exposure' System Ig, S EDTA (tetrasodium) None established Eye, skin, and mucous Eyes, skin No Content Code 004, solid (64-02-8)membrane irritation Ethyl alcohol TLV: 1000 ppm Ih, Ig, S, Con Irritation eyes, skin, nose; Eyes, skin, No Content Code 004, liquid (64-17-5)headache, drowsiness, respiratory system, fatigue, narcosis; cough; VD = 1.6central nervous $IE = 10.47 \, eV$ liver damage; anemia; system, liver, blood, reproductive, teratogenic reproductive system effects. Freon 113 TLV: 1000 ppm Ih, Ig, Con Irritation skin, throat, Skin, heart, CNS No Content Code 003, liquid (76-13-1)drowsiness, dermatitis; cardiovascular VD = 2.9STEL: 1250 ppm CNS depressant and system IE = 11.99eVdepression (in animals); cardac arrhythmia, narcosis. Methyl alcohol TLV: 200 ppm Ih, Ig, S, Con Eye, skin, nose and throat Eyes, skin, Content Codes 001.002. No (67-56-1)irritation; headache; and 004 respiratory system, VD = 1.11drowsiness; optic nerve **CNS** IE = 10.84 eVatrophy; chest tightness; narcosis Methylene chloride TLV: 50 ppm Ih, Ig, S, Con Eye and skin irritation; Eyes, skin, Yes—NIOSH Content Codes 001 (75-09-2)OSHA (29 CFR 1910.1052, fatigue, weakness, cardiovascular A3—ACGIH through 004, liquid VD = 2.92002) somnolence, system, CNS IE = 11.3eVPEL: 25 ppm lightheadedness; STEL: 125 ppm numbness, tingle limbs; nausea TLV: 0.5 mg/m^3 —skin Polychlorinated Ih, Ig, S, Con Eye irritation; chloracne; Skin, eyes, liver, Yes-NTP Content Code 003 liver damage; reproductive reproductive system Yes-IARC biphenyls not specified (Aroclor-1254 used for effects No-OSHA toxicological evaluation purposes)

2-	
∞	

Table 2-4. (continued)

Material or Chemical (Chemical Abstract Service Number, Vapor Density and Ionization Energy)"		Routes of Exposure'	Indcators or Symptoms of Over-Exposure ^d (acute and chronic)	Target Organs and System	Carcinogen?	Matrix or Source to Be Encountered During Project Operations
Tetrachloroethene $(127-18-4)$ VD = 5.8 IE = 9.3 eV	TLV: 25 ppm STEL: 100 ppm	Ih, Ig, S, Con	Eye, skin, nose, throat, and respiratory system irritation; nausea; flush face, neck; vertigo, dizziness, uncoordination; headache, somnolence; skin erythema; liver damage	respiratory system, liver, kidneys, CNS	Yes—NIOSH	Content Code 003, liquid
1,1,1-Trichloroethane (71-55-6) VD = 4.6 IE= 11.1eV	TLV: 350 ppm STEL: 450 ppm	Ih, Ig, Con	Eye and skin irritation; headache, lassitude, CNS depressant or depression, poor equilibrium; dermatitis; cardiac arrhythmias; liver damage	Eyes, skin, CNS, cardovascular, liver	No A4—ACGIH	Content Codes 00 1 through 004, liquids
Trichloroethene (79-01-6) $VD = 4.53$ $IE = 9.5 eV$	TLV: 50 ppm STEL: 100 ppm	Ih, Ig, S, Con	Eye and skin irritation; headache, vertigo; visual disturbance, fatigue, giddiness, tremor, somnolence, nausea, vomiting; dermatitis; cardac arrhythmias, paresthesia; liver injury	Eyes, skin, respiratory system, heart, liver, kidneys, CNS		Content Code 003, liquid
Xylene (total) (95-47-6) VD = 5.2 IE = 8.6 eV	TLV: 100 ppm STEL: 150 ppm	Ih, Ig, S, Con	Headache, loss of appetite, nervousness and pale skin; skin rash; eye damage; damage to bone marrow, causing low blood cell count; liver and kidney damage		No	Content Codes 001 and 002, liquid

T-1-1-2 4 4	(1)
Table 2-4. ((continuea)

	Material or Chemical (Chemical Abstract Service Number, Vapor Density and Ionization Energy)"	Exposure Limit ^b (PEL/TLV)	Routes of Exposure'	Indicators or Symptoms of Over-Exposure ^d (acute and chronic)	f Target Organs and System	Carcinogen?	Matrix or Source to Be Encountered During Project Operations	
	Inorganic Compound	Inorganic Compounds						
	Asbestos (12001-29-5) VI–NA	TLV: 0.1 fiberkc PEL: 0.1 fiberkc Excursion Limit: 1.0 fiberkc in 30 minutes (29 CFR 1926.1101, 2002)	Ih, Ig, Con	Irritation of eyes and skin, chronic asbestosis, restricted pulmonary function	Eyes, respiratory tract, lung lining	A1-ACGIH Yes-NTP Yes-IARC Yes-OSHA	Content Codes 335, 338, and 490	
	Beryllium (7440-41-7) VD = NA	TLV: 0.002 mg/m ³ STEL: 0.01 mg/m ³	Ih, Con	Berylliosis; anorexia, weight loss, weakness, chest pain, cough, clubbing of fingers, cyanosis, pulmonary insufficiency; irritation eyes; dermatitis	Eyes, skin, respiratory system	Yes-NTP Yes-IARC NO-OSHA	Content Codes 001 and 002. solid	
29	Cadmium (7440-43-9) VD = NA	TLV: 0.01 mg/m ³ Respirable: 0.002 mg/m ³ PEL: 5 µg/m ³ Action level: 2.5 µg/m ³ (29 CFR 1926,1127,2002)	Ih, Ig	Pulmonary edema, dyspnea, cough, chest tightness, substernal pain; headache; chills, muscle aches; nausea, vomiting, diarrhea; anosmia, emphysema, proteinuria, mild anemia	Respiratory system, kidneys, prostate, blood	Yes-NTP Yes-IARC A2-ACGIH Yes-OSHA	Content Codes 001 and 002, solid	
	Lead (7439-92-1) VD = NA	TLV: 50 μg/m ³ OR A PEL in μg/m ³ equal to 400 divided by the number of hours worked per day for shifts longer than 8 hours. (29 CFR 1926.62, 2002)	Ih, ¸, Con	Weakness, lassitude, insomnia; facial pallor; anorexia, weight loss, malnutrition; constipation abdominal pain, colic; anemia; gingival lead line; tremor; paralysis wrist, ankles; encephalopathy; kidney disease; irritation eyes; hypotension		No	Content Code (unknown), solid	

/	د
Ļ	_
_	5

Table 2-4. (continued) Material or Chemical (Chemical Abstract Service Number, Vapor Indicators or Symptoms of Matrix or Source to Be Exposure Limit^b Over-Exposure^d **Density and Ionization** Routes of Target Organs and Carcinogen? **Encountered During** Energy)" (PEL/TLV) Exposure' (acute and chronic) (source)e **Project Operations** System Lithium oxide None established Ih, Ig, Con Corrosive to eyes, skin, Skin and eyes No Content Code 002, solid (12057-24-8)nose and throat (corrosive) (trace amounts only) VD = NATLV: 0.025 mg/m^3 —skin Ih, Ig, S, Con Irritation eyes, skin; Eyes, skin, Content Code 002, liquid Mercury No STEL: $0.03 \,\mathrm{mg/m^3}$ cough, chest pain, respiratory system, dyspnea, bronchitis CNS, kidneys pneumonitis; tremor, insomnia, irritability, indecision, headache, fatigue, weakness; stomatitis, salivation; gastrointestinal disturbance, anorexia, weight loss; proteinuria None established Content Code 005, solid Potassium chloride Ih, Ig, Con Eyes, irritation of mucous None identified. No (7447-40-7)membranes primarily a localized VD = NAirritant PEL: 5 mg/m³ Content Code 002g Potassium cyanide Ih, Ig, S, Con Irritation eyes, skin, upper Eyes, skin, No (150-50-8)respiratory system; respiratory system, VD = NAcardiovascular asphyxia; lassitude (weakness, exhaustion), system, central headache, confusion; nervous system, nausea, vomiting; thyroid, blood increased respiratory rate, slow gasping respiration; thyroid, blood changes Potassium &chromate TLV: 0.05 mg/m³ (chromate) Ih, Ig, Con Respiratory, eyes, dermis, Skin (chromate) Yes-NPT Content Code 005, solid (7778-50-9)(chromate) skin irritation. Yes-IARC VD = NAdiscoloration, mucous No-Z List membrane ulcerating, No-OSHA perforated septum (chromate) (chromate)

١,	د
ш	_

Table 2-4. (continued						
Material or Chemical (Chemical Abstract Service Number, Vapo Density and Ionization Energy)"		Routes of Exposure'	Indicators or Symptoms of Over-Exposure ^d (acute and chronic)	f Target Organs and System	Carcinogen?	Matrix or Source to Be Encountered During Project Operations
Potassium nitrate (7757-79-1) VD = NA	None established	Ih, Ig, Con	Respiratory irritation, (Ig—GI pain, nausea and vomiting)	None identified, primarily a localized irritant	No I	Content Code 005, solid
Potassium phosphate (7778-77-0) VD = NA	None established	Ih, Ig, Con	Eyes, minor skin irritation	None identified, primarily a localized irritant	No I	Content Code 005, solid
Potassium sulfate (7778-80-5) VD = NA	None established	Ih, Ig	None identified	None identified	No	Content Code 005, solid
Silver (7440-22-4) VD = NA	TLV: 0.1 mg/m ³ TLV: 0.01 mg/m ³ (soluble compounds as silver)	Ih, Ig, Con	Blue-gray eyes, nasal septum, throat, skin; irritation, ulceration skin; gastrointestinal disturbance	Nasal septum, skin, eyes	No	Content Code INEEL waste, solid
Sodium chloride (7647-14-5) VP-NA	None established	Ih, Ig, Con	Eyes, irritation of mucous membranes	None identified, primarily a localized irritant	No l	Content Code 005, solid
Sodium cyanide (143- 33-9) VD = NA	PEL: 5 mg/m ³	Ih, Ig, S, Con	Irritation eyes, skin; asphyxia; lassitude (weakness, exhaustion), headache, confusion; nausea, vomiting; increased respiratory rate; slow gasping respiration; thyroid, blood changes	Eyes, skin, cardiovascular system, central nervous system, thyroid, blood	No	Content Code 002 ^g
Sodium &chromate (10588-01-9) VD = NA	TLV —0.05 mg/m ³ (chromate	e)Ih, Ig, Con (chromate)	Respiratory, eyes, skin irritation or ulcerating (chromate)	Kidneys, liver (chromate)	Yes-NPT Yes-IARC Yes-Z List Yes-OSHA (chromate)	Content Code 005, solid

Table 2-4. (continued))					
Material or Chemical (Chemical Abstract Service Number, Vapor Density and Ionization Energy)"	,	Routes of Exposure'	Indicators or Symptoms of Over-Exposure ^d (acute and chronic)	f Target Organs and System	Carcinogen? (source) ^e	Matrix or Source to Be Encountered During Project Operations
Sodium nitrate (7631-99-4) VD = NA	None established	Ih, Ig, Con	Respiratory, eyes, dermis, (Ih/Ig may cause cyanosis)		No	Content Code 005, solid
Sodium phosphate (7558-79-4) VD = NA	None established	Ih, Ig, Con	Respiratory, eyes, dermis	None identified, primarily a localized irritant	No	Content Code 005, solid
Sodium sulfate (7757-82-6) VD = NA	None established	Ih, Ig, Con	Respiratory, eyes, dermis	None identified, primarily a localized irritant	No	Content Code 005, solid
Zirconium (7440-67-7) VD = NA	TLV: 5 mg/m ³ STEL: 10 mg/m ³	Ih, Con	Skin, lung granulomas; irritation skin, mucous membrane; X-ray evidence of retention in lungs	system	No	Content Code INEEL waste, solid
Radionuclides (as list	ed in Table 2-1)		<u>-</u>			
Radionuclides (radiation fields)	ALARA, dose limit, in accordance with RWP Posting of radiation areas in accordance with INEEL Radiological Control Manual Thermoluminescent dosimeters will be used to measure whole body TEDE.	Whole Body	Alarming electronic dosimetry or stationary radiation monitors or alarms, criticality alarm, and elevated readings on direct-reading instruments	Blood-forming cells, GI tract, and rapidly dividing cells	Yes—IARC	OU 7-10 waste and waste streams, assay system
Radionuclides (fixed and removable surface contamination)	ALARA, dose limit, in accordance with RWP Posting of contamination areas in accordance with PRD-183	Ih, Ig, broken skin	Alarming CAMs, high counts on portable air samplers, direct-reading instruments, swipe counter (scaler), and alarm indication on personal contamination monitors.	GI tract, ionization of internal tissue through uptake of radionuclides	Yes—IARC	Contamination from OU 7-10 waste and waste streams

Table 2-4. (continued)

Material or Chemical (Chemical Abstract Service Number, Vapor Density and Ionization Energy)"		Routes of Exposure'	Indicators or Symptoms o Over-Exposure ^d (acute and chronic)	f Target Organs and System	Carcinogen? (source) ^e	Matrix or Source to Be Encountered During Project Operations
Radionuclides (airborne radioactivity)	ALARA, dose limit, in accordance with RWP 10% of derived air concentration for specific radionuclide selected (10 CFR 835,2002) Posting of airborne radioactivity areas in accordance with PRD-183	Ih, Ig, broken skin	Alarming CAMs, high counts on portable air samplers and personal air samplers.	GI tract, ionization of internal tissue through uptake of radionuclides	Yes	OU 7-10 waste and waste streams. Entry into RCS or contaminated areas of PGS.

a. Material safety datasheets for chemicals other than waste types are available at the project.

g. Two 25-lb packs of sodium cyanide or potassium cyanide pellets were distributed in Series 742 sludge waste drums buried in the SDA. It is assumed that the cyanide is in the project area.

ACGIH = American Conference of Governmental Industrial Hygienists	IH = industrial hygienist	PGS = Packaging Glovebox System
ALARA = as low as reasonably achievable	INEEL = Idaho National Engineering and Environmental Laboratory	PRD = program requirements document
CAM = constant air monitor	NIOSH = National Institute of Occupational Safety and Health	RCS = Retrieval Confinement Structure
$CFR = Code \ of \ Federal \ Regulations$	NTP = National Toxicology Program	RWP = radiological work permit
CNS = central nervous system	OSHA = Occupational Safety and Health Administration	SDA = Subsurface Disposal Area
GI = gastrointestinal	OU = operable unit	TEDE =total effective dose equivalent
IARC = International Agency for Research on Cancer	PEL = permissible exposure limit	TLV = threshold limit value

b. ACGIH (2002); 29 CFR 1910(2002), 29 CFR 1926(2002); and substance-specific standards.

c. (Ih) inhalation; (Ig) ingestion; (S) skin absorption; (Con) contact hazard.

d. (Nervous system) dizziness, nausea, lightheadedness; (dermis) rashes, itching, redness; (respiratory) respiratory effects; (eyes) tearing, irritation.

e. If yes, identify agency and appropriate designation (ACGIH A1 or A2, NIOSH, OSHA, IARC, NTP).

f. Clements (1982) reports that pint bottles of mercury were periodically disposed ofthrough the Series 742 sludge waste stream. It is unknown how much, if any, mercury is in OU 7-10 or the OU 7-10 Glovebox Excavator Method Project area. A 1-pt bottle of mercury is assumed to be in the project area.

Table 2-5. Summary of proiect operational activities. associated hazards. and mitigation."

	Activity or Task	Associated Hazards or Hazardous Agent	Hazard Mitigation						
E	Excavation Operations (RCS)								
•	Overburden sampling Overburden removal Waste retrieval Underburden sampling	Radiological: Contamination —OU7-10 waste material. Radiation exposure —OU 7-10 waste material. Airborne radioactivity —Dust from waste material. Criticality — Accumulation of high FGE material with moderator and proper geometry.	Safety-significant systems and engineering controls (confinement) of the RCS, DSS, controlled access, stationary continuous air and radiation monitors, criticality monitor and alarm, TPRs with hold points, qualified equipment operator, RWP, direct-reading instruments, compliance with PRD-183 radiological posting requirements, PPE, use of TLDs and supplemental dosimetry, and contamination surveys.						
o	Sample handling and transportation	Chemical and nonradiological contaminants—OU7-10 waste material, airborne contaminants, chemical use for project RCS operations, equipment operation (CO), excavator fuel, preventive maintenance.	Safety-significant systems and engineering controls (confinement) of the RCS, DSS, controlled access, area monitors and direct-reading instruments, TPRs with hold points, qualified equipment operator, JSAs, MSDS for all chemicals used, active exhaust system for excavator, and PPE.						
		Pinch points, and struck-by or caught-between hazards— Equipment movement and vehicle traffic, forklift movement, soil sack loading and handling, empty drum handling.	Technical procedures, equipment inspections, qualified equipment operators (hoisting and rigging) and forklift operators, backup alarms, JSAs, designated traffic lanes and areas, watch body position, and PPE.						
		Lifting and back strain—Staging excavator stands, end effectors, and support materials; handling core sampling equipment; manual excavation of overburden; manual overburden sample collection	Mechanical equipment to lift and position heavy items, proper lifting techniques, two-person lifts if items are over 50 lb (or one-third of the person's body weight, whichever is less) or awkward or unbalanced, body position awareness, and use of stands or designed jigs or fixtures for holding heavy items during manipulation tasks.						
		Heat and cold stress — Working outdoors and tasks requiring use of protective clothing and respiratory protection.	Industrial hygienist monitoring, PPE, training, work and rest cycles as required (MCP-2704), stay times documented on RWMC Form 315, "OU 7-10 Operations Excavation Inspection" (or equivalent).						

Activity or Task	Associated Hazards or Hazardous Agent	Hazard Mitigation		
	Tripping hazards and working and walking surfaces — Uneven surfaces and terrain, ice-, snow-, mud-covered or wet surfaces, probes in pit, lines and cords, and ladders.	Good housekeeping, awareness of walking surfaces, salt and sand icy areas (where required), and use of nonskid or high-fiction materials on walking surfaces, lines and cords maintained out of established aisles and walkways, proper footwear, and three-point contact when ascending and descending ladder.		
	Stored energy sources — Elevated materials, electrical, compressed gases, hoisting and rigging (soil sacks), fire (reheling), running vehicles.	Secure all materials stored at elevated locations, identify and mark all utilities, ensure all lines and cords are checked for damage and continuity, use GFCI (circuit or receptacle) for a outdoor equipment and for all temporary installations, compl with minimum clearances for overhead lines, and secure compressed cylinders, caps, and bottles before movement, conduct inspections of equipment, grounding and bonding during all refueling operations, set brake and use tire chalks where appropriate, and do not leave any running vehicles or equipment unattended.		
	Hazardous noise—Areas around equipment and when operating equipment.	Source identification and labeling, Industrial Hygiene sound level monitoring and dosimetry, isolation, and PPE (as required).		
Glovebox Operation	s (PGS)			
Waste packagingWaste SortingWaste handling	Radiological: Contamination—OU 7-10 waste material. Radiation exposure—OU 7-10 waste material and radiological	Safety significant systems and engineering controls (confinement) of the PGS, controlled access, air and radiation monitors, FMM, TPRs with hold points, qualified glovebox operators, RWP, direct-reading instruments, compliance with		
 Drum preparation Drumloadout	sources Criticality — Overloaded drum.	PRD-183 radiological posting requirements, PPE, use of TLDs and supplemental dosimetry, and contamination		

surveys.

Activity or Task	Associated Hazards or Hazardous Agent	Hazard Mitigation		
	Cutting, crushing, and pinch points—Glovebox tools and equipment, sizing operations, debris handling, sampling.	Follow manufacturer's operating instructions, keep areas clear of nonessential materials, wear required PPE (as listed in the JSA), be aware of body position and other glovebox personnel before starting and during tool use.		
	Hazardous noise—Sizing tools and during operation of the forklift.	Source identification and labeling, IH sound level monitoring or dosimetry, isolation, and PPE (as required).		
General Proiect Ope	rational Support Tasks			
 Drum handling Forklift operations Waste transportation and storage Waste inspections	Radiological: Contamination—OU 7-10 waste material. Radiation exposure—OU 7-10 waste material. Assay system operation—drum assay for storage.	Engineering controls, controlled access, TPRs, qualified positions (where required), RWP, direct-reading instruments, collection and counting of swipes, compliance with PRD-183 radiological posting requirements, interlocks (assay system), PPE, use of TLDs and supplemental dosimetry, and contamination surveys.		
• Drumassay	Chemical and nonradiological contaminants — OU 7-10 waste container handling, chemical use for project operations, equipment operation, reheling, preventive maintenance, cryogenics (LN_2) for assay detector cooling.	Engineering controls, controlled access, area monitors and direct-reading instruments, TPRs, JSAs, MSDS for all chemicals used, compliance with PRD-5038, requirements for cryogenic use and handling, and PPE.		
	Pinch points, struck-by or caught-between hazards — Equipmen drum movement, forklift operations, material handling tasks.	t, Technical procedures, equipment inspections, qualified forklift operators, JSAs, backup alarms, designated traffic lanes and areas, proper body position, and PPE.		
	Lifting and back strain—Material handling, handling and positioning waste containers and sample movement.	Mechanical lifting devices (e.g., forklift) to lift and move heavy waste items, proper lifting techniques, two-person lifts if items are over 50 lb (or one-third of the person's body weight, whichever is less) or awkward or unbalanced, and awareness of body position. An IH may perform ergonomic assessments as deemed appropriate.		
	Heat and cold stress—Support work outdoors	Monitoring by IH, PPE, training, and work-rest cycles (as required).		

Activity or Task

	Tripping hazards and working and walking surfaces — Uneven surfaces and terrain, ice-, snow-, mud-covered or wet surfaces, lines and cords, entry into waste storage area, and ladders.	Good housekeeping, awareness of walking surfaces, salt and sand icy areas (where required), and use nonskid or high-fiction materials on walking surfaces, proper footwear, keep lines and cords out of established aisles and walkways, and three-point contact when ascending and descending ladder.		
	Stored energy sources — Elevated materials (stored drums and waste), compressed gas (P_{10}), running industrial vehicles (forklift).	Secure all materials stored at elevated locations, inspect all lines and cords before use, use GFCI (circuit or receptacle) for all outdoor equipment and where liquids may be present, secure compressed cylinders, caps, and bottles before movement, conduct inspections of tools, set brake and use tire chalks where appropriate, and do not leave any running vehicles or equipment unattended.		
	Hazardous noise—Areas around equipment and when operating some equipment or while using hand tools.	Source identification and labeling, IH sound level monitoring or dosimetry, isolation, and PPE (as required).		
Decontamination Ta	sks			
 Operational tools and equipment RCS and PGS decontamination 	Radiological: Contamination—OU7-10 waste material. Radiation exposure—Hot particles or dose rate associated with decontamination waste and debris.	Radiological work permit, RCT surveys, hold points, direct-reading instruments, collection and counting of swipes, compliance with PRD-183 radiological posting requirements, PPE, and use of dosimetry or survey requirements, and ALARA principles (Section 4).		
	Chemical and nonradiological contaminants—Contaminants associated with decontamination process and secondary waste streams generated.	Controlled areas, JSAs, SWPs (as required), air monitoring and sampling, direct-reading instruments, TPRs, and PPE.		
	Pinch points, struck-by, and caught-between—Positioning items to be decontaminated.	Job safety analyses, TPRs, watch body position, and PPE.		
	Lifting and back strain—Moving and positioning components and decontamination waste containers.	Use mechanical lifting devices where possible, proper lifting techniques and two-person lifts if items are over 50 lb (or one-third of the person's body weight, whichever is less) or in awkward or unbalanced situations, and an IH will conduct ergonomic evaluation of tasks (as required).		

Associated Hazards or Hazardous Agent

Hazard Mitigation

Table 2-5. (continued)

Activity or Task	Associated Hazards or Hazardous Agent	Hazard Mitigation			
	Heat and cold stress — Working outdoors and in PPE	Monitoring by IH, PPE, training, work and rest cycles as required (MCP-2704), stay times documented on SWP (or equivalent).			
	Tripping hazards and working and walking surfaces — Uneven surfaces and terrain, ice- and snow-covered and wet surfaces.	Awareness of walking surfaces, salt and sand icy areas, and use nonskid or high-fiction materials on walking surfaces, wear adequate footwear with traction sole.			
	Electrical—Use of electrical equipment or equipment in area where water of wet surfaces are present.	Use of GFCI outlets or extension cords outdoors and where water or wet surfaces are present. Use of barrier material to isolate overspray.			
Maintenance of Pro	oject Systems				
 Electrical Piping, valves, fittings, hoses Communication	Radiological contamination — Contactwith waste material, contaminated equipment, and components. Radiation exposure — In close proximity to waste containers and contamination with associated dose rate.	Engineering controls (confinement), RWP, RCT surveys, work package hold points, direct-reading instruments, collection and counting of swipes, compliance with PRD-183 radiological posting requirements, PPE, and use of dosimetry and survey requirements, and ALARA principles (Section 4).			
Heating, and ventilatingMechanical equipment	Chemical and inorganic contaminants—Contact with waste material, contaminated equipment, and components, hydraulic fluids, fuel, and use of chemicals associated with maintenance tasks.	Controlled areas, JSAs, SWPs (as required), work package hold points, air monitoring and sampling, direct-reading instruments, MSDS for all chemicals, and PPE.			
	Pinch points, struck-by or caught-between hazards—Equipment, drum movement, forklift operations, material handling tasks.	Technical procedures, equipment inspections, qualified forklift operators, JSAs, designated traffic lanes and areas, backup alarms, watch body position, and PPE.			
	Lifting and back strain—Moving and positioning components.	Use mechanical lifting and positioning devices, proper lifting techniques and two-person lifts if items are over 50 lb (or one-third of the person's body weight, whichever is less) or awkward and unbalanced, IH conduct ergonomic evaluation of tasks (as required).			
	Heat and cold stress — Working outdoors and in PPE	Industrial hygienist monitoring, PPE, training, work-rest cycles as required (MCP-2704), stay times documented on SWP (or equivalent).			

Activity or Task	Associated Hazards or Hazardous Agent	Hazard Mitigation			
	Tripping hazards and working-walking surfaces — Uneven surfaces and terrain, ice- and snow-covered and wet surfaces, and ladders.	Awareness of walking surfaces, salt and sand icy areas, and use nonskid or high-fiction materials on walking surfaces, wear adequate footwear with traction sole, and three-point contact when ascending and descending ladder.			
	Hoisting and rigging — Equipment and component movement and placement, project overhead hoists.	Qualified operators; equipment and rigging inspections; hoisting and rigging operations in accordance with MCP-6501, MCP-6502, MCP-6503, MCP-6504, and MCP-6505; and applicable facility supplement.			
	Stored energy — Electrical, mechanical, thermal, elevated materials, pressurized systems, cylinders, and fire systems.	Piping and conduit labeling, LO/TO training, Standard-101 work packages, LO/TO in accordance with MCP-3650, MCP-3651, and PRD-5051.			
	Elevated work or work near open excavation.	Fall protection training, use of fall protection system and devices, fall protection competent person, and follow all requirements of PRD-5096.			
Facility Lay-up					
 Backfill excavation Fix removable contamination Decontamination on RCS and PGS Secure WMF-671 	Radiological: Contamination—OU7-10 waste material. Radiation exposure—Hot particles or dose rate associated with decontamination waste and debris.	Engineering controls (ventilation), controlled areas, TPRs, RWP, RCT surveys, fixed and portable air sampling instruments, hold points, direct-reading instruments, collection and counting of swipes, compliance with PRD-183 radiological posting requirements, PPE, and use of dosimetry and survey requirements, and ALARA principles (Section 4).			
• Secure WWF-071 Weather Enclosure Structure	Chemical and nonradiological contaminants—Contaminants associated with decontamination process and secondary waste streams generated, decontamination solutions, spray fixative compound(s), grout, fuel, hydraulic fluids, compressed gas cylinders.	Controlled areas, TPRs, JSAs, SWPs (as required), MSDS for chemicals used for decontamination, fixative, grout and fluids drained, air monitoring and sampling, direct-reading instruments, PPE.			
	Pinch points, struck-by, or caught-between — Vehicle and equipment movement, material and equipment handling, use of hand and power tools.	Vehicles use designated traffic lanes and ramps, backup alarms, JSAs, TPRs, watch body position, and wear PPE.			

Activity or Task Associated Hazards or Hazardous Agent **Hazard Mitigation** Lifting and back strain—Moving and positioning grout hose, Use mechanical lifting devices where possible, proper lifting lifting components, positioning equipment, carrying techniques and two-person lifts if items are over 50 lb (or onedecontamination and fixadent equipment and supplies or third of the person's body weight, whichever is less) or awkward and unbalanced, IH conduct ergonomic evaluation of components. tasks (as required). Industrial hygienist monitoring, PPE, training, work-rest Heat and cold stress—Working outdoors and in PPE cycles as required (MCP-2704), stay times documented on SWP (or equivalent). Tripping hazards and working-walking surfaces—Uneven Awareness of walking surfaces, salt and sand icy areas, and use nonskid or high-fiction materials on walking surfaces, surfaces and terrain, ice- and snow-covered and wet surfaces, keep lines and cords out of established aisles and walkways, plastic sheeting, cords, hoses, and lines, and ladders. wear adequate footwear with traction sole. Use of GFCI outlets or extension cords outdoors and where Electrical—Use of electrical equipment or equipment in area where water of wet surfaces are present. water or wet surfaces are present. Use of barrier material to

a. All hazards Will be identified, evaluated and controls established in accordance with PRD-25, "Activity Level Hazard Identification, Analysis, and Control," requirements. Additionally, project assigned industrial hygienist, safety professional, and Radiological Control personnel will be available to assist With the PRD-25 process and to assist in the develop of TPRs, work orders or packages, and permits associated with project operational activities.

ALARA = as low as reasonably achievable
DSS = dust-suppression system
FMM = fissile material monitor
GFCI = ground-fault circuit interrupter
JSA = job safety analysis
LO/TO = lockout and tagout
MCP = management control procedure

MSDS = material safety datasheet OU = operable unit PGS = Packaging Glovebox System PPE = personal protective equipment PRD = program requirements document RCS = Retrieval Confinement Structure

RCT = radiological control technician

RWP = radiological work permit SWP = safe work permit

TLD = thermoluminescent dosimeter

TPR = technical procedure

isolate overspray.

2.2 Safety and Physical Hazards and Mitigation

Industrial safety and physical hazards will be encountered while performing project operations. Section 4.2 provides general safe-work practices that must be followed at all times. This section describes specific industrial safety hazards and procedures to be followed to eliminate or minimize safety and physical hazards that will be encountered by project personnel.

2.2.1 Material Handling and Back Strain

Material handling and maneuvering of various pieces of equipment, drums, end effector stands, and waste in the PGS during project operations may result in employee injury. Mechanical lifting devices such as hoists and forklifts will be used wherever possible to eliminate the need for manual materials handling and lifting. Where these devices are not feasible, lifting and material-handling tasks will be performed in accordance with MCP-2692, "Ergonomic Program." Personnel will not physically lift objects weighing more than 50 lb or 33% of their body weight (whichever is less) alone.

The IH will conduct ergonomic evaluations of various project operations to determine the potential ergonomic hazards presented by various material handling and equipment use operations. Following this evaluation, the IH will provide recommendations to mitigate these hazards including additional engineering controls or work practices. Applicable requirements from MCP-2739, "Material Handling, Storage, and Disposal," also will be followed.

2.2.2 Repetitive Motion and Musculoskeletal Disorders

Project operational tasks such as material handling and glovebox operations may expose personnel to repetitive-motion hazards, undue physical stress, overexertion, awkward postures, or other ergonomic risk factors that may lead to musculoskeletal disorders. Musculoskeletal disorders can cause a number of conditions including pain, numbness, tingling, stiffjoints, difficulty moving, muscle loss, and sometimes paralysis. The assigned project industrial hygienist will evaluate project tasks and provide recommendations to reduce the potential for musculoskeletal disorders in accordance with MCP-2692.

2.2.3 Working and Walking Surfaces

Slippery work surfaces can increase the likelihood of back injuries, overexertion injuries, slips, and falls. Project operations inside the WMF-671 WES will present potential tripping or slip hazards from uneven flooring surfaces, equipment cords, pit surface during manual excavation (probes), wet surfaces or floor obstructions. Outside the WMF-671 WES the potential for slip, trip, and fall hazards will increase during winter months because of ice- and snow-covered surfaces. All personnel will be made aware of tripping hazards that cannot be eliminated by marking them (e.g., probes). All operations personnel will wear required protective footwear with adequate traction sole to hrther mitigate slip and fall potential. Tripping and slip hazards will be evaluated during the course of the project in accordance with PRD-5103, "Walking and Working Surfaces."

2.2.4 Proper Housekeeping to Prevent Slips, Trips, and Falls

The floor of every WMF-671 WES, RCS, and PGS area shall be maintained, so far as possible, in a clean and dry condition. All walking and working surfaces will be kept clean, orderly, and free of foreign objects to prevent possible slip, trip, and fall hazards. Proper drainage and use of dry standing stations will be provided where wet processes (e.g., decontamination) are used that could cause a potential slip and fall hazard. All tools and equipment used during each shift will be placed back in the designated storage location unless required to be left in place. Cords and lines will be routed around walkways, stairs,

and entrances and exits to eliminate tripping hazards. Elevated walkways and platforms will be kept clear of potential tripping hazards at all times.

2.2.5 Elevated Work Areas

Personnel performing maintenance tasks or other operations may be required to work on elevated equipment or at heights above 6 ft. Personnel required to access the RCS area around the pit excavation (with an unprotected side or edge [trench box] which is 6 ft or more above a lower level) shall be protected from falling by the use of guardrail systems, personal fall-arrest systems or fall restraint system (travel restriction system) that prevents personnel from approaching the fall hazard in accordance with PRD-5096, "Fall Protection."

Although not anticipated, leading edge work in areas that will not allow for traditional fall protection controls will require a fall protection plan to be prepared in accordance with PRD-5096. Additionally, the following MCP requirements will be followed as they relate to project operations associated with elevated work:

- MCP-2709, "Aerial Lifts and Elevating Work Platforms"
- PRD-5067, "Ladders"
- PRD-5098, "Scaffolding."

2.2.6 Means of Egress

Established means of egress (continuous and unobstructed way of travel to an exit, exit access, and exit discharge) shall be maintained within all WMF-671 WES and RCS areas in accordance with NFPA 101 (2000), "Life Safety Code," requirements. This includes emergency lighting, illumination of signs, and marking of means of egress. A functional test of emergency lighting shall be conducted on every required emergency lighting system at 30-day intervals for not less than 30 seconds. An annual test shall be conducted on every required battery-powered emergency lighting system for not less than 1-1/2 hours (unless the system meets the exception under the Section 7.9.3 of the "Life Safety Code"). Equipment shall be fully operational for the duration of the test. Written records of the visual inspections and tests shall be maintained.

2.2.7 Powered Equipment and Tools

Powered equipment and tools will be used during project operations for material handling and glovebox operations. Use of this equipment presents potential physical hazards (e.g., pinch points, electrical hazards, flying debris, struck-by, and caught-between)to personnel operating them. All portable equipment and tools will be properly maintained and used by qualified individuals and in accordance with the manufacturer's specifications. At no time will safety guards be removed. Requirements from PRD-510l, "Portable Equipment and Handheld Power Tools," will be followed for all work performed with powered equipment including hand tools. All tools will be inspected by the user before use.

2.2.8 Electrical Hazards and Energized Systems

Electrical equipment and tools, as well as maintenance of project facility electrical systems, may pose shock or electrocution hazards to personnel. Ground-fault protected electrical circuits and receptacles in combination with safety-related work practices will be employed to prevent electric shock or other injuries resulting from direct or indirect electrical contact. All electrical work will be reviewed

and completed under the appropriate work controls (e.g., TPRs or work orders). Before conducting electrical work, hazardous energy of the affected system will be brought to a zero energy state through the use of isolation methods in accordance with the following:

- MCP-3650, "Chapter IX Level I Lockouts and Tagouts"
- MCP-3651, "Chapter IX Level II Lockouts and Tagouts"
- Applicable facility supplemental procedures for the system or component being worked

If work on energized systems is necessary, these practices will conform to the requirements in PRD-5099, "Electrical Safety," and Parts I through III of the NFPA 70E (2000), "Electrical Safety Requirements for Employee Work Places." Additionally, all electrical and other utilities will be identified before conducting surface penetration maintenance activities in accordance with PRD-22, "Exicavation and Surface Penetrations."

2.2.9 Operational Fire Hazards and Prevention

The Fire Hazards Analysis for the OU 7-10 Glovebox Excavator Method Project (Call 2003) and the hazards analysis identify the fire hazards as fire involving the following:

- Contents of the excavation pit
- Retrieval equipment
- Materials in the PGS
- Combustible materials in the WMF-671 WES exterior to the RCS and PGS, and fire involving packaged waste materials during transport.

From the inventory discussion in Section 2, approximately 21% of the waste material in the excavation area is considered combustible. Nitration reaction and mixtures with free-flammable or combustible liquids may have increased the flammability of the combustible materials. Combustible liquids (mainly oils in both damaged and intact containers) are expected. Pyrophoric metals in the form of plutonium oxide or hydrated plutonium oxide are present in small quantities in the retrieval area. These could be fire initiators. There is no indication that other pyrophoric metals such as zirconium turnings are in the excavation area. Hydrogen generation, because of the radiolysis of waste zone materials, is expected in staged and stored containers of waste; however, because of the deteriorated condition of waste containers in the retrieval area and venting of drums, the risk of an explosion from retrieved containers is very low (Call 2003).

Firewater distribution for the project is provided through a connection to the existing RWMC firewater distribution system. The project dry-pipe, deluge, and fire department hose systems interface with the RWMC firewater distribution system at the Fire Riser Building. Because of excavation restrictions at the SDA, the firewater delivery system from the Fire Riser Building to the suppression systems is aboveground and is maintained dry to ensure the system will not freeze during cold weather.

Project objectives identified by DOE Order 420.1A, "Facility Safety," are met by the Project Fire Hazards Analysis (Call 2003). Review and approval of an equivalency request by NE-ID also found that the fire protection strategy adequately satisfies the fire protection objectives of DOE Order 420.1A, and that it has been demonstrated that an equivalent level of fire protection to that specified in NFPA 801

(1998), "Standard for Fire Protection for Facilities Handling Radioactive Material," has been provided (see Footnote B).

2.2.10 Flammable and Combustible Materials Hazards

Fuel will be required for the excavator and other equipment during project operations. Flammable hazards include transfer and storage of flammable or combustible liquids in the project operations area. Portable fire extinguishers with a minimum rating of 10A or 60BC shall be strategically located at the facility to combat Class ABC fires. Portable fire extinguishers will be located in all active project operations areas, on or near all facility equipment that has exhaust heat sources, and on or near all equipment capable of generating ignition or having the potential to spark. When storing project chemicals, MCP-2707, "Compatible Chemical Storage," will be consulted. The requirements of PRD-308, "Handling and Use of Flammable and Combustible Liquids," will be followed at all times.

- **2.2.10.1 Combustible Materials.** Combustible or ignitable materials in contact with or near exhaust manifolds, catalytic converters, or other ignition sources could result in a fire. The assigned fire protection engineer should be contacted if questions arise about potential ignition sources. The accumulation of combustible materials will be strictly controlled in all project operational areas including the surrounding project and support trailers area. Class A combustibles (e.g., trash, cardboard, rags, wood, and plastic) will be properly disposed of in appropriate waste containers. The fire protection engineer also may conduct periodic site inspections to ensure all fire protection requirements are being met.
- **2.2.10.2** Flammable and Combustible Liquids. Fuel used at the project for heling the excavator and generator(s) must be safely stored, handled, and used. Only portable containers approved by Factory Mutual and Underwriters Laboratories (labeled with the contents) will be used to store flammable liquids. All fuel containers will be stored at least 50 ft from any facilities and ignition sources, stored inside an approved flammable storage cabinet or tank meeting the requirement s of NFPA 30 (1998), "Flammable and Combustible Liquids Code." Portable motorized equipment (e.g., generators and light plants) will be shut off and allowed to cool down in accordance with the manufacturer's operating instructions before being refueled to minimize the potential for a fuel fire.
- **2.2.10.3 Welding, Cutting, or Grinding.** Personnel conducting welding, cutting, or grinding tasks may be exposed to molten metal, slag, and flying debris. Additionally, a fire potential exists if combustible materials are not cleared from the work area. Requirements from PRD-5110, "Welding, Cutting, and Other Hot Work," will be followed whenever these types of activities are conducted. This includes the requirement for a hot work permit (documented on a safe work permit) and designation of a fire watch.

2.2.11 Pressurized Systems

Pressurized plant and breathing air systems will be operated in support of project operations. The hazards presented to personnel, equipment, facilities or the environment because of inadequately designed or improperly operated pressure systems (vessels) include blast effects, shrapnel, fluid jets, equipment damage, personnel injury, and death. These systems can include pneumatic, hydraulic, or compressed-gas systems. The applicable requirements in PRD-5, "Boilers and Unfired Pressure Vessels," must be followed as well as the manufacturer's operating and maintenance instructions. This includes inspection, maintenance, and testing of systems and components in accordance with applicable American National Standards Institute (ANSI) requirements.

All pressure systems will be operated within the designed operating pressure range, which is typically 10 to 20% less than the maximum allowable working pressure. Additionally, all hoses, fittings,

lines, gauges, and system components will be rated for the system for at least the maximum allowable working pressure (generally the relief set point). The project safety professional should be consulted about any questions of pressure systems in use at the project site.

2.2.12 Cryogenics

Cryogenics may be used in support of project operations for cooling of detectors or other applications. If required, all cryogenic tasks will be conducted and protective equipment worn in accordance with PRD-5038, "Cryogenic Liquids." Personal protective equipment will be worn at all times when handling, transferring, or dispensing cryogenic liquids in accordance with PRD-5038. Additional hazards associated with cryogenic liquids include the following:

- **Pressure buildup:** Boiling of liquefied gases within a closed system increases pressure. Cryogenic liquids will not be contained in a closed system other than an approved Dewar. Cold fingers and similar devices have exploded when either an ice dam has formed within the apparatus or when users created a closed system by shutting off all of the valves.
- Oxygen enrichment: Liquid nitrogen may fractionally distill air, causing liquid oxygen to collect in the cryogenic container. Liquid oxygen increases the combustibility of many materials, creating potentially explosive conditions. Adequate venting will be provided when working with cryogenic liquids in a closed system or enclosed space.
- **Asphyxiation:** If vented into a closed space, a cryogenic liquid will vaporize, displacing oxygen and possibly causing asphyxia. Cryogenic liquid will not be stored in a closed space.
- **Embrittlement:** Cryogenic liquids will not be disposed of down any drains. Ordinary materials such as metal or PVC piping may not be able to withstand cryogenic temperatures. Cryogenic liquids will be allowed to evaporate in a well-ventilated area. Materials exposed to cryogenic temperatures for long periods or materials that have undergone periodic warming and freezing will be examined regularly for cracks and warping.

2.2.13 Compressed Gases

Compressed gases may be used in support of project operations. If used, all cylinders will be used, stored, handled, and labeled in accordance with PRD-5040, "Handling and Use of Compressed Gases." All transportation, handling, storage, and use of compressed-gas cylinders will be conducted in accordance with the Compressed Gas Association Pamphlet P-1-1965, "Safe Handling of Compressed Gases" (CGA 1965). Additionally, the assigned project safety professional should be consulted about any compressed gas cylinder storage, transport, and use issues.

2.2.14 Excavator, Equipment, and Vehicle Hazards

The excavator and forklifts will be used as part of the project operations. Hazards associated with the operation of the excavator and forklifts include injury to personnel (e.g., struck by and caught between hazards), equipment contact with the RCS, and property damage. All equipment will be operated in the manner in which it was intended and in accordance with the manufacturer's instructions or equipment design. Only authorized qualified personnel will be allowed to operate equipment. Personnel in proximity to operating equipment must maintain visual communication with the operator and stay out of the arm swing radius. Personnel also must comply with the applicable requirements of the following:

MCP-2745, "Heavy Industrial Vehicles"

- PRD-5123, "Motor Vehicle Safety"
- DOE-STD-1090-01, Chapter 10, "Forklift Trucks."

Additional safe practices will include the following:

- All parked forklifts will have the forklift times in the lowered position (resting on ground or floor).
- All heavy equipment and industrial vehicles will have backup alarms.
- Walking directly behind or to the side of equipment without the operator's knowledge is prohibited.
- While operating equipment in the work area, the equipment operator will maintain communication
 with a designated person who will be responsible for providing direct voice contact or approved
 standard hand signals. In addition, all facility personnel in the immediate work area will be made
 aware of the equipment operations.
- All equipment will be operated away from established traffic lanes and personnel access ways (whenever possible) and will be stored so as not to endanger personnel at any time.
- All unattended equipment will have appropriate reflectors or be barricaded if left on or next to roadways.
- All parked equipment will have the parking brake set and chocks will be used when equipment is parked on inclines.
- Personnel will be protected from the excavator swing radius when working inside the RCS. This may be accomplished by any or a combination of the following as determined appropriate by the safety professional and documented in work control. The swing radius area may be barricaded or marked to warn personnel, train personnel on the swing radius and the safe work practices required for the task and work location, or shutting down the excavator when personnel are working inside the swing radius area.

2.2.15 Excavation, Surface Penetrations, and Outages

No utilities or lines are buried in the project area to be excavated. Existing Type A and B probes will be hand excavated during overburden excavation. During waste removal, the Type A probes will be dislodged and set aside.

Excavation of the targeted project area will progress in the sequence specified in the *Excavation Plan and Sequential Process Narrative for the OU 7-10 Glovebox Excavator Method Project* (Jamison and Preussner 2002). The basic sequence will involve the following:

- Hand excavation around areas that will be hard to reach with the excavator (e.g., cluster of probes). A rough estimate of the manually excavated material is 120 ft³ or about two soil sacks.
- The backhoe will remove overburden soils in two passes (depth of 2 ft followed by removal of the remaining overburden on the next pass) across the entire dig area, and removed overburden soil will be placed in soil sacks.

Waste excavation will proceed in stages with three discrete sections being excavated in sequence:

- Section 1 will excavate approximately one-half of the total pit volume and will core sample the underburden within this section
- Section 2 will remove the remaining balance of the waste zone material to be removed and will core sample the underburden within this section
- Section 3 will expose the underburden in proximity of the P9-20 probe for sampling.

All of the required underburden core sampling will be performed within these sections. A 52% angle of repose for the excavation will try to be maintained if the excavator is not capable of cutting vertical faces through the waste.

Modifications to the project structures in support of operations that will require surface penetrations. No surface penetrations will be allowed or conducted until the area has been evaluated and an approved subsurface evaluation documented. All surface penetrations and related outages will be coordinated through the field supervisor and will require submittal of a Form 433.01, "Outage Request." The submission of an outage request will not be considered an approval to start the work.

All excavation and surface penetration activities will be conducted and monitored in accordance with PRD-22, "Excavation and Surface Penetrations," and 29 CFR 1926 9 (2002), Subpart P, "Excavations." Key elements from these requirements include the following:

- Daily inspections of excavations and protective systems (shoring box) will be made by a competent person (visual inspection from outside the RCS) for evidence of situations that could result in possible cave-ins, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions. Inspections also will be made following any hazard-increasing occurrence. These inspections are required only when employee exposure can be reasonably anticipated and will be documented on RWMC Form 152, "OU 7-10 Operations Excavation Inspection," or equivalent.
- Designs of support systems, shield systems, and other protective systems shall be selected and constructed in accordance with the requirements set forth in 29 CFR 1926(2002), Subpart P. The project shoring system and excavation method has been designed and approved by a professional engineer.
- When material or equipment used for protective systems is damaged, a competent person shall examine the material or equipment and evaluate its suitability for continued use. If the competent person cannot ensure the material or equipment is able to support the intended loads or is otherwise suitable for safe use, then such material or equipment shall be removed from service, and shall be evaluated and approved by a registered professional engineer before being returned to service.

2.2.16 Hoisting and Rigging of Equipment

A hoist system in the PGS will be use in support of project operation and maintenance tasks. All hoisting and rigging operations will be performed in accordance with MCP-6501, "Hoisting and Rigging Operations," MCP-6502, "Hoisting and Rigging Maintenance," MCP-6503, "Inspection and Testing of Hoisting and Rigging Equipment," MCP-6504, "Hoisting and Rigging Lift Determination and Lift Plan Preparation," MCP-6505, "Hoisting and Rigging Training," and DOE-STD-1090-01 as applicable for these project operations.

Hoisting and rigging equipment will show evidence of a current inspection (e.g., tag) and be inspected before use by designated operators. Additionally, if mobile crane or boom trucks are used in support of project operations, the operator or designated person for mobile cranes or boom trucks will perform a visual inspection each day or before use (if the crane has not been in regular service) of items such as, but not limited to, the following:

- All control mechanisms for maladjustment that would interfere with proper operation
- Crane hooks and latches for deformation, cracks, and wear
- Hydraulic systems for proper oil level
- Lines, tanks, valves, pumps, and other parts of air or hydraulic systems for leakage
- Hoist ropes for kinking, crushing, birdcaging, and corrosion
- All anti-two-block, two-block warning, and two-block damage prevention systems for proper operation.

Note: The operator or other designated person will examine deficiencies and determine whether they constitute a safety hazard. If deficiencies are found, they will be reported to the safety professional.

2.2.17 Overhead Hazards

Personnel may be exposed to overhead impact (contact) hazards during the course of the project operations from walking in, between, and around operational equipment and support structures in the WMF-671 WES, RCS, PGS, and storage buildings. Sources for these hazards will be identified and mitigated in accordance with PRD-5103, "Walking and Working Surfaces." In the case of overhead impact hazards, they will be marked by using engineering-controlsprotective systems where there is a potential for falling debris, in combination with head protection PPE.

2.2.18 Personal Protective Equipment

Wearing PPE will reduce a worker's ability to move freely, see clearly, and hear directions and noise that might indicate a hazard. In addition, PPE can increase the risk of heat stress. Work activities at the task site will be modified as necessary to ensure that personnel are able to work safely in the required PPE. Work-site personnel will comply with PRD-5121, "Personal Protective Equipment," and MCP-432, "Radiological Personal Protective Equipment." All personnel who wear PPE will be trained in its use and limitations in accordance with PRD-5121 and 29 CFR 1910(2002), Subpart I, "Personal Protective Equipment."

2.2.19 Decontamination

Decontamination of waste containers, powered equipment, tools, and WMF-671WES, RCS, and PGS components will be required as part of project operations. Decontamination procedures for personnel and equipment are detailed in Section 11. Potential hazards to personnel conducting decontamination tasks include back strain; slip, trip, and fall hazards; and cross-contamination from contaminated surfaces. Additionally, electrical hazards may be present if water is used in areas with exposed electrical cords or receptacles. Mitigation of these walking working surfaces and electrical hazards are addressed in prior subsections. If a power washer or heated power washer is used, units will be operated in accordance with

manufacturer's operating instructions, personnel will wear appropriate PPE to prevent high-pressure spray injuries, use GFCI protection, and these tasks will only be conducted in approved areas. Personnel will wear required PPE at all times during decontamination tasks as listed in Section 5 and as listed on the associated JSA and RWP.

2.3 Environmental Hazards and Mitigation

Potential environmental hazards will present potential hazards to personnel during project operations. These hazards will be identified and mitigated to the extent possible. This section describes these environmental hazards and states what procedures and work practices will be followed to mitigate them.

2.3.1 Noise

Personnel performing project operations activities may be exposed to noise levels from the excavator trucks, hand tools, and compressors that exceed 85 decibel A-weighted (dBA). For an 8-hour time-weighted average (TWA), 83 dBA for 10-hour TWA. The effects of high sound levels (noise) may include the following:

- Personnel being startled, distracted, or fatigued
- Physical damage to the ear and pain and temporary or permanent hearing loss
- Interference with communication that would warn of danger

Where noise levels are suspected of exceeding 80 dBA, noise measurements will be performed in accordance with MCP-2719, "Controlling and Monitoring Exposure to Noise," to determine if personnel are routinely exposed to noise levels in excess of the applicable TWA (85 dBA for 8 hours of exposure or lower TWA for 10- or 12-hour work-shift exposures).

Note: Exposures exceeding 8 hours per day will be evaluated by the assigned project IH.

Personnel whose noise exposure routinely meets or exceeds the allowable TWA will be enrolled in the INEEL Occupational Medical Program (OMP) (or subcontractor hearing conservation program as applicable). Personnel working on jobs that have noise exposures greater than 85 dBA will be required to wear hearing protection until noise levels have been evaluated and will continue to wear the hearing protection specified by the IH until directed otherwise. Hearing protection devices will be selected and worn in accordance with MCP-2719.

2.3.2 Heat and Cold Stress and Ultraviolet Light Hazards

Project operational tasks will be conducted during times when there is a potential for both heat and cold stress that could present a potential hazard to personnel. The assigned IH will be responsible for obtaining meteorological information to determine if additional heat or cold stress administrative controls are required. All operations personnel must understand the hazards associated with heat and cold stress and take preventive measures to minimize the effects. Management Control Procedure-2704 (2002), "Heat and Cold Stress," guidelines will be followed when determining work and rest schedules or when to halt work activities because of temperature extremes.

2.3.2.1 Heat Stress. High ambient air temperatures can result in increased body temperature, heat fatigue, heat exhaustion, or heat stroke that can lead to symptoms ranging from physical discomfort, to

unconsciousness, to death. In addition, operational tasks requiring the use of PPE or respiratory protection prevent the body from cooling. Personnel must inform their supervisor when experiencing any signs or symptoms of heat stress or observing a fellow employee experiencing such symptoms.

Heat stress stay times will be documented on the appropriate work control document(s), that is, an SWP, prejob briefing form, RWMC Form 315, or other when personnel wear PPE that may increase heat body burden. These stay times will take into account the amount of time spent on a task, the nature of the work (i.e., light, moderate, or heavy), type of PPE worn, and ambient work temperatures. Table 2-6 lists heat stress signs and symptoms of exposure.

Individuals showing any of the symptoms of heat exhaustion listed in Table 2-6 shall do the following:

- Stop work
- Exit or be helped from the work area
- Remove and decontaminate PPE (as applicable)
- Move to sheltered area to rest
- Be provided cool drinking water
- Be monitored by a medic or employee certified in cardiopulmonary resuscitation (CPR) and first-aid.

Table 2-6. Heat stress signs and symptoms of exposure.

Heat-Related Illness	Signs and Symptoms	Emergency Care
Heat rash	Red skin rash and reduced sweating.	Keep the skin clean, change all clothing daily, and cover affected areas with powder containing cornstarch or with plain cornstarch.
Heat cramps	Severe muscle cramps and exhaustion, sometimes with dizziness or periods of faintness.	Move the patient to a nearby cool place; give the patient half- strength electrolytic fluids; if cramps persist, or if signs that are more serious develop, seek medical attention.
Heat exhaustion	Rapid, shallow breathing; weak pulse; <u>cold</u> , <u>clammy skin</u> ; <u>heavy perspiration</u> ; total body weakness dizziness that sometimes leads to unconsciousness.	Move the patient to a nearby cool place, keep the patient at rest, give the patient half-strength electrolytic fluids, treat for ; shock, and seek medical attention. DO NOT TRY TO ADMINISTER FLUIDS TO AN UNCONSCIOUS PATIENT.
Heat stroke	Deep, then shallow, breathing; rapid, strong pulse, then rapid, weak pulse; dry, hot skin; dilated pupils; loss of consciousness (possible coma); seizures or muscular twitching.	Cool the patient rapidly. Treat for shock. If cold packs or ice bags are available, wrap them and place one bag or pack under each armpit, behind each knee, one in the groin, one on each wrist and ankle, and one on each side of the neck. Seek medical attention as rapidly as possible. Monitor the patient's vital signs constantly. DO NOT ADMINISTER FLUIDS OF ANY KIND.

Note: Heat exhaustion and heat stroke are extremely serious conditions that can result in death and should be treated as such. The shift supervisor should immediately request an ambulance (777 or 526-1515) be dispatched from the Central Facilities Area (CFA) - 1612 medical facility and the affected individual cooled as described in Table 2-6 based on the nature of the heat stress illness.

Monitoring for heat stress conditions shall be performed in accordance with MCP-2704. Depending on the ambient weather conditions, work conditions, type of PPE worn, and the physical response of work operations personnel, the IH shall inform the field supervisor or RCT of necessary adjustments to the work and rest cycle. Additionally, physiological monitoring may be conducted to determine if personnel are replenishing liquids fast enough. A supply of cool drinking water will be provided in designated eating areas and consumed only in these areas. Project personnel may periodically be interviewed by the IH, RCT, or safety professional to ensure that the controls are effective and that excessive heat exposure is not occurring. Workers will be encouraged to monitor personal body signs and to take breaks if symptoms of heat stress occur.

2.3.2.2 Low Temperatures and Cold Stress. For outdoor project-support operations, personnel will be exposed to low temperatures during fall and winter months or at other times of the year if relatively cool ambient temperatures combine with wet or windy conditions. The IH will be responsible for obtaining meteorological information to determine if additional cold stress administrative controls are required. Appendices B and C of MCP-2704 discuss the hazards and monitoring of cold stress. Table 2-7 provides the cold stress work and warm-up schedule if cold stress conditions exist (late fall, winter, early spring).

Additional cold weather hazards may exist from working on snow- or ice-covered surfaces. Slip, fall, and material-handling hazards are increased under these conditions. Every effort must be made to ensure walking surfaces are kept clear of ice. The assigned project safety professional should be notified immediately if slip or fall hazards are identified at any project location.

- **2.3.2.3 Ultraviolet Light Exposure.** Personnel will be exposed to ultraviolet light (UV) (i.e., sunlight) when conducting project operations outdoors. Sunlight is the main source of UV known to damage the skin and to cause skin cancer. The amount of UV exposure depends on the strength of the light, the length of exposure, and whether the skin is protected. No UV rays or suntans are safe. The following are mitigative actions that should be taken to minimize UV exposure:
- Wear clothing to cover the skin (long pants [no shorts] and long-sleeve or short-sleeve shirt [no tank tops])
- Apply a sunscreen with a sun protection factor of at least 15 to areas exposed to the sun
- Wear a hat (hard hat where required)
- Wear UV-absorbing safety glasses
- Limit exposure during peak intensity hours of 10 a.m. to 4 p.m. whenever possible.

Table 2-7. Cold stress work and warm-up schedule.

Air	No Noticeal	ble Wind	Wind 5 mp		Wind 10 mg		Win 15 m		Win 20 m	
Temperature °F (Approximate)	Maximum Work Period	Number of Breaks	Maximum Work Period	Number of Breaks	Maximum Work Period	Number of Breaks	Maximum Work Period	Number of Breaks	Maximum Work Period	Number of Breaks
-15 to -19	Normal breaks	1	Normal breaks	1	75 minutes	2	55 minutes	3	40 minutes	4
-20 to -24	Normal breaks	1	75 minutes	2	55 minutes	3	40 minutes	4	30 minutes	5
-25 to -29	75 minutes	2	55 minutes	3	40 minutes	4	30 minutes	5	Nonemergency	y work
-30 to -34	55 minutes	3	40 minutes	4	30 minutes	5	Nonemergeno	cy work	should cease	
-35 to -39	40 minutes	4	30 minutes	5	Nonemergency	y work	should cease			
-40 to -44	30 minutes	5	Nonemergency	y work	should cease					
-45 and below	Nonemergency should cease	y work	should cease							

2.3.3 Confined Spaces

Entry inside the gloveboxes has been identified as a confined space entry in the OU 7-10 Project operations area. Work in confined spaces can subject personnel to risks involving engulfment, entrapment, oxygen deficiency, and toxic or explosive atmospheres. If confined spaces are identified at the OU 7-10 Project area, they will be evaluated in accordance with MCP-2749, "Confined Spaces," to determine if they are permit-required. If entry into identified project confined spaces is required, then all requirements of MCP-2749 will be followed.

2.3.4 Biological Hazards

The project facilities and support buildings and structures provide habitat for various rodents, insects, and vectors (i.e., organisms that carry disease-causing microorganisms from one host to another). The potential exists for encountering nesting materials or other biological hazards and vectors. Hantavirus may be present in the nesting and fecal matter of deer mice. If such materials are disturbed, it can become airborne and create a potential inhalation pathway for the virus. Contact and improper removal of these materials may provide additional inhalation exposure risks.

If suspected rodent nesting or excrement material is encountered, the assigned IH will be notified immediately and **no attempt will be made to remove or to clean the area.** Following an evaluation of the area, disinfection and removal of such material will be conducted in accordance with MCP-2750, "Preventing Hantavirus Infection."

Snakes, insects, and arachnids (e.g., spiders, ticks, and mosquitoes) also may be encountered at the project. Common areas to avoid include material stacking and staging areas, under existing structures (e.g., trailers and buildings), under boxes, and other areas that provide shelter. Protective clothing will generally prevent insects from direct contact with the skin. If potentially dangerous snakes or spiders are found or are suspected of being present, warn others, keep clear, and contact the assigned IH for additional guidance as required.

Insect repellant (DEET or equivalent) may be required. Areas where standing water has accumulated (e.g., evaporation ponds) provide breeding grounds for mosquitoes and should be avoided. In cases where a large area of standing water is encountered, it may be necessary to pump the water out of the declivity (areas other than the established SDA ditches and silt basin).

2.3.5 Inclement Weather Conditions

When inclement or adverse weather conditions develop that may pose a threat to persons or property at the project area (e.g., sustained strong winds 25 mph or greater, electrical storms, heavy precipitation, or extreme heat or cold) these conditions will be evaluated and a decision made by the IH, safety professional, RCT, and other operations personnel, as appropriate, to stop work, employ compensatory measures or proceed with operations. The shift supervisor and operations personnel shall comply with INEEL MCPs and facility work control documents and design requirements that specify limits for project operations.

During all project activities, assigned health and safety professionals in consultation with RadCon and the shift supervisor will determine if wind or other weather conditions pose unacceptable hazards to personnel or the environment.

2.4 Other Project Hazards

Project personnel should continually look for potential hazards and immediately inform the shift supervisor or other operations lead personnel of the hazards so that action can be taken to correct the condition. All personnel have the authority to initiate STOP WORK actions in accordance with MCP-553, "Stop Work Authority," if it is perceived that an imminent safety or health hazard exists or take corrective actions within the scope of the work control authorization documents to correct minor safety or health hazards and then inform the shift supervisor.

Personnel working at the project are responsible to use safe-work practices, report unsafe working conditions, near misses or acts, and exercise good housekeeping habits during project operations with respect to tools, equipment, and waste.

2.5 Site Inspections

The shift supervisor, IH, safety professional, RCT, and operations personnel may participate in project site inspections during the work control preparation stage of the project (e.g., the hazard identification and verification walkdowns), and conduct self-assessments or other inspections. Additionally, periodic safety inspections will be performed by the operations supervisors and assigned health and safety professionals in accordance with MCP-3449, "Safety and Health Inspections."

Targeted or required self-assessments will be performed during project operations in accordance with MCP-8, "Self-Assessment Process for Continuous Improvement," as directed by the operations manager or shift supervisor. All inspections and assessments will be documented and available for review by the shift supervisor, as a minimum. Health and safety professionals present during project operations may, at any time, recommend changes in work habits to the shift supervisor. However, all changes that may affect the facility written work control documents (e.g., HASP, JSAs, RWPs, SWPs, and work orders) must have concurrence from the appropriate operations technical discipline representative onsite and a Form 412.11, "Document Management Control Systems (DMCS) Document Action Request (DAR)," prepared for the applicable document as required.